FINAL REPORT

UPDATE OF PAVEMENT MANAGEMENT PROGRAM

(Citywide)

2024-2029



City of Compton, CA
July 26, 2024

BUCKNAM
INFRASTRUCTURE GROUP, INC

Revised 9-4-24

July 26, 2024

Mr. John Strickland
Public Works Project Manager
City of Compton
205 South Willowbrook Avenue
Compton, CA 90220

Subject: **Final Report - Update of the Pavement Management Program**

Dear John:

As part of the 2024 Update of the Pavement Management Program for the City of Compton, *Bucknam Infrastructure Group, Inc. (Bucknam)* is pleased to submit the Final Report for the City's pavement network.

The information contained in this report was used to develop the recommended improvement program for the pavement network. The report covers the following categories:

- **Executive Summary (Section I)**

- **Pavement Management Program Development and Reporting (Section II)**

- **Pavement Conditions For Each Segment in the Network (PCI Report – Section III)**
  The Pavement Condition Index report shows the present condition of each street in the pavement network. In addition, the report shows the basic geometry of each street segment.

- **Forecast Maintenance Reports (Section IV)**

  - **Recommended Maintenance and Repair Strategies**
    The recommended maintenance and repair strategies were used to generate the Forecasted Maintenance & Rehabilitation Report and were based on our 2024 inspections. Additionally, we have assessed and incorporated unit cost and maintenance application practices/types with our strategies.

  - **Projected Projects based on M&R Strategies**
    The Forecasted Maintenance & Rehabilitation Report projects the street maintenance activities required for the next five years, broken down to show maintenance levels for Arterials and Collectors streets. The report included in this section is broken down by fiscal year.

BUCKNAM
INFRASTRUCTURE GROUP, INC
3548 Seagate Way, Suite 230
Oceanside, CA 92056
T: (760) 216-6529
www.bucknam-inc.com

Our thorough analysis of previous and current Compton PMP strategies enabled our staff to make proactive recommendations to the City's pavement CIP. All comments received from the City have been incorporated in the reports that follow. All of the City's issues and needs that were brought to our attention are included in the report. It has been a pleasure working with you and the City on updating your Pavement Management Program. We look forward to the continued success of this project and future teamwork with City staff.

Sincerely,

Bucknam Infrastructure Group, Inc.



Peter J. Bucknam
Project Manager
Infrastructure Management – GIS Services

TABLE OF CONTENTS

I. Executive Summary
- A. Compton Pavement Network
- B. Current Citywide Conditions
- C. Maintenance Strategy Development
- D. Annual Budget Projections
- E. Quality Control Efforts
- F. Findings and Recommendations

II. Pavement Management Program-Capital Improvement Program
- A. Pavement Management Program Update 2023-24
- B. Maintenance Strategy Assignments
- C. Multi-Year Annual Work Program Projects
  - i. Actual Budget ($10 million/yr)
  - ii. Maintain PCI Budget
- D. Condition Distribution Report
- E. Calculation of PCI
- F. Compton MyRoads® PMP Web-Portal
- G. Sample Distress Photos – Recommended Treatment

III. Pavement Condition Index (PCI) Reports
- A. Pavement Condition Index Reports - Definitions
- B. 2024 Compton PCI Map
- C. Name Order (A-Z)
- D. PCI Order (0-100)

IV. Forecast Maintenance / Rehabilitation Report
- A. Projected Annual Budget Recommendations, Five Year Plan (2024-2029)

Table and Figure Reference **Page #**

Figure 1 – Pavement Area by Rank Sec 1-2
Figure 2 – Historical Compton PCI Findings (FY 2014-2024) Sec 1-3
Figure 3 – PCI Distribution for All Streets (by section mi.) Sec 1-6
Figure 4 – Sample Pavement Life Cycle Sec 2-3
Figure 5 – Resulting Network PCI & Budget Expenditures (Actual Budget) Sec 2-7
Figure 6 – Resulting Network PCI & Budget Expenditures (Maintain Budget) Sec 2-10
Figure 7 – PCI Calculation Worksheet Sec 2-13
Figure 8 – Compton MyRoads® PMP Web-Portal Sec 2-14
Figure 9 – Arterial/Collector Condition Distribution Sec 2-15
Figure 10 – Local Condition Distribution Sec 2-15
Figure 11 – Sample Distress Photos – Recommended Treatment Sec 2-16
Figure 12 – 2024 Compton PCI Map Sec 3-4

Table 1 – Historical and Summary Findings for Compton PMP Network Sec 1-3
Table 2 – Condition Distribution by Mileage for All Streets Sec 1-4
Table 3 – Neighboring City PCI's Sec 1-4
Table 4 – Citywide Projection Utilizing "Actual" Budget Sec 1-9
Table 5 – Five-Year Projection Demonstrating Required Budget to Maintain PCI of 61 Sec 1-9
Table 6 – PCI Range Sec 2-2
Table 7 – Maintenance Strategy Assignments Sec 2-2
Table 8 – Citywide Projection Utilizing "Actual" Budget ($10.0 mil/yr) Sec 2-6
Table 9 – Five-Year Projection Demonstrating Required Budget to Maintain PCI of 61 Sec 2-9

Acronym Listing

American Society for Testing and Materials (ASTM)
Army Corps of Engineers (ACOE)
Asphalt Concrete (AC)
Asphalt Rubber Hot Mix (ARHM)
Average Daily Traffic (ADT)
Capital Improvement Program (CIP)
Geographic Information System (GIS)
Los Angeles County MTA (METRO)
Maintenance and Repair (M&R)
Pavement Condition Index (PCI)
Pavement Management Program (PMP)
Portland Cement Concrete (PCC)
Remove & Replace (R&R)

SECTION I
EXECUTIVE SUMMARY

2024 UPDATE OF PAVEMENT MANAGEMENT SYSTEM

This report reflects the continued commitment and proactive management of the City's Pavement Management Program (PMP); the last major update to the City's PMP was performed in 2021. As the City of Compton continues to show growth in its population, demographics, infrastructure and maintenance needs, the street network is demonstrating similar needs in regard to capital revenues and capital improvement program management.

Today, the City is currently using the Army Corps of Engineers pavement management program, MicroPAVER, to manage the 205 miles within street network. This software is essential to the City in that it assists Public Works staff in identifying what levels of annual funding are needed to maintain and/or improve the pavement conditions across the network. These funds are vital for the annual arterial / collector street capital improvement program projects as well as for cost-effectively managing the local network through proactive cyclical maintenance/rehabilitation and scheduling. Under this project, the City has incorporated the update of its unique Pavement Management – GIS MyRoads® PMP web-portal and GIS layers that assist the City in spatially analyzing pavement conditions and economic needs for a given pavement segment or citywide.

The Compton PMP has been developed to assist City personnel by providing current data on the City street networks and to develop cost-effective maintenance / rehabilitation strategies to maintain a desirable level of pavement performance on a network scale; this optimizes the expenditure of limited fiscal resources. The PMP efforts in 2023-24 consisted of analyzing the City's previous PMP dataset for quality and usability. City staff also provided key information pertaining to the ongoing maintenance/rehabilitation efforts that have occurred throughout the City since 2021. In doing this, we were tasked to generate an updated Capital Improvement Program report that identified deficiencies and recommendations in the current operating and maintenance efforts put forth by the City.

For the 2024 project, our staff surveyed all routes within the network to assist the City in complying with Los Angeles County MTA (METRO) PMP requirements and analyzed historical maintenance operations. Specifically, the program provides administrators and maintenance personnel with:

* *The present condition status of the pavement network (arterial, collector, and local streets), as a whole and of any grouping or individual component within the City;*
* *A ranked list of all streets, or segments of streets, by condition within the network;*
* *Rehabilitation/maintenance needs of qualifying street segments by year;*
* *An optimized priority maintenance and rehabilitation program based on cost/benefit analysis and various levels of funding;*
* *Optimum annual budget levels for pavement maintenance for the current and the following five (5) years;*

* *Prediction of the future performance of the City's pavement network and each individual street section; and*
* *Pavement network and conditional data presented in **ArcMap, MyRoads*** and is compatible with City's existing GIS Enterprise

Pavement is a dynamic structure where deterioration is constantly occurring; thus the pavement management system needs to be updated on a regular basis to reflect these changes in pavement conditions, pavement maintenance histories, and maintenance strategies based upon budgetary constraints. In our approach to develop the City's forecasted maintenance recommendations we worked with Compton staff in identifying unit costs for all maintenance practices used on an annual basis. Currently, based upon the City's maintenance practices and their associated unit costs, the total replacement value of the pavement network is $410,734,300. This value clearly indicates that the City's pavement network is the most valuable and essential asset to Compton. The City's use of slurry seal, overlay and R&R practices are typically applied at a five year, ten year and 25 year frequency respectively. These frequencies are typical but the City may see increases in deterioration rates due to environmental, load and high average daily traffic (ADT) volumes. For example, high ADT volumes along one of Compton's arterial streets will increase deterioration rates for a previously applied AC Overlay compared to a small local street. These deterioration rates are monitored through frequent inspections and functional class deterioration analysis within the City's PMP database.

This report reflects our findings and recommendations for the PMP and the current state of the City's pavement network. Furthermore, we have recommended detailed funding and maintenance strategies for the arterial/collector and residential networks for next five (5) years.

A. COMPTON PAVEMENT NETWORK

Within the Compton pavement management network there are approximately 81.5 miles of Arterial-Collector streets consist of approximately 14,932,179 SF of pavement which consists of 426 pavement sections. The Local network consists of approx. 123.3 miles of streets, 19,207,990 SF of pavement which consists of 913 pavement sections. Combined, the entire network consists of 204.8 miles of streets and 34,140,169 SF of pavement and 1,339 sections.

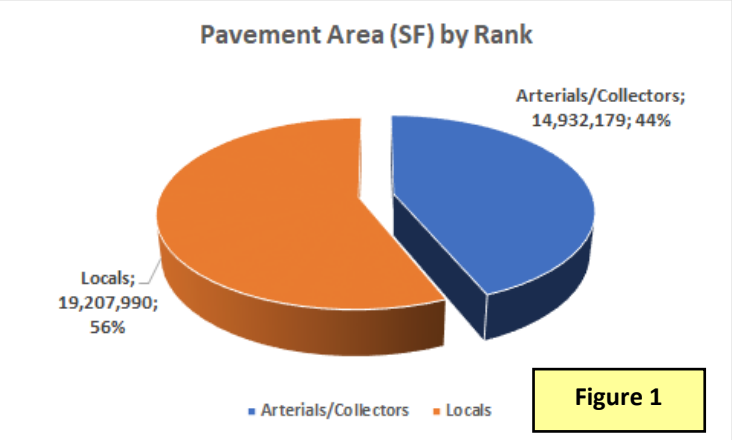


Figure 1

The City's pavement network is broken down into manageable groups that have similar characteristics, such as pavement rank, surface type and logical segmentation. Pavement segments are identified by their branch and section numbers. Pavement "branches" that have a common usage, such as Central Ave., defines a "branch" within MicroPAVER. Pavement "sections" are pavement segments within the defined branch that have consistent pavement rankings, construction/maintenance histories and use.

Representative inspection samples are then selected and visually surveyed to locate distress data. This data is used to calculate the pavement sections Pavement Condition Index (PCI) which includes distress type, extent of the distress and its severity.

PCI is a condition rating that ranges from 100 (a new pavement section or recently overlaid or reconstructed) to 0 for a section that has structurally failed and deteriorated dramatically. Weighted average PCI of a given area/zone = pavement section PCI * its own area divided by the total square footage of the given area/zone. Table 1 summarizes the section conditions found within the City of Compton pavement network by rank.

- **The weighted average PCI for the City of Compton Arterial/Collector network is 66.1**
- **The weighted average PCI for the City of Compton Local network is 56.6**

The weighted PCI value associated with the Arterial/Collector and Local routes shown through our survey analysis is timely in that it is showing that a large amount of preventative, slurry seal, and overlay work will be needed over the next several years to increase the level of condition (PCI) to a "preventative maintenance" state.

Rank	SF	Mi.	2024 PCI	2020 PCI	2017 PCI	2014 PCI
Arterials/Collectors	14,932,179	81.5	66.1	59.0	67.1	62.5
Locals	19,207,990	123.2	56.6	53.6	54.2	54.6
	34,140,169	**204.7**	**60.8**	**56.0**	**59.4**	**58.1**

Table 1 – Historical and Summary Findings for Compton PMP Network

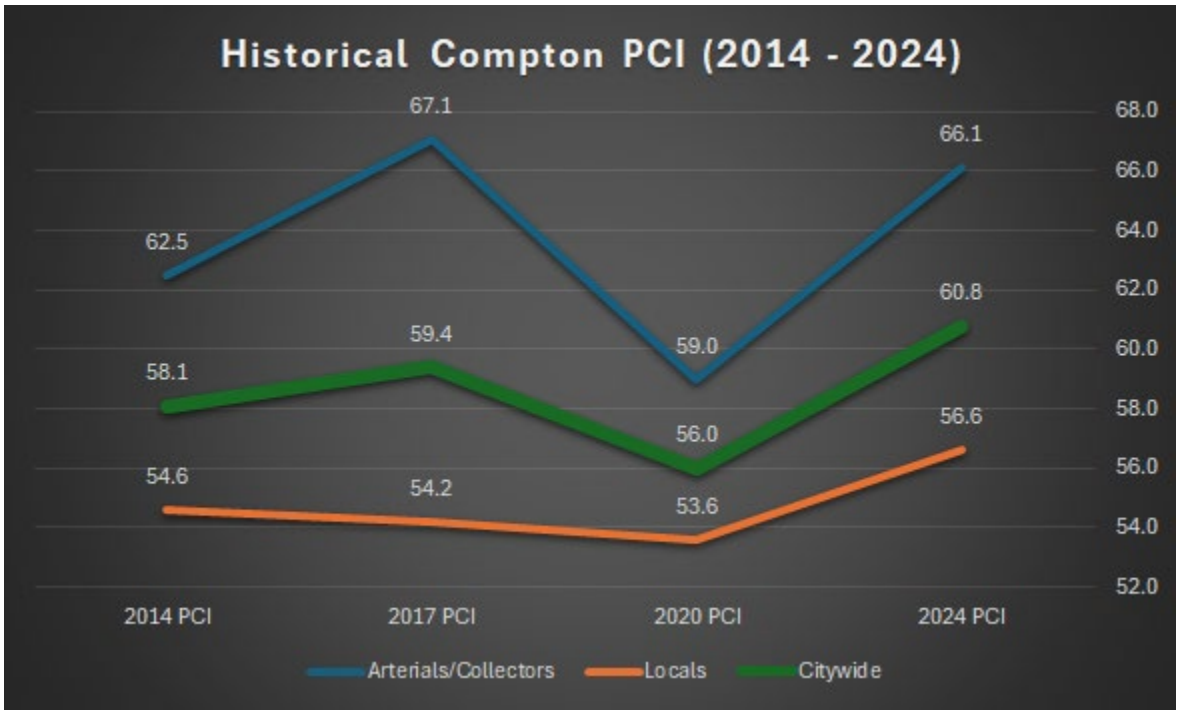


Figure 2 – Historical Compton PCI Findings (FY 2014-2024)

B. CURRENT CITYWIDE CONDITIONS (ARTERIALS/COLLECTORS AND LOCALS)

The overall condition of the City's pavement network is "Fair" with a weighted average PCI of 60.8 based on the surface area of each segment. A solid improvement from 2021; 56.0 to 60.8 (a 9% increase). The distribution of the City's overall pavement network is shown in Section III of this report (Condition Distribution).

Condition	PCI Range	Arterials	Locals	Total Mi.	% of Network
Very Good	(86-100)	25.1	21.7	46.8	22.9%
Good	(75-85)	10.6	13.8	24.4	11.9%
Fair	(60-74)	16.2	26.6	42.8	20.9%
Poor	(41-59)	10.8	24.1	34.9	17.1%
Very Poor	(0-40)	18.8	37.1	55.9	27.3%
		81.5	123.3	204.8	

Table 2 – Condition Distribution by Mileage for All Streets

For comparison, Bucknam performed pavement management studies for several other Los Angeles County agencies and have included their weighted PCI values (right).

Table 3

Neighboring City PCI's			
Alhambra	76.0	Duarte	77.3
South Gate	55.5	Monterey Park	65.7
Lynwood	71.6	Covina	73.4
South Pasadena	63.8	Commerce	65.5
El Segundo	74.4	Lomita	74.8
Sierra Madre	76.5	Gardena	81.2

As shown above, the majority of segments are evenly distributed through all five (5) condition categories (Very Good to Very Poor). For a network in "preventive" condition status you would typically see Very Good to Good section percentage totals at the 55% to 60% range; Compton's network currently shows 35% of its sections within these PCI ranges. These findings indicate that the proper funding of the network over the past several years has not been ample and needs to continuely be approved upon each of the next five years to sustain or improve the overall PCI; this will allow Public Works managers/staff to proactively establish preventative and rehabilitation schedules that will generate further high-value ROI for the City. At a minimum, to sustain this asset, continued amounts of overlay rehabilitation and slurry seal maintenance needs to be budgeted for and performed across all areas of the pavement network.

As shown in Table 2, over 44% of the City's entire network falls within the Poor to Very Poor condition categories based on the 2024 PCI findings, highlighting the need for continued funding of proactive overlay projects. More overlay rehabilitation activity will increase the City's overall weighted PCI while reducing deferred maintenance costs in future fiscal years. Overlay projects applied to appropriate, qualifying segments is necessary to sustain the City's network in a preventative condition status as described above. A network-wide preventative condition status is typically a network with a weighted average PCI over 75+.

Regarding the Local network, detailed inspection analysis shows that 23% (28.4 miles) of the Local pavement networks require slurry seal maintenance activity while 60% (74.1 miles) requires overlay rehabilitation or full reconstruction.

With the major amount of Local sections needing rehabilitation the City should proactively appropriate the necessary amount of annual overlay funding to improve the network to a higher condition level. The Local network will continue to be a major contributor to the high amount of deferred rehabilitation cost burdens unless appropriate pavement funding is applied.

In regard to the Arterial / Collector network, detailed inspection analysis shows that 27% (21.8 miles) of the pavement network requires slurry seal maintenance activity while 43% (35.1 miles) requires overlay rehabilitation or full reconstruction. Over the past three years the Arterial / Collector weighted PCI has improved by seven (7) PCI points. This is due to the proactive amount of arterial CIP overlay projects that have been applied to the network since 2021. With the overall arterial PCI in the mid-60's, continued planning and application of scheduled overlay projects needs to be implemented (FY 2024 thru 2027). This will continue to improve the overall conditions while freeing up additional funding for deferred Local overlay projects.

This Pavement Management Program update recommends pavement management strategies for each pavement segment based on the existing surface conditions. However, as large overlay and reconstruction projects are considered for funding, the City should make a final determination of the segment-specific pavement management approach based on subgrade R-values, structural design, and distress severities and extents.

PCI conditions reflect "surface" conditions; additional sub-surface data such as coring data, R-Values and ground penetrating radar (GPR) will provide the City to with a better approach to the maintenance that should be applied.

Our 2024 findings indicate that the PMP network has been proactively managed over the past several years. This is evident in the improvement of the citywide weighted PCI since 2021 and moderate amounts of deferred maintenance/rehabilitation projects. As the City strives to implement a stronger preventative state of M&R, cost efficient Arterial/Local rehabilitation and proactive use of available SB1/Gas Tax/Prop. C/Measure M/Measure R overlay funding should remain the focus.

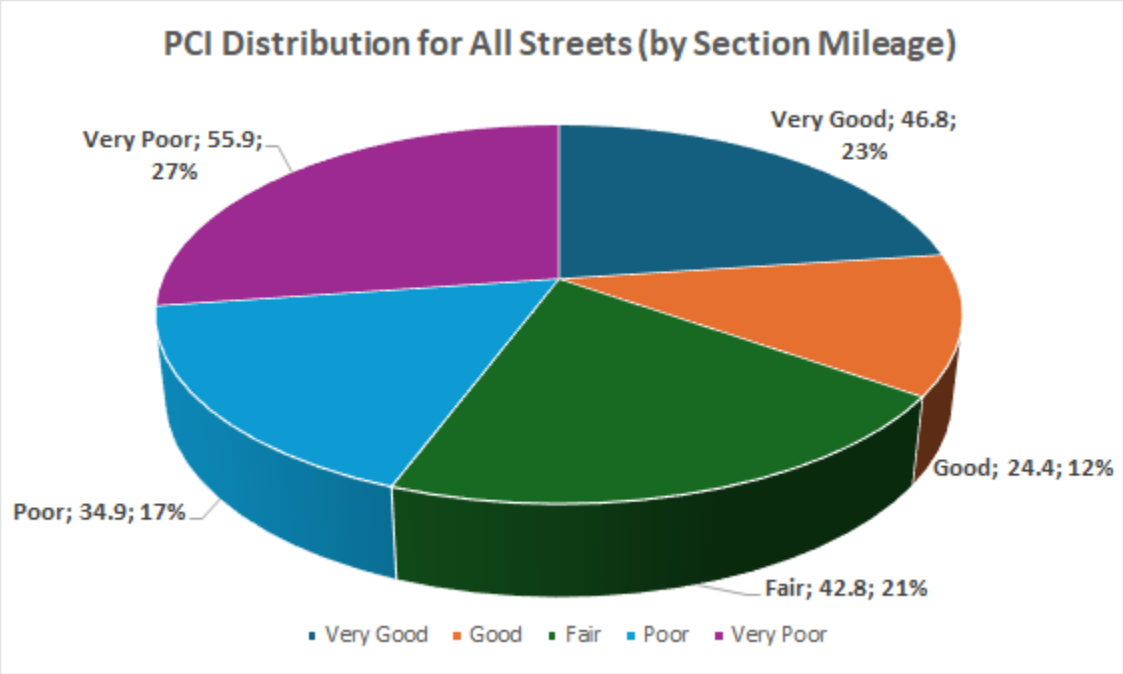


Figure 3 – PCI Condition Distribution for All Streets
Units shown above indicate total mileage (Table 2)

C. MAINTENANCE STRATEGY DEVELOPMENT

Based on the results of the condition survey and input from the City, pavement maintenance/rehabilitation strategies were developed. The City and Bucknam staff discussed and identified a distribution of benchmark pavement application unit cost that would be applied to the network over the next five years. The overriding goal of the PMP is to prevent the decrease in street conditions and not to allow an increase in the deferred maintenance costs over the five-year program. These application unit costs are essential to the economic modeling performed.

Bucknam identified the required level of funding to 1) Maintain the current PCI of 61 and 2) Increase the PCI to 65. With this approach, Bucknam has recommended a "minimal level of service" which creates a major dividing line in determining between preventive maintenance and major pavement rehabilitation.

Generally within pavement management programs, a PCI range between 55 to 70 determines the threshold of when preventive or major overlay rehabilitation is activated. Based on the City's weighted average PCI, condition distribution, maintenance practices, our team has identified a PCI of "65" as the minimum level of service. This means, in most cases, that pavement sections with a PCI greater than 65 will typically be recommended for preventive maintenance (i.e. slurry seal). This recommendation is indicated in Table 7, Section II.

Bucknam developed two multi-year Capital Improvement Programs for the City based on the pavement records, yearly capital expenditures, available funding and the most recent 2024 inspections. These recommendations and results are shown in Section II of this report.

As shown above in Figure 3, 35% of the City's streets are in Very Good to Good condition. These sections will be targeted for "preventive" maintenance within our Capital Improvement Program (CIP) recommendations. The reasoning in doing this is to extend the life cycles of those "good" pavement sections which accrues capital saving to aggressively rehabilitate those pavement sections that are below the "minimal level of service".

In order to achieve the most effective and optimum program for the City, certain strategies have been selected and/or analyzed. Below is a listing of the maintenance activities utilized in strategy development. Each activity is representative of the typical types of work that can be programmed as part of the long-term maintenance requirements of the City's street network.

General Repairs-Stop Gap (Localized Maintenance*); PCI range – 20 to 95

For this maintenance type, small localized surface treatments are utilized as "holding action" solutions (stop gaps) to delay the need for pavement structural strengthening. They typically include activities such as crack sealing, AC deep patching, AC skin patching, PCC slab replacement, grinding and leveling.

The City of Compton may consider an equipment such as the Asphalt Zipper to apply proactive localized surface patch repairs (R&R). In doing this, they prevent portions of pavement sections (high severity distress locations) from deteriorating at a continuously fast rate.

Microsurfacing - (Global Maintenance*); PCI range – 60 to 85

Microsurfacing is similar to slurry seal. It consists of the application of a mixture of water, asphalt emulsion, aggregate (very small crushed rock), and chemical additives to an existing asphalt concrete pavement surface. Polymer is commonly added to the asphalt emulsion to provide better mixture properties. The major difference between slurry seal and microsurfacing is in how they "break" or harden. Slurry relies on evaporation of the water in the asphalt emulsion. The asphalt emulsion used in microsurfacing contains chemical additives which allow it to break without relying on the sun or heat for evaporation to occur. Thus, microsurfacing is an application that hardens quicker than slurry seals and can be used when conditions would not allow slurry seal to be successfully placed. Streets that have a lot of shade and streets that have a lot of traffic are good candidates for microsurfacing (*source - LA County of Public Works*).

Slurry Seals (Global Maintenance*); PCI range – 60 to 85

Surface treatments applied to pavements with minimal surface distress to provide new wearing surfaces and extend pavement life. Generally consists of a mixture of conventional or latex-modified emulsified asphalt, well-graded fine aggregate, mineral filler and water placed over an existing AC surface; Slurry seal application life-cycles are averaging 4 to 5 years. Type II Slurry is recommended for Local streets.

Cape Seals (Global Maintenance*); PCI range – 40 to 65

This is an application of a single layer of asphalt binder to a road surface immediately followed by a single layer of cover aggregate (chips). The single layer chip seal is then followed with a slurry seal application; Conventional cape seal application life-cycles are averaging 6 to 7 years. For sections that have lower PCI's in this range, leveling courses should be considered. City is currently considering this application as an alternative cost-saving tool.

Overlays (Major Maintenance*); PCI range – 20 to 60

AC Overlay – Placement of a layer of hot-mixed asphalt concrete over the existing pavement surface (may include pavement fabric). Grinding (milling) is performed prior to the overlay to reduce the total height of asphalt and assure alignment with existing gutter lines. This also includes "dig-outs" and crack sealing prior to the application of an overlay. This treatment provides a new wearing surface and increased structural strength to the pavement section. A conventional overlay should be designed for a ten-year life.

Asphalt Rubber Hot-Mix Overlay - The ASTM definition is: Asphalt-Rubber is a blend of asphalt cement, reclaimed tire rubber and certain additives in which the rubber component is at least 15% by weight of the total blend and has reacted in the hot asphalt cement sufficiently to cause swelling of the rubber particles. Specifically, using crumb rubber modified binders in pavement application benefit local agencies in that cities find:

- Pavement resists cracking by being more flexible;
- Cost savings come from a longer life cycle (from Bucknam's experience typically 20% longer), decreased maintenance and the use of less material
- Improvement in skid resistance;
- Decreased noise; and
- It provides long-lasting color contrast for marking and striping
- Life cycles are averaging 8 to 12 years

Reconstruction (Major Maintenance*); PCI range – 0 to 20

Removal of the existing pavement section to a prescribed depth followed by the placement of a conventional flexible pavement section using a structural AC Hot Mix or AR Hot Mix or a full depth asphalt. Each classification of road has a typical design cross-section upon anticipation traffic loading. By performing a reconstruction the sections PCI resets at 100 and restarts the life-cycle deterioration of the section.

*Localized, Global and Major maintenance activities are default terms used within the MicroPAVER pavement software. Specific pavement repair applications are placed within each maintenance activity in order to develop multi-year maintenance forecast recommendations.

D. ANNUAL BUDGET PROJECTIONS

The budgeting process was approached with the following in mind; generate two unique work programs for the next five (5) years based upon actual road pavement conditions in order to:

1. Demonstrate how the City's current "Actual $10 Million annual budget" allocation for pavement maintenance/rehabilitation performs against the conditions found through our surveys

2. Recommend a proactive annual budget that, at a minimum, **maintains** the current weighted PCI on the network after five years (FY 2029)

Based on current and future pavement maintenance needs, two annual work programs have been prepared and summarized below. Table 4 demonstrates the pavement network performs over the next five years based upon the proposed allocated maintenance/rehabilitation funds. Table 5 demonstrates the necessary annual funding that is needed to maintain the current weighted PCI on the network (each scenario addresses arterial/collector and local streets; alleys were excluded).

Plan Year	PCI	R&R / Slurry	Overlay / Recon	Annual Revenue Allocation	Deferred Maint.
Current	**60.8**				$119,451,300
2024-25	63.8	$716,200	$9,254,400	$9,970,600	$114,591,300
2025-26	64.8	$1,202,000	$8,822,600	$10,024,600	$117,203,200
2026-27	64.9	$772,700	$9,231,300	$10,004,000	$119,981,300
2027-28	65.4	$442,800	$9,459,600	$9,902,400	$122,083,000
2028-29	65.3	$394,700	$9,688,700	$10,083,400	$123,633,800
		$3,528,400	$46,456,600	$49,985,000	

Table 4 – Citywide Projection Utilizing "Actual" Budget

Plan Year	PCI	R&R / Slurry	Overlay / Recon	Annual Revenue Allocation	Deferred Maint.
Current	**60.8**				$119,451,300
2024-25	62.4	$716,200	$6,571,400	$7,287,600	$117,892,800
2025-26	63.3	$1,202,000	$6,578,800	$7,780,800	$124,049,200
2026-27	63.1	$772,700	$6,667,700	$7,440,400	$131,526,800
2027-28	62.5	$442,800	$6,387,400	$6,830,200	$137,586,400
2028-29	61.5	$394,700	$6,344,200	$6,738,900	$144,152,700
		$3,528,400	$32,549,500	$36,077,900	

Table 5 – Five-Year Projection Demonstrating Required Budget to Maintain PCI of 61

Additional detail and breakdown of budget projections are demonstrated in Section IV of this report. All work program budgets generated are presented in terms of current 2024 dollars. The annual costs shown above only include materials and labor for the pavement. Curb and gutter, striping, project management, mobilization, construction management are not included. All repair activities were based on distresses observed at the time of the field survey. These are recommendations and are to be used as "the best case scenario" for improving the City of Compton street network.

E. QUALITY CONTROL EFFORTS

As indicated in our scope of work, Bucknam performed numerous quality control checks in the field during survey efforts as well as specific site investigations requested by the City.

Minor corrections were made to a handful of sections where we corrected the rank classification within MicroPAVER.

Through our internal quality control efforts, we believe we have found all the necessary publicly owned streets that needed to be reported on under this project.

F. FINDINGS AND RECOMMENDATIONS

Arterials/Collectors

The actual workload requirements identified indicate that the Arterial/Collector street network is currently in "Fair" condition (PCI = 66.1). To improve upon this condition, it is essential that preventive maintenance and overlay rehabilitation activities are funded at the levels identified in Table 4.

Our arterial/collector findings for conditional data and recommendations for revenue expenditures are shown below:

- The Arterial/Collector network has a weighted PCI of 66.1;
- Currently, 43% of the arterial/collector network (approx. 35.1 miles) require overlay/reconstruction rehabilitation; 27% (approx. 21.8 miles) require slurry seal maintenance;
- At a minimum, Arterial/Collector maintenance projects should focus on achieving and maintaining a PCI of 70+ within the next five years;
    - Develop a proactive fiscal and planned approach to identify arterial/collector overlay projects based on the deterioration modeling within MicroPAVER;
    - Maintain arterial/collector revenues at the levels shown within the Section IV Forecast Maintenance & Rehabilitation (FMR) Report for a minimum of five years to generate the results identified within this report;
- Reassess/re-evaluate the arterial/collector rehabilitation budget programs every two years to improve on CIP forecasts for 2024-25 and beyond to ensure the results shown in Table 4 and 5;
- Perform pavement inspections on the arterial/collector network every three years to build a solid planning model within MicroPAVER/MyRoads® to track PCI deterioration;
- Demonstrated budget shown in Table 4 is ample to improve the Arterial/Collector weighted PCI of 66.1 through five years, furthermore, the citywide deferred maintenance sustains at a level of $120 million after five years;
    - Unique budget scenarios created in MicroPAVER calculate annual deferred maintenance amounts based on the available/projected budget applied and section SF's that fall within preventative, slurry seal, overlay and reconstruction PCI ranges;
- Bucknam recommends that the City proactively budget overlay rehabilitation projects at the levels shown in Table 4 in order to improve upon the conditions found today as well as minimize the impact of a moderate increase deferred maintenance across the City.

Locals

The actual workload requirements identified indicate that the Local street network is currently in "Poor" condition (PCI = 56.6). To improve this condition, it is essential that preventive maintenance and overlay activities are funded at the levels identified in Table 4 to increase the network weighted average PCI value to the "Fair" category.

Our Local findings for conditional data and recommendations for revenue expenditures are shown below:

- The Local network has a weighted PCI of 56.6;
- Currently, 60% of the Local network (approx. 74.1 miles) require overlay/reconstruction rehabilitation; 23% (approx. 28.4 miles) require slurry seal maintenance;
- At a minimum, Local maintenance projects should focus on achieving and maintaining a weighted PCI above a level of 60+ within the next five years;
    - Current Local Forecast Maintenance & Rehabilitation (FMR) recommendations should be followed as shown in Section IV of this report;
    - Develop a proactive fiscal and planned approach to identify Local overlay projects based on the deterioration modeling within MicroPAVER;
- Increase Local revenues at the levels shown within the Section IV Forecasted Maintenance Report for a minimum of five years to generate the results identified within this report;
- Reassess/re-evaluate the Local rehabilitation budget programs every two years to improve on budget forecasts for 2024-25 and beyond to ensure the results shown in Table 4 or 5;
- Perform pavement inspections on the Local network every three years to build a solid planning model within MicroPAVER/MyRoads® to track PCI deterioration;
- Demonstrated budget shown in Table 4 is sufficient to improve the Local weighted PCI as it included necessary proactive overlay funding. Furthermore, the citywide deferred maintenance increases slightly from a level of $119.4 million to $123.6 million after five years;
    - Unique budget scenarios created in MicroPAVER calculate annual deferred maintenance amounts based on the available/projected budget applied and section SF's that fall within preventative, slurry seal, overlay and reconstruction PCI ranges;
- Bucknam recommends that the City allocate budget for overlay rehabilitations at the levels shown in Table 4 in order to improve upon the conditions found today as well as minimize the impact of a high increase of deferred maintenance across the City.

SECTION II
PAVEMENT MANAGEMENT SYSTEM

Bucknam performed the following services in accordance with the scope of services that was contracted with the City of Compton. As a quick overview, the following tasks were performed to complete the work over the past several months:

2024 Pavement Management Work Efforts:

Task 1: Project Kickoff-Data Management
Task 2: Update of Maintenance Activities
Task 3: Pavement Condition Survey (approx. 204.8 miles)
Task 4: Budgetary Analysis and Capital Improvement Reports
Task 5: Executive Summary and Final CIP Reports
Task 6: Mapping of the Pavement Network

A. PAVEMENT MANAGEMENT PROGRAM UPDATE 2023-24

As a part of the 2024 update of the pavement management system, a major element of work was to complete a comprehensive assessment of the existing street network and PMP database within the City. This included assessing the City's existing 2021 MicroPAVER database, GIS, street naming conventions and work history information. From there, Bucknam worked with the City to confirm public and private street listings which verified accuracy for CIP reporting. All data was then published within the City's updated MicroPAVER database.

Work history information was provided by the City in the form of completed bid documents, institutional knowledge, and previous dataset and Excel documents. This information was entered into the proper pavement segments that match the limits of those projects. From there, CIP pavement recommendations were performed (discussed and demonstrated below) where the pavement maintenance information the City provided (PMP material practices, unit costs, and capital budgets) were used to generate recommendations through the MicroPAVER system.

Table 6 demonstrates PCI ranges defaulted within MicroPAVER. Once a pavement inspection is complete, a PCI is calculated for each pavement section. Each PCI calculated falls within a defined PCI range category (Very Good, Very Poor, etc.). Furthermore, a weighted PCI was calculated for the each functional class within the network (arterials/collectors and locals).

The PCI is a condition rating that ranges from 100 (a new pavement section or recently overlaid or reconstructed) to 0 for a section that has structurally failed and deteriorated dramatically. Weighted average PCI of a given area/zone = pavement section PCI multiplied by its own area divided by the total square footage of the given area/zone. This information can also be represented through MicroPAVER to show how much square footage or percentage of area falls within a PCI range category.

PCI Range	Condition
86-100	Very Good
75-85	Good
60-74	*Fair (2024 Compron = 60.8)*
41-59	Poor
0-40	Very Poor

Table 6 - PCI Range

These condition ranges are defined by the Army Corps of Engineers and defaulted within the MicroPAVER software. The summary of all roads condition data and their representative PCI's can be seen in the Pavement Condition Report in Section III.

B. MAINTENANCE STRATEGY ASSIGNMENTS

Once the appropriate activities from the above listings were selected by the City, a Maintenance Strategy Table was defined within the system that allocated the appropriate actions to the specific repair needs of the street. In defining the maintenance strategy list, emphasis was placed on defining pavement condition thresholds and using the PCI for the specific maintenance activities within these categories.

Maintenance Strategy Assignment Table

All Streets		
PCI Range	**Description**	**Unit Cost**
20-100 Varies by Activity	Preventative, Stop Gap, Patching	Varies by Activity
65-85	Type II Slurry (Locals)	$0.63/SF
65-85	Type II Slurry (Arterials)	$0.88/SF
Minimal Level of Service (65)		
40-65	Cape Seal (Locals)	$2.25/SF
20-65	2" Grind / Overlay (Local)	$3.86/SF
20-65	2.5" ARHM Overlay (Arterial)	$5.63/SF
0-20	AC Remove & Replace (Locals)	$14.87/SF
0-20	AC Remove & Replace (Arterials)	$14.87/SF
0-20	PCC Reconstruction	$28.12/SF
	25% Contingency included within All Unit Costs	

Table 7 – Maintenance Strategy Assignments

The Strategy Assignments List, shown in Table 7, was developed to identify the most critical segments in each of the work programs (Arterial/Collector and Local). Segment priorities were established by determining the range of PCI's requiring first attention based on the relative value of each segment's PCI, thus maximizing the annual maintenance budget.

Also, distress quantity, area extent, type and severity were critical elements in the decision process for recommending maintenance.

The assignment table is used as a guide within MicroPAVER to recommend maintenance, however, further assessment by City staff and/or outside parties can override maintenance recommendations. This can be done by reviewing and assessing distress extents and their weighted percentages.

Once the strategy assignments were set within the system, budgets and work assignments were generated for each work program on an annual basis. Using pavement deterioration curves for each type of pavement surface and class of road, both current year and future years work requirements for each pavement segment within the City were determined. In forecasting the maintenance requirements in future years, the current PCI value is reduced annually for each pavement segment based on the MicroPAVER deterioration curves within the City's database.

Likewise, maintenance activities performed in a given year increase the PCI value as they are applied to the segment. The overall program is dynamic in that each strategy consists of a cyclic series of actions that simulates the pavement anticipated life cycle.

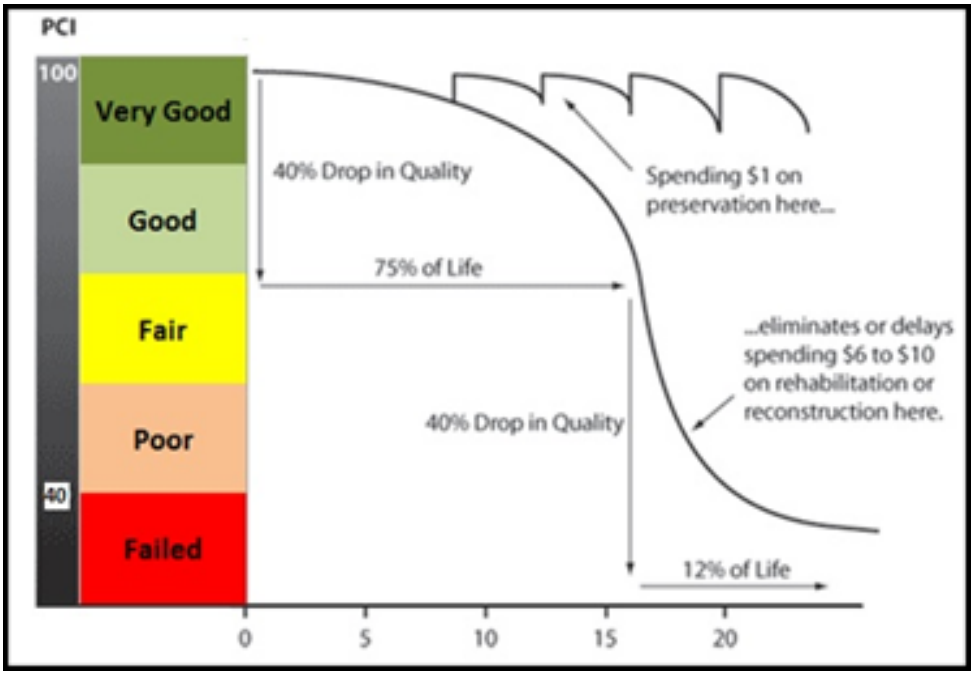


Figure 4 – Sample Pavement Life Cycle

C. MULTI-YEAR ANNUAL WORK PROGRAM PROJECTIONS

The goal of these projections is to assist City policy makers in utilizing the recommendations of the MicroPAVER system. By using the City of Compton's current budgets and maintenance practices the system will develop "section unique" improvements and strategies. Each segment will be tied to a specific fiscal year. As shown in the following pages, we have assessed the budgets that have been projected to meet the maintenance and rehabilitations needed to maximize the City's return on investment. The budget forecasting goal for the City network focused on:

- Establishing a proactive multi-year Maintenance & Rehabilitation Program;
- Developing a preventive maintenance program; and
- Selecting the most cost-effective repairs based on City strategies

ACTUAL BUDGET – The Actual budget model was generated for the City to demonstrate how the City's 5-Year PMP funding allocation ($10 Million / yr) performs against the current citywide conditions.

- City's projected actual budget includes:
- Projects are funded through SB1 & Proposition C, Measure R, Measure M, Gas Tax and General Funds

MAINTAIN BUDGET – A Maintain budget was generated for the City to demonstrate the necessary funding that is required to maintain the current weighted PCI level of 61 through a five year model.

***All multi-year budget projections include a 4% inflation rate for the term of the budget forecast**.*

ARTERIAL/COLLECTOR & LOCAL
FIVE-YEAR BUDGET PROJECTIONS

ACTUAL – The first key step in developing a proactive PMP is to model the City's existing conditions against the "actual" annual budget. In doing this, PCI performance, deferred maintenance and pavement application uses are able to benchmarked and demonstrated in a positive or negative result. The City's existing 5-Yr PMP budget was used for this model; the City provided Bucknam with current 2024 unit costs for pavement maintenance applications. The resulting PCI conditions and maintenance distributions are shown below. Bucknam worked with the City's Public Works staff to review previous methodologies and schedules applied by the City. With this scenario, our initial goal is to provide the City with a budgetary outlook and conditional impact report that can be used to eventually create a solid, preventative maintenance program.

ACTUAL BUDGET PROGRAM (FIVE YEAR MODEL)

Actual Budget Program incorporates pavement sections that have a functional class of Arterial (A/B), Collector (C) and Locals (E).

Plan Year	PCI	R&R / Slurry	Overlay / Recon	Annual Revenue Allocation	Deferred Maint.
Current	**60.8**				$119,451,300
2024-25	63.8	$716,200	$9,254,400	$9,970,600	$114,591,300
2025-26	64.8	$1,202,000	$8,822,600	$10,024,600	$117,203,200
2026-27	64.9	$772,700	$9,231,300	$10,004,000	$119,981,300
2027-28	65.4	$442,800	$9,459,600	$9,902,400	$122,083,000
2028-29	65.3	$394,700	$9,688,700	$10,083,400	$123,633,800
		$3,528,400	$46,456,600	$49,985,000	

Table 8 – Citywide Projection Utilizing "Actual" Budget ($10 mil/yr)

By modeling the existing pavement conditions against the City's available funding, we have found that two major positive results occur over the five year CIP. (See Figure 5 on the following page). First, the weighted PCI for the entire network increases from a level of 60.8 to a level of 65.3 over the five year CIP which meets one of our recommended goals (minimum level of service = 65). The five year model above includes pavement applications covering:

- 5.8 million SF of Arterials/Collectors, or 30.1 miles;
- 5.7 million SF of Locals, or 39.0 miles

Secondly, the resulting deferred maintenance backlog shows that it sustains at a level of $120 million after the five years program which indicates that an annual pavement budgets are ample enough to hold the deferred maintenance level (or backlog of maintenance) on the network. The backlog that has been identified above consists of slurry/cape seals, overlays and reconstruction. Combined with the positive results found with the weighted PCI we recommended that this 5-yr maintenance schedule be followed.

DEFERRED MAINTENANCE

Delaying repairs on streets where pavement conditions indicate a need creates deferred maintenance. Deferred maintenance includes pavement maintenance, rehabilitation and reconstruction projects that are needed across the entire network, but cannot be performed due to the lack of available funding. These delayed projects are then pushed to the next budget cycle incurring higher unit costs/SF. The actual repairs that are being deferred are often referred to as a "backlog".

As maintenance is deferred, the opportunity to apply life extending preventive pavement applications is lost and the ultimate cost of rehabilitation multiples.

As shown, this projection model does meet the initial goal of maintaining or increasing the City's pavement network PCI. With today's economic issues at the Federal, State and local levels; the City should continuously monitor the management of overlay deferred maintenance (PMP studies every two to three years). The potential delay in projects and the resulting build-up of more overlay work in the five-year time frame is not a debt that City will want to accept.

Through Bucknam's analysis of the previous pavement database, work history dates and our experience with AC Overlay deterioration rates, it is important to point out that pavement sections that were overlaid in fiscal year 2010 will need proper overlay maintenance approximately around fiscal year 2024-25 and beyond.

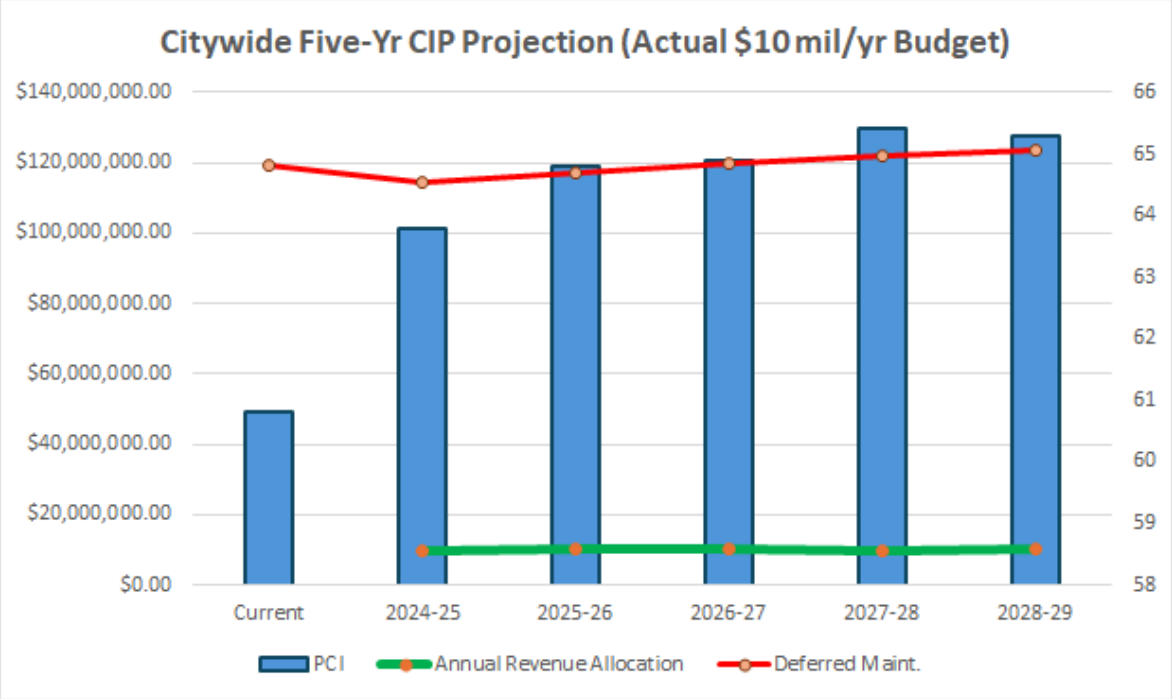


Figure 5 – Resulting Network PCI and Budget Expenditures (Actual Budget)

The resulting "increase of the weighted PCI" for the entire network demonstrates how applying proper funds to the network is preventing the City's pavement from deteriorating at a rate that is not conducive to a PMP success. Based on available funding or programmed funding identified by the City's long-term CIP, there may be an opportunity to proactively schedule or appropriate funds to areas of the City that have been annually deferred due to high maintenance costs.

Additionally, the City should continue to implement local, stop gap maintenance (i.e. deep patching, crack sealing, etc.) prior to any major slurry / cape seal or overlay maintenance. By performing stop gap measures to individual pavement sections the overall performance of the sections condition will increase and sustain itself longer than if no preventative maintenance was performed.

As mentioned above, a local slurry/overlay maintenance "zone/area" strategy should be considered for several reasons. With the City applying a maintenance area methodology to the local network, four beneficial impacts occur:

1) Planned / Maintenance areas are addressed every seven years which creates a dedicated project schedule for City staff and constituent inquiries;
2) Deferred overlay maintenance can be addressed in a more effective manner due to accrued revenues
3) A preventative maintenance strategy is more cost-effective in a long-term PMP rather than implementing a maintenance approach that addresses only the "worst-first" streets.
4) All maintenance alternatives are available due to the increased funding and focused maintenance within one zone per year.

On the negative side, if low weighted PCI values occur within a given zone, all streets within that zone may not be able to be addressed with maintenance when that zone is scheduled for maintenance. The deferred maintenance will have to be scheduled for maintenance in future years or simply will have to wait until the zone cycle repeats.

The Local maintenance model that has been developed under the Actual budget can be used as a benchmark to monitor the City's annual budget allocations as the network continues to mature and age; the proper amount of funding for slurry seal and overlay maintenance needs to be the City's highest priority.

MAINTAIN PCI PROGRAM (FIVE YEAR MODEL)

With the City striving to show proactive maintenance across all City pavements, a budget program was generated to show the greatest return on investment through the application of slurry seal, mill & cap, and alternative overlay maintenance. Our goal under this model is to maintain the current 2024 weighted PCI of 61 through a five-year program. This model will demonstrate the necessary funding to achieve this goal.

Again, we used the "Actual" 5-yr PMP model (shown above) as a cornerstone for our modeling within the "maintain" program. Combining the previous reporting model with a realistic and achievable annual budget, we found positive results.

The Recommended Program incorporates pavement sections that have a functional class of Arterial (A/B), Collector (C) and Local (E).

Plan Year	PCI	R&R / Slurry	Overlay / Recon	Annual Revenue Allocation	Deferred Maint.
Current	**60.8**				$119,451,300
2024-25	62.4	$716,200	$6,571,400	$7,287,600	$117,892,800
2025-26	63.3	$1,202,000	$6,578,800	$7,780,800	$124,049,200
2026-27	63.1	$772,700	$6,667,700	$7,440,400	$131,526,800
2027-28	62.5	$442,800	$6,387,400	$6,830,200	$137,586,400
2028-29	61.5	$394,700	$6,344,200	$6,738,900	$144,152,700
		$3,528,400	$32,549,500	$36,077,900	

Table 9– Five-Year Projection Demonstrating Required Budget to Maintain PCI of 61

Referring to Table 9, it is noted that the weighted PCI basically remains consist through the five-year projection (60.8 to 61.5). However, the annual deferred maintenance total increases from $119.5 million to $144.2 million at the end of the five-years if the City utilizes an annual budget average of $7,215,600/yr for slurry, overlay, and reconstruction maintenance. We found that annual average square footage breakdowns of maintenance areas were consistent and well balanced.

Under this model, we recommend that a stronger focus be placed on the Local network improvements due to the fact that its network has approximately 29% more square footage compared to the arterial/collector network and has a significantly lower weighted PCI than the arterials/collectors.

We still recommend minor maintenance to the arterial/collector network, i.e. localized patching, slurry seal and the use of Measure R, Proposition A/C & Gas Tax funds. But again, with the Local network showing a higher degree of negative results, a new focus for zoned area maintenance and proactive overlays should be implemented.

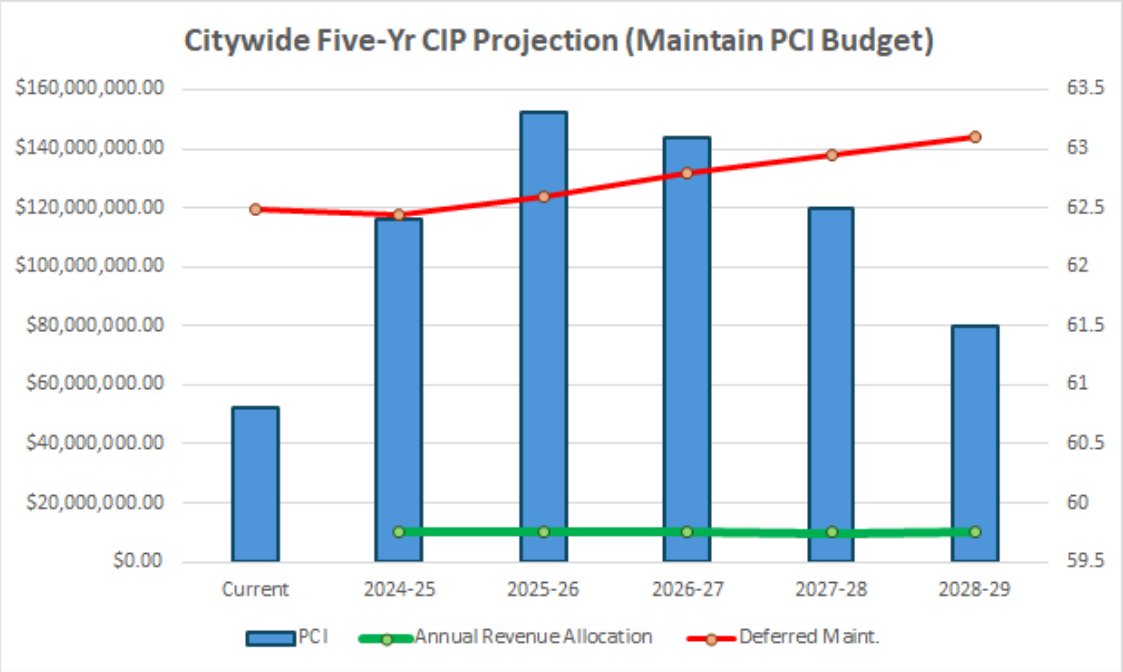


Figure 6 – Resulting Network PCI and Budget Expenditures (Maintain Budget)

Additionally, it is recommended that the City continue to monitor the application of Slurry / Cape Seal or Grind & Overlay as an asphalt application for the specific local sections. Specific sections are now qualifying for maintenance that warrants a stronger application rather than a typical slurry seal.

With a five year cycle in motion, it is essential to address local sections that have PCI's less than 65 with the proper rehabilitation since crews will not be back within that area for five to six years.

PAVEMENT MANAGEMENT PROGRAM REPORTS

In addition to the annual budget scenario, this report contains a comprehensive and complementary assemblage of pavement management reports ranging from summary reports to annual maintenance and rehabilitation schedules (Forecast Maintenance & Rehabilitation (FMR) Report, Section IV). Collectively as well as individually, the reports represent reasonable projections of pavement maintenance needs and performance based on visual condition assessments, unit cost estimates, and pavement deterioration models.

It is important to note that pavement segment dimensions and surface area recorded during 1999-2021, and 2024 inspections, along with the action and repair costs, as presented within the reports are accurate within tolerable limits. This is noteworthy due to the "implied" accuracy of reporting length and width to the nearest foot, surface area to the nearest square foot, and action and repair unit costs and project estimates to the nearest penny and dollar, respectively.

NEXT STEPS

As with any infrastructure management software program, time investments need to be made by key Public Works staff to maintain the integrity of the data as well as the accuracy. Bucknam can perform training sessions in the use of the MicroPAVER tools and demonstrate how to generate standard common-sense reports to assist City staff in developing yearly budgets, project level analysis, and CIP projections. This will be key to future management of the pavement program and reporting. City personnel need to maintain their commitment to the preventive maintenance system, while working toward reducing the City's present deferred rehabilitation projects.

In order to ensure that report outputs are accurate and credible, it is essential that the integrity of all data files be maintained. This will require performing all necessary updates when changes are made to scheduling scenarios, unit cost information, historical data, etc. In addition, the entire pavement network will have to be re-inventoried at regular intervals. This typically includes surveying arterial and collectors every two years and locals every three.

This will not only allow work to be scheduled based on the most current condition data available, but will provide City personnel with a means to monitor actual rates of pavement deterioration so appropriate modifications can be made to the system curves. To be compliant with the METRO requirements, the City must generate a triennial Pavement Management report indicating condition ratings, inspection dates and forecasted maintenance/rehabilitation recommendations. Bucknam will be supporting the City with staff level support to assist in the continuous updates with the MicroPAVER/MyRoads® system. This will include work history updates, generating reports from the system, unit cost updates, and future inspections.

D. CONDITION DISTRIBUTION REPORT

This report depicts the distribution of the pavement condition throughout the street network by area.

The condition scheme ranges from "Very Good" to "Very Poor"; with a "Very Good" condition corresponding to a pavement at the beginning of its life cycle, and a "Very Poor" condition representing a badly deteriorated pavement with virtually no remaining life. The table below shows the general description for each pavement condition:

Condition Description – PCI Range - Description

Condition Description	PCI Range	Description
Very Good	86-100	Minor to low distress, no significant distress; Low severity distresses with expection of utility patches in good condition or slight hairline cracks; minor weathering found
Good	75-85	Slight to moderately weathered, low to moderate distress severities, utility patching commonly found; moderate distress extents
Fair	60-74	Severly weathered or moderate levels of distress, generally limited to utility patching and climate related distress
Poor	41-59	Moderate to high distresses including load related types such as alligator cracking, greater distress extents
Very Poor	0-40	Severly distresses, large quanities of distortion or alligator cracking; Failure of the pavement, distress has surpassed tolerable rehabilitation limits

2024 City of Compton weighted average PCI is 60.8 (Fair).

E. CALCULATION OF PCI

In order to calculate a Pavement Condition Index (PCI) value within MicroPAVER, specific street section data needs to be inputted into MicroPAVER to define the survey limits, asphalt types, pavement age and metrics. Pavement "sections" are pavement segments within the defined branch that have consistent pavement street classifications, construction/maintenance histories and use. Representative inspection samples are then selected and visually surveyed to locate distress data. This data is used to calculate the pavement sections Pavement Condition Index (PCI) which includes distress type, extent of the distress and its severity.

The PCI is a condition rating that ranges from 100 (pavement section that is in perfect condition) to 0 for a section that has structurally failed and deteriorated dramatically. The PCI is calculated from three major data entries from our inspectors:

1. Distress Type (one of 20 AC or 19 PCC types); these include alligator cracking, bleeding, block cracking, corrugations, depressions, long/trans cracking, patch/utility cut, potholes, rutting, weathering, raveling, etc.
2. Distress Quantity (the square footage, length or count of a specific distress)
3. Distress Severity (the level of severity determined for each distress found; low, medium or high)

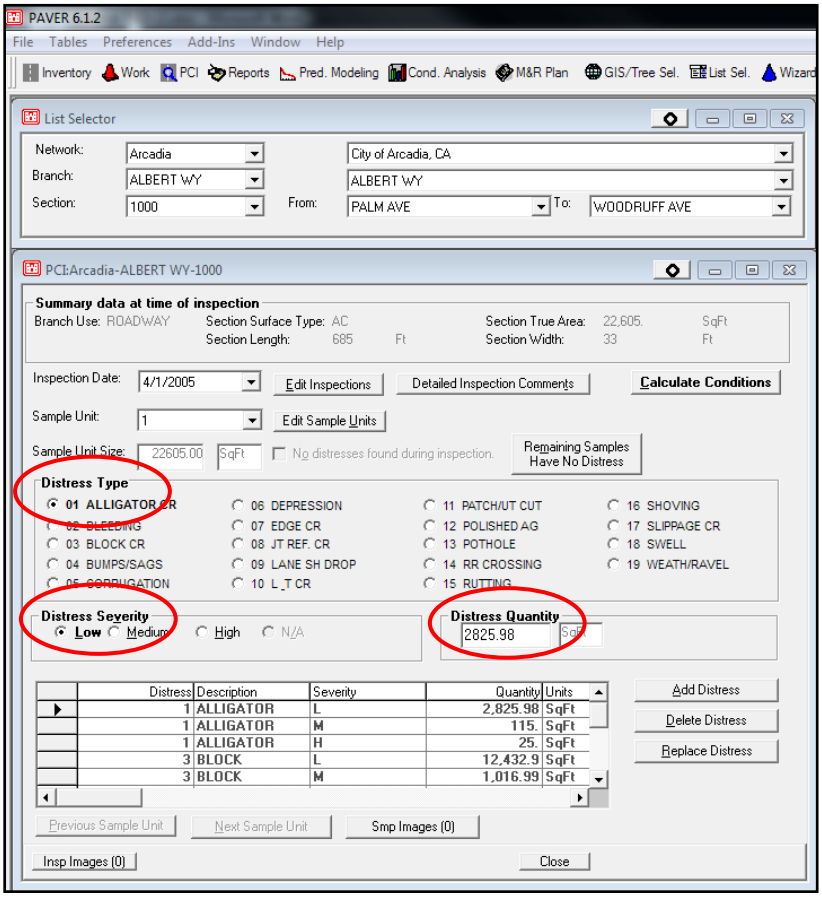


Figure 7 – PCI Calculation Worksheet

F. COMPTON MYROADS® PMP WEB-PORTAL

Bucknam's MyRoads® is a great match for the City of Compton's PMP today and the future. **MyRoads® brings your PMP data to life within a dynamic dashboard!** Bucknam now provides all our PMP clients with a unique and agency driven "MyRoads®" web-portal that provides instantaneous access to your pavement management database. This "dashboard" allows users to toggle through individual sections via GIS mapping selections, zone queries, rank selection, PCI ranges, etc. to review all section metrics, latest/previous inspections, work histories generate filtered PCI reports and identify potential maintenance / rehabilitation costs based upon your unique needs.

Bucknam has shown below the Compton MyRoads® account actively working! This tool will be accessed by City staff simply through a Username/Password methodology. As changes are made to the Compton PMP database the MyRoads® dataset is changed to reflect work history edits, PCI inspections and section changes.

In summary, MyRoads® allows the user to perform the following dynamic functions:

- Query specific pavement segment(s) to view current/historic PCI, work history inspection;
- Filter for pavement sections within a defined zone, PCI range and/or functional class;
- Select a pavement section or grouping of section through the on-board GIS tool;
- Enter slurry, overlay & reconstruction unit costs to determine preliminary cost of maintenance and resulting citywide PCI
    - Display critical street / sidewalk / ROW assets along pavement section(s) that are critical to Engineering Bid development and solicitation (ADA ramps, utilities, manholes, trees, etc.
- Displays all final GIS project maps (PCI, work history, 5-yr forecasted maintenance, etc.)
- Bucknam will train Compton's staff on the simple use of the MyRoads® dashboard.

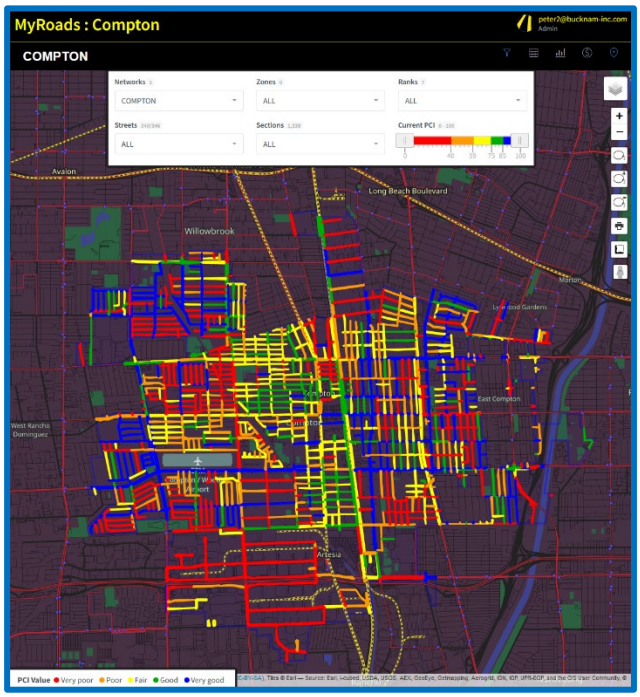


Figure 8 – Compton MyRoads® PMP Web-Portal

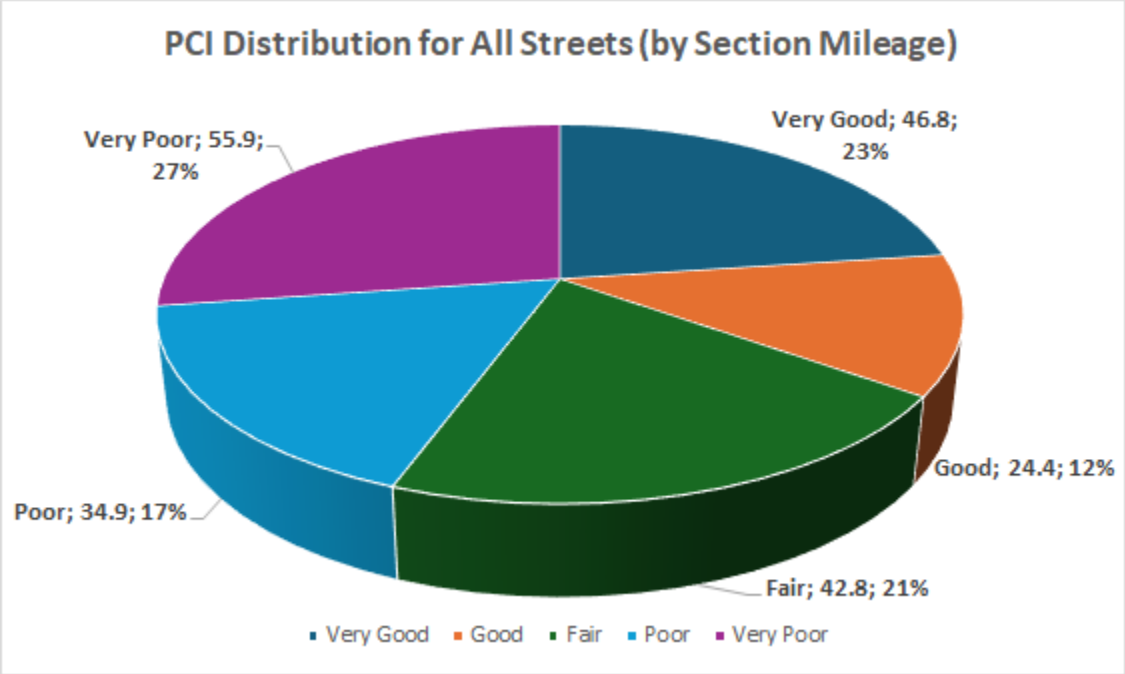


Figure 9 – Arterial / Collector Condition Distribution

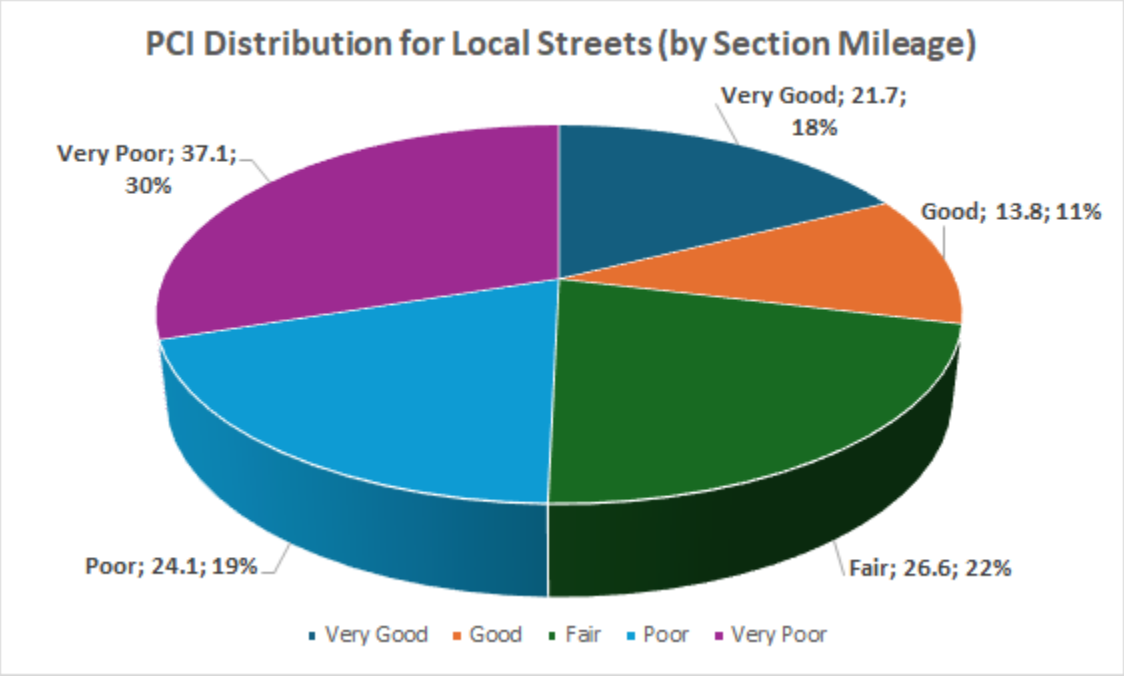


Figure 10 – Local Condition Distribution

G. SAMPLE DISTRESS PHOTOS – RECOMMENDED TREATMENT (FIGURE 11)

Bucknam Infrastructure Group

1. Alligator Cracking



Cracks that form a chicken wire or alligator scale like pattern.

Low Severity: Thin parallel longitudinal cracks that may come together at certain points, but full alligator pattern is not present yet.
Medium Severity: Further development of cracks into alligator pattern. Cracks are starting to spall.
High Severity: Alligator pattern is heavily developed, and cracks are spalled to the point where individual pieces may become separated.

Typical Recommendation: Low severity, R&R – Patching, crack sealing; high severity R&R-overlay

2. Bleeding



Bleeding occurs when incorrectly mixed asphalt is applied and in hot weather the asphalt or tar rises to the surface.

Severity is determined by the amount of asphalt/tar present.

Typical Recommendation: Low severity, apply coarse sand; high severity, grind or heat planer excess, resurfacing may be necessary

3. Block Cracking



Longitudinal and transverse cracks that intersect to form smaller than 10x10 ft blocks. Creates uniform blocks with straight edges.

Low Severity: Cracking is less than 3/8 inches.
Medium Severity: Cracking between 3/8 and 3 inches.
High Severity: Cracking is over 3 inches.

Typical Recommendation: Low severity, crack sealing; high severity, R&R-overlay

4. Bumps and Sags



Small, localized, and linear upward or downward displacements of pavement, which can be caused by a variety of factors.

Severity is determined by the extent to which ride quality is diminished.

Typical Recommendation: R&R - Patching

5. Corrugation



Closely spaced Bumps and or Sags that form a washboard effect in the pavement.

Severity is determined by the extent to which ride quality is diminished.

Typical Recommendation: Low severity, R&R – Patching; high severity, R&R-overlay

6. Depression



Localized area of pavement with a lower elevation than the surrounding pavement.

Low Severity: depth of ½ to 1 inch.
Medium Severity: depth of 1 to 2 Inches.
High Severity: depth greater than 2 inches.

Typical Recommendation: R&R - Patching

7. Edge Cracking



Cracks that are parallel to the edge of the pavement that may cause a break up of pavement.

Low Severity: Low or Medium cracking with no breakup.
Medium Severity: Medium cracking with some breakup.
High Severity: Considerable breakup of pavement.

Typical Recommendation: R&R - Patching

8. Joint Reflective Cracking



Cracking that is reflected through AC pavement when it is overlaid on top of PCC pavement.

Low Severity: Cracking is less than 3/8 inches.
Medium Severity: Cracking between 3/8 and 3 inches.
High Severity: Cracking is over 3 inches.

Typical Recommendation: R&R - Overlay

9. Lane / Shoulder Drop-off




Elevation change between pavement and shoulder.

Low Severity: Difference in elevation is between 1 and 2 inches.
Medium Severity: Difference in elevation is between 2 and 4 inches.
High Severity: Difference in elevation is over 4 inches.

Typical Recommendation: R&R – Patching or edge grinding

10. Linear & Transverse Cracking

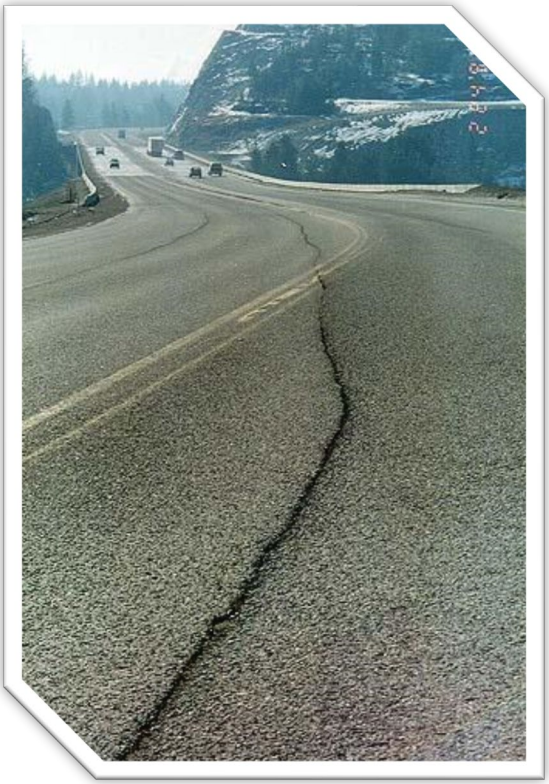

Cracks that are generally either parallel or perpendicular to traffic.

Low Severity: Cracking is less than 3/8 inches.
Medium Severity: Cracking is between 3/8 and 3 inches.
High Severity: Cracking is over 3 inches.

Typical Recommendation: Low severity, crack sealing; high severity, R&R - Overlay

11. Patching



Area of pavement that has been replaced.

Severity is determined by the quality of the patch and the extent to which ride quality is diminished.

Typical Recommendation: R&R – structural / non-structural overlay

12. Polished Aggregate



Distress where traffic smooths the pavement surface so friction is diminished and cars can slide.

There are no Severity Levels for this distress.

13. Pothole



Severity Measured using the following Matrix.

	Average Diameter (in.) (mm)		
Maximum Depth Of Pothole (in.) (mm)	4 to 8 in. (100 to 200 mm)	8 to 18 in. (200 to 460 mm)	18 to 30 in. (460 to 760 mm)
1/2 to ≤ 1 in. (13 to 25 mm)	L	L	M
> 1 to ≤ 2 in. (25 to 50 mm)	L	M	H
> 2 in. (50 mm)	M	M	H

Typical Recommendation: low severity Pothole fill or R&R – Patching, high severity should be R&R-Overlay

14. RR Crossing



Pavement distresses caused by railroad crossings.

Severity is determined by the extent to which ride quality is diminished.

Typical Recommendation: R&R - Patching

15. Rutting



Linear depressions along wheel paths caused by traffic.

Low Severity: Depth is ¼ to ½ inches.
Medium Severity: Depth is ½ to 1 inch.
High Severity: is greater than 1 inch.

Typical Recommendation: Pavement with deeper ruts should be leveled and overlaid

16. Shoving



Displacement of pavement creating a "wave" over a more solid surface.

Severity is determined by the extent to which ride quality is diminished.

Typical Recommendation: R&R - Patching

17. Slippage Cracking



Half-moon shaped cracks where wheels cause pavement to slide.

Low Severity: Average crack width is less than 3/8 inch.
Medium Severity: Crack width is between 3/8 and 3/2 inches.
High Severity: Crack width is greater than 3/2 inches.

Typical Recommendation: R&R - Patching

18. Swell



Upward Bulges creating “wave-like” patterns.

Severity is determined by the extent to which ride quality is diminished.

Typical Recommendation: Low severity, R&R – Patching; high severity, R&R-overlay

19. Weathering



The wearing away of the asphalt binder.

Low Severity: Aggregate is starting to be exposed.
Medium Severity: Aggregate is exposed up to ¼ of its width.
High Severity: Aggregate is exposed to greater than ¼ of its width.

Typical Recommendation: naturally occurring, slurry seal

20. Raveling



The further weathering of asphalt so that coarse aggregate is separating out of pavement.

Medium Severity: Considerable loss of aggregate.

High Severity: Almost complete removal of coarse aggregate.

Typical Recommendation: Low severity, R&R – Patching; high severity, R&R-overlay

PORTLAND CEMENT CONCRETE (PCC)

1. Blowup



Buckling at cracks or joints where there is not enough room for slab expansion.

Severity is determined by the extent to which ride quality is diminished.

2. Corner Break



Crack close to corner of slab that creates a corner piece.

Low Severity: Crack is less than ½ inches wide.
Medium Severity: Crack is between ½ and 2 inches wide.
High Severity: Crack is wider than 2 inches.

3. Divided Slab



Slab that is broken up into four or more pieces by cracks.

Severity is determined by the following matrix.

Severity Of Majority Of Cracks	Number Of Pieces In Cracked Slab		
	4 to 5	6 to 8	More than 8
L	L	L	M
M	L	M	H
H	M	H	H

4. Durability Cracking



Pattern of cracks parallel to joints caused by freeze-thaw expansion of large aggregate.

Low Severity: Durability cracking covers less than 15 percent of slab.
Medium Severity: Durability cracking covers more than 15 percent of the slab.
High Severity: Durability cracking covers more than 15 percent of slab and most pieces have come out.

5. Faulting



Elevation Difference between slabs.

Low Severity: Elevation difference is between 1/8 and 3/8 inch.
Medium Severity: Elevation is between 3/8 and ¾ inch.
High Severity: Elevation is greater than ¾ inch.

6. Joint Seal Damage



Damage to sealant between joints that allows soil, rock, or water infiltration.

Low Severity: Joint sealant has only minor damage.
Medium Severity: Joint sealant is in fair condition. Water can infiltrate and vegetation may be present.
High Severity: Joint sealant is in poor condition. It may be missing and rocks may be present.

7. Lane / Shoulder Drop-Off



The Elevation difference between pavement and shoulder.

Low Severity: Elevation difference is between 1 and 2 inches.
Medium Severity: Elevation difference is between 2 and 4 inches.
High Severity: Elevation difference is greater than 4 inches.

8. Linear Cracking



Cracks that divide slab into two or three pieces.

Low Severity: Crack is less than ½ inch wide.
Medium Severity: Crack is between ½ and 2 inches wide.
High Severity: Crack is wider than 2 inches.

9. Large Patch



Patch that is larger than 5.5 sq ft.

Low Severity: Patch has little or no deterioration.
Medium Severity: Patch is moderately deteriorated.
High Severity: Patch is badly deteriorated.

10. Small Patch



Patch that is smaller than 5.5 sq ft.

Low Severity: Patch has little or no deterioration.
Medium Severity: Patch is moderately deteriorated.
High Severity: Patch is badly deteriorated.

11. Polished Aggregate



Distress where traffic smooths the pavement surface so friction is diminished and cars can slide.

There are no Severity Levels for this distress.

12. Popouts



Small piece of pavement that breaks loose from surface.

There are no Severity Levels for this distress, however popouts must cover 3 per sq. meter of the slab.

13. Pumping



Ejection of material from slab foundation through joints or cracks along with water.

There are no Severity Levels for this distress.

14. Punchout



Localized area of a slab that is broken into many pieces.
Severity is determined by the following matrix.

Severity of Majority of Cracks	Number of Pieces		
	2 to 3	4 to 5	> 5
L	L	L	M
M	L	M	H
H	M	H	H

SECTION III

CITYWIDE
PAVEMENT CONDITION INDEX REPORT

A. 2024 Compton PCI Map
B. Name Order (A-Z)
C. PCI Order (0-100)

A. PAVEMENT CONDITION INDEX REPORTS - DEFINITIONS

Listed alphabetically by street name or PCI, this report provides the City with a listing of pertinent inventory and pavement condition data for each inventory unit within the City's pavement network. The Pavement Condition Index (PCI) Report notes the names, limits, classification, dimension, surface type, and lane configuration of each inventory unit.

Detailed descriptions of the information appearing on this report are presented below:

BRANCH NAME - The name of each inventory unit appears in this column. Generally, the inventory unit name is taken directly from a street sign; however, where no street signs are posted, the name appearing on the network map is noted instead.

A sample set of street name suffix abbreviation definitions is presented below:

AV -	Avenue	CT -	Court	CIR -	Circle
DR -	Drive	LN -	Lane	RD -	Road
ST -	Street	WAY -	Way	EB -	East Bound
NB -	North Bound	SB -	South Bound	WB -	West Bound

FROM - A description of the beginning limit of each inventory unit appears in this column. If the beginning limit exists between intersections, then the beginning limit description may be an address, post mile marker, or a distance from a known point of reference (e.g., "500' N/MAIN ST").

TO - A description of the ending limit of each inventory unit appears in this column. Like BEGIN limit, the END limit description may consist of a street name, an address, or a distance from a known point of reference. In the case of cul-de-sacs, or dead-ends, the END limit may consist of a directional reference, such as "NORTH END".

RANK - The codes for the seven functional classifications as the inventory unit appears in this column are represented below. Basically, units are classified according to traffic volume.

CODE	DESCRIPTION
A/B	Primary Arterial, Arterial
C	Collector
E	Local
I	Industrial
P	Private
O	Alley

SURFACE TYPE - A code was assigned to each inventory unit to describe surface type.

CODE	DESCRIPTION
AC	Asphalt Concrete
PCC	Concrete

LENGTH - The length of the section within each branch. The unit of measurement for the section length, typically linear feet (LF).

AREA - The area of each section within a branch. The unit of measurement for the section area, typically square feet (SF).

PCI - Pavement Condition Indices were calculated for inventory units based on severity and extent of distress manifestations observed within the inventory unit. Ranging between 0 and 100, a PCI of "100" corresponds to a pavement at the beginning of its life cycle, while a PCI of "0" corresponds to a badly deteriorated pavement which is at or near the end of its life cycle.

PCI CLIMATE, LOAD AND OTHER – reflects "Section Extrapolated Distress"; these values are shown within the Sample Distresses tab within the PCI window. Distresses are aggregated based on the type and severity level. For random samples, distress quantities are adjusted to reflect the extrapolated value based on the sections total area. Extrapolated distress deducts are classified as resulting from Climate, Load and Other distresses. The Distress Classification portion of the tab shows the "percent" of extrapolated distress deduct belonging to Climate, Load and Other (these %'s are shown within the PCI reports herein). These values are beneficial in that they support the decision whether to recommend slurry seal, overlay or reconstruction project for street sections.

Asphalt Distresses	Cause Classification	PCC Distresses	Cause Classification
Alligator cracking	Load	Blow up	Climate
Bleeding	Other	Corner break	Load
Block cracking	Climate	Divided Slab	Load
Bumps/Sags	Other	Durability cracking	Climate
Corrugation	Other	Faulting	Other
Depression	Other	Joint Seal cracking	Climate
Edge cracking	Load	Lane Shoulder Drop-off	Climate
Joint Reflection cracking	Climate	Linear cracking	Load
Lane Shoulder Drop-off	Climate	Small Patching	Other
L&T cracking	Climate	Large Patching	Other
Patch/Utility cut	Other	Polished Agg	Load
Polished Agg	Other	Popouts	Other
Pothole	Climate	Pumping	Other
RR Crossing	Other	Punchout	Load
Rutting	Load	RR Crossing	Other
Shoving	Other	Scaling/crazing	Other
Slippage cracking	Other	Shrinkage cracking	Other
Swell	Other	Corner Spall	Other
Raveling	Other	Joint Spall	Other
Weathering	Climate		

INSPECTION DATE – Represents the most recent inspection date performed on a given sections. PCI shown is historical in value and may not indicate what "today's" PCI is due to variance in time. Pavement deterioration calculations can be performed on a section(s) to demonstrate a deteriorated PCI based upon a new current date.

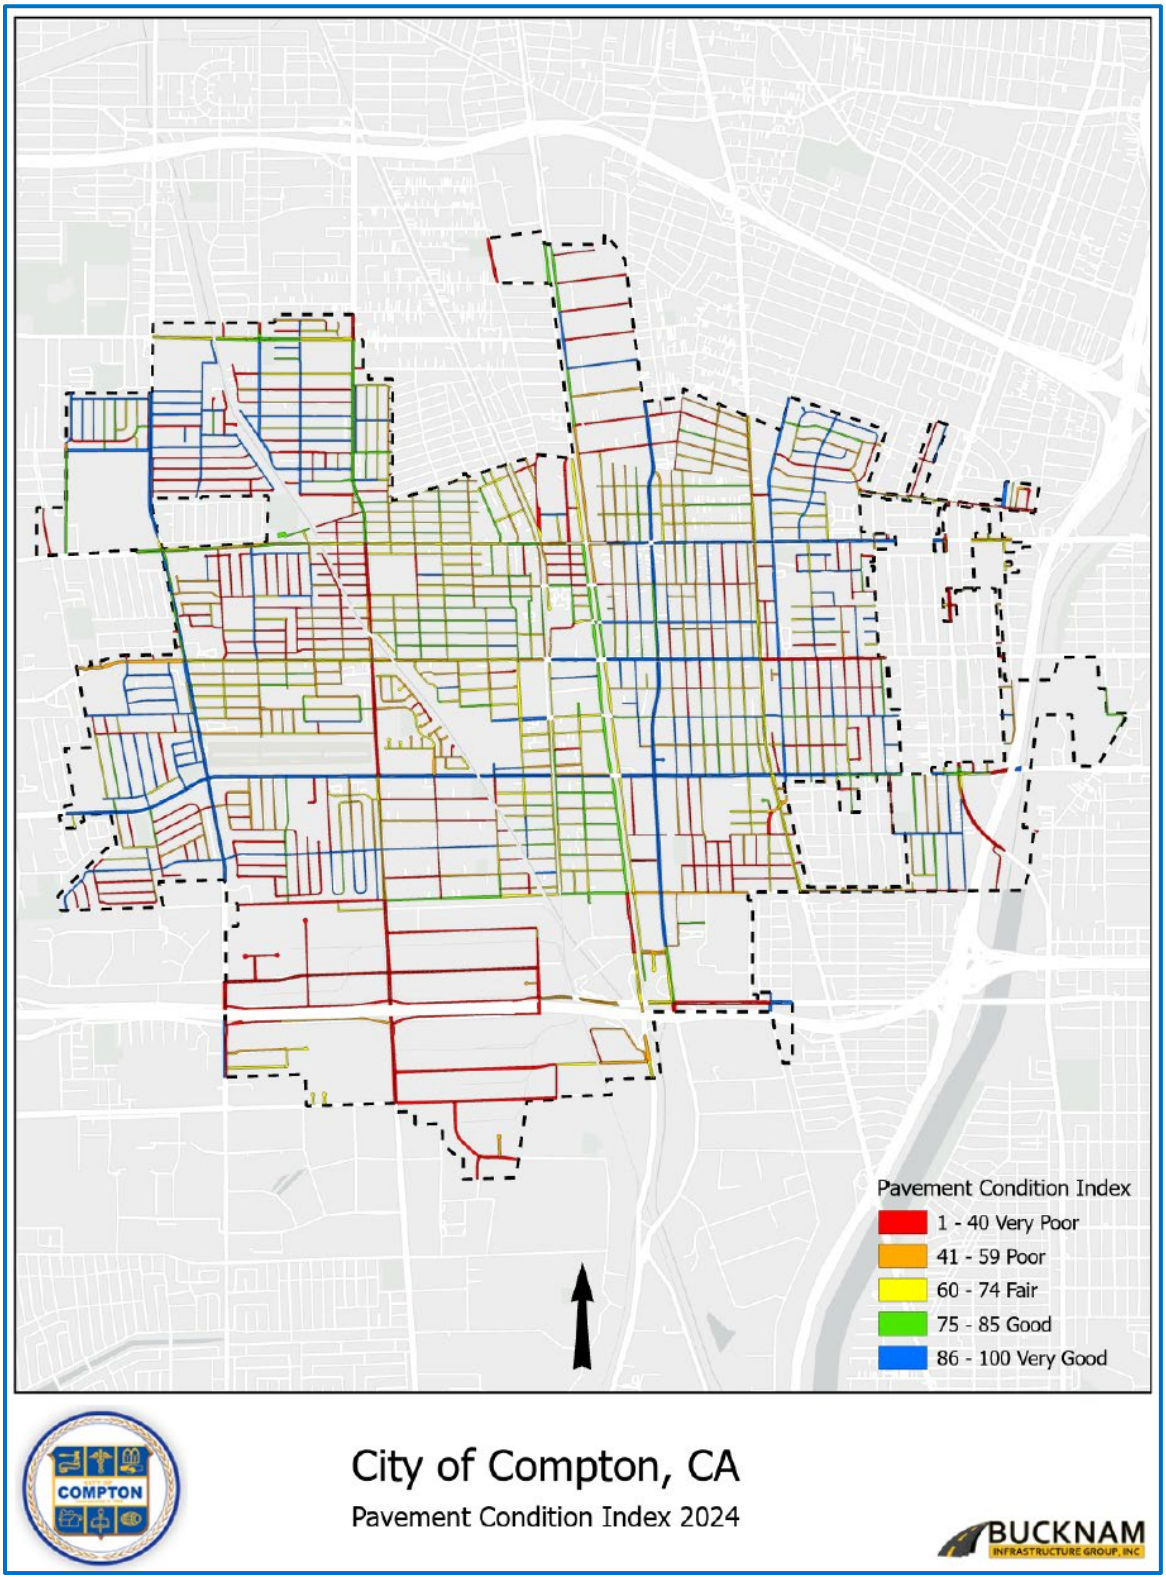


Figure 12 – 2024 Compton PCI Map

BranchID	Sec ID	Name	From	To	Surface Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
		Arterials / Collectors															
300	2	ACACIA AVE	ARTESIA BLVD (S)	WALNUT ST (W)	AC	C	4	1,085	76	60,257	6/10/24	28	22	66	12	New Construction - Initial	1/1/80
300	8	ACACIA AVE	ALONDRA BLVD (W)	MYRRH ST (W)	AC	C	2	1,305	40	49,305	6/5/24	72	66	34	0	New Construction - Initial	1/1/80
300	9	ACACIA AVE	MYRRH ST (W)	COMPTON BLVD (W)	AAC	C	4	1,390	60	74,604	6/5/24	63	32	67	1	Overlay - AC Structural	6/2/10
320	10	ALAMEDA ST NB	1450' N of ROSECRANS	PINE ST (E)	AC	B	2	1,290	46	61,394	6/17/24	53	59	30	11	New Construction - Initial	1/1/80
320	11	ALAMEDA ST NB	PINE ST (E)	CARLIN AVE (E)	AC	B	2	1,320	48	55,898	6/17/24	83	83	0	17	New Construction - Initial	1/1/80
320	12	ALAMEDA ST NB	CARLIN AVE (E)	BANNING ST (E)	AC	B	2	1,325	46	60,576	6/24/24	85	70	30	0	New Construction - Initial	1/1/80
320	13	ALAMEDA ST NB	BANNING ST (E)	CITY LIMITS (N)	AC	B	2	1,570	46	71,726	6/24/24	83	69	25	6	New Construction - Initial	1/1/80
320	3	ALAMEDA ST NB	GREENLEAF BLVD (E)	CALDWELL ST (E)	AC	B	2	1,454	39	57,600	6/10/24	70	52	36	12	New Construction - Initial	1/1/80
320	4	ALAMEDA ST NB	CALDWELL ST (E)	ALONDRA BLVD (E)	AC	B	2	1,260	40	47,201	6/10/24	66	41	41	18	New Construction - Initial	1/1/80
320	5	ALAMEDA ST NB	ALONDRA BLVD (E)	MYRRH ST (E)	AC	B	2	1,365	46	59,612	6/10/24	71	63	29	8	New Construction - Initial	1/1/80
320	6	ALAMEDA ST NB	MYRRH ST (E)	COMPTON BLVD (E)	AC	B	2	1,356	46	56,334	6/10/24	73	42	39	19	New Construction - Initial	1/1/80
320	7	ALAMEDA ST NB	COMPTON BLVD (E)	ELM ST (E)	AC	B	2	1,731	46	73,903	6/24/24	76	69	15	16	New Construction - Initial	1/1/80
320	8	ALAMEDA ST NB	ELM ST (E)	ROSECRANS AVE (E)	AC	B	2	967	46	42,925	6/24/24	43	50	49	1	New Construction - Initial	1/1/80
320	9	ALAMEDA ST NB	ROSECRANS AVE (E)	1450' N of ROSECRANS	AC	B	2	1,450	46	61,870	6/24/24	53	45	52	3	New Construction - Initial	1/1/80
330	1	ALAMEDA ST SB	CITY LIMITS (S)	MANVILLE ST (E)	AC	B	4	397	46	27,717	6/11/24	61	91	5	4	New Construction - Initial	1/1/80
330	10	ALAMEDA ST SB	ELM ST (E)	ROSECRANS AVE (E)	AC	B	4	971	60	50,119	6/19/24	76	39	18	43	New Construction - Initial	1/1/80
330	11	ALAMEDA ST SB	ROSECRANS AVE (E)	MEALY ST (E)	AC	B	4	816	58	43,590	6/19/24	66	27	49	24	New Construction - Initial	1/1/80
330	12	ALAMEDA ST SB	MEALY ST (E)	CITY LIMITS (N)	AC	B	4	1,190	58	63,886	6/19/24	70	45	40	15	New Construction - Initial	1/1/80
330	19	ALAMEDA ST SB	CITY LIMITS (N)	WEBER AVE (E)	AC	B	4	916	55	52,444	6/25/24	79	42	41	17	New Construction - Initial	1/1/80
330	2	ALAMEDA ST SB	MANVILLE ST (E)	ARTESIA BLVD (E)	AC	B	4	1,337	46	59,268	6/11/24	53	58	35	7	New Construction - Initial	1/1/80
330	3	ALAMEDA ST SB	ARTESIA BLVD (E)	AUTO DR (S)	AC	B	4	1,176	46	73,222	6/19/24	64	41	59	0	New Construction - Initial	1/1/80
330	4	ALAMEDA ST SB	AUTO DR (S)	GREENLEAF BLVD (E)	AC	B	4	1,405	46	84,323	6/19/24	39	24	64	12	New Construction - Initial	1/1/80
330	5	ALAMEDA ST SB	GREENLEAF BLVD (E)	CALDWELL ST (E)	AC	B	4	1,237	60	68,025	6/19/24	74	31	56	13	New Construction - Initial	1/1/80
330	6	ALAMEDA ST SB	CALDWELL ST (E)	ALONDRA BLVD (E)	AC	B	4	1,455	60	76,868	6/19/24	74	37	27	36	New Construction - Initial	1/1/80
330	7	ALAMEDA ST SB	ALONDRA BLVD (E)	MYRRH ST (E)	AC	B	4	1,423	60	71,475	6/19/24	75	39	16	45	New Construction - Initial	1/1/80
330	8	ALAMEDA ST SB	MYRRH ST (E)	COMPTON BLVD (E)	AC	B	4	1,282	60	69,645	6/19/24	80	35	31	34	New Construction - Initial	1/1/80
330	9	ALAMEDA ST SB	COMPTON BLVD (E)	ELM ST (E)	AC	B	4	1,731	60	84,251	6/19/24	77	38	25	37	New Construction - Initial	1/1/80
430	1	ALONDRA BLVD EB	CITY LIMITS (W)	OYMAR AVE (S)	AC	C	2	1,295	40	41,564	3/8/24	98	100	0	0	New Construction - Initial	1/1/80
430	10	ALONDRA BLVD EB	WILLOWBROOK AVE (S)	ALAMEDA ST (S)	AC	C	2	1,264	36	41,203	3/8/24	98	100	0	0	New Construction - Initial	1/1/80
430	11	ALONDRA BLVD EB	ALAMEDA ST (S)	SANTA FE AVE (S)	AC	C	2	966	32	24,471	3/8/24	98	100	0	0	New Construction - Initial	1/1/80
430	12	ALONDRA BLVD EB	SANTA FE AVE (S)	MAYO AVE (S)	AC	C	2	1,150	33	38,883	3/8/24	98	100	0	0	New Construction - Initial	1/1/80
430	13	ALONDRA BLVD EB	MAYO AVE (S)	LONG BEACH BLVD (S)	AC	C	2	1,485	33	53,583	3/8/24	98	100	0	0	New Construction - Initial	1/1/80
430	14	ALONDRA BLVD EB	LONG BEACH BLVD (S)	PANNES AVE (S)	AC	C	2	1,475	33	52,971	3/8/24	98	100	0	0	New Construction - Initial	1/1/80
430	15	ALONDRA BLVD EB	PANNES AVE (S)	310' E of HARRIS AVE (S)	AC	C	2	1,443	33	49,602	3/8/24	84	48	52	0	New Construction - Initial	1/1/80
430	16	ALONDRA BLVD EB	CITY LIMITS (W)	315' W of ATLANTIC (S)	AC	C	2	279	28	8,169	6/25/24	89	76	24	0	New Construction - Initial	1/1/80
430	17	ALONDRA BLVD EB	315' W of ATLANTIC (S)	ATLANTIC AVE (S)	PCC	C	3	315	33	14,421	6/25/24	78	34	23	43	New Construction - Initial	1/1/80
430	18	ALONDRA BLVD EB	ATLANTIC AVE (S)	I-710 SB ON RAMP	AC	C	2	612	30	19,928	6/26/24	69	45	55	0	New Construction - Initial	1/1/80
430	19	ALONDRA BLVD EB	I-710 SB ON RAMP	I-710 OVERPASS	AC	C	2	380	36	16,576	6/26/24	33	46	54	0	New Construction - Initial	1/1/80
430	2	ALONDRA BLVD EB	OYMAR AVE (S)	KEENE AVE (S)	AC	C	2	1,710	36	61,930	3/8/24	98	100	0	0	New Construction - Initial	1/1/80
430	20	ALONDRA BLVD EB	I-710 OVERPASS	CITY LIMITS	AAC	C	2	135	36	7,210	6/26/24	98	100	0	0	Overlay - AC Structural	7/14/20
430	21	ALONDRA BLVD EB	ATLANTIC AVE	END PCC	PCC	C	2	140	30	4,539	6/26/24	61	70	0	30	New Construction - Initial	1/1/80
430	3	ALONDRA BLVD EB	KENNE AVE (S)	CENTRAL AVE (S)	AC	C	2	545	33	19,491	3/8/24	97	60	40	0	New Construction - Initial	1/1/80
430	4	ALONDRA BLVD EB	CENTRAL AVE (S)	NORTHWOOD AVE (S)	AC	C	2	1,785	30	51,413	3/8/24	96	100	0	0	New Construction - Initial	1/1/80
430	5	ALONDRA BLVD EB	NORTHWOOD AVE (S)	DWIGHT AVE (S)	AC	C	2	925	30	27,563	3/8/24	96	100	0	0	New Construction - Initial	1/1/80
430	6	ALONDRA BLVD EB	DWIGHT AVE (S)	WILMINGTON AVE (S)	AC	C	2	1,151	33	38,209	3/8/24	98	100	0	0	New Construction - Initial	1/1/80
430	7	ALONDRA BLVD EB	WILMINGTON AVE (S)	CENTER AVE (S)	AC	C	2	1,285	36	45,780	3/8/24	98	100	0	0	New Construction - Initial	1/1/80
430	8	ALONDRA BLVD EB	CENTER AVE (S)	OLEANDER AVE (S)	AC	C	2	1,368	40	47,741	3/8/24	98	100	0	0	New Construction - Initial	1/1/80
430	9	ALONDRA BLVD EB	OLEANDER AVE (S)	WILLOWBROOK AVE (S)	AC	C	2	1,340	36	43,277	3/8/24	97	60	40	0	New Construction - Initial	1/1/80
450	1	ALONDRA BLVD WB	CITY LIMITS (E)	I-710 OVERPASS	AC	C	2	135	36	5,586	6/26/24	98	100	0	0	New Construction - Initial	1/1/80
450	10	ALONDRA BLVD WB	WILLOWBROOK AVE (S)	OLEANDER AVE (S)	AC	C	2	1,345	35	45,314	3/8/24	97	100	0	0	New Construction - Initial	1/1/80
450	11	ALONDRA BLVD WB	OLEANDER AVE (S)	CENTER AVE (S)	AC	C	2	1,365	46	45,724	3/8/24	97	100	0	0	New Construction - Initial	1/1/80
450	12	ALONDRA BLVD WB	CENTER AVE (S)	WILMINGTON AVE (S)	AC	C	2	1,290	42	46,708	3/8/24	96	72	28	0	New Construction - Initial	1/1/80
450	13	ALONDRA BLVD WB	WILMINGTON AVE (S)	DWIGHT AVE (S)	AC	C	2	1,150	32	42,857	3/8/24	98	100	0	0	New Construction - Initial	1/1/80
450	14	ALONDRA BLVD WB	DWIGHT AVE (S)	NORTHWOOD AVE (S)	AC	C	2	930	32	36,345	3/8/24	98	100	0	0	New Construction - Initial	1/1/80
450	15	ALONDRA BLVD WB	NORTHWOOD AVE (S)	CENTRAL AVE (S)	AC	C	2	1,765	32	63,646	3/8/24	98	100	0	0	New Construction - Initial	1/1/80
450	16	ALONDRA BLVD WB	CENTRAL AVE (S)	KEENE AVE (S)	AC	C	2	545	36	17,667	3/8/24	98	100	0	0	New Construction - Initial	1/1/80
450	17	ALONDRA BLVD WB	KEENE AVE (S)	OYMAR AVE (S)	AC	C	2	1,710	38	63,357	3/8/24	98	100	0	0	New Construction - Initial	1/1/80
450	18	ALONDRA BLVD WB	OYMAR AVE (S)	CITY LIMIT (W)	AC	C	2	1,290	38	42,006	3/8/24	98	100	0	0	New Construction - Initial	1/1/80
450	19	ALONDRA BLVD WB	I-710 OVERPASS	I-710 SB ON RAMP	AC	C	2	440	36	16,456	6/26/24	33	29	71	0	New Construction - Initial	1/1/80

BranchID	Sec ID	Name	From	To	Surface Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
450	2	ALONDRA BLVD WB	LIME AVE (S)	ATLANTIC AVE (S)	PCC	C	4	350	50	12,932	6/26/24	80	54	0	46	New Construction - Initial	1/1/80
450	20	ALONDRA BLVD WB	I-710 SB ON RAMP	LIME ST (S)	AC	C	2	408	33	16,282	6/26/24	98	100	0	0	New Construction - Initial	1/1/80
450	21	ALONDRA BLVD WB	ATLANTIC AVE	END PCC	PCC	C	2	140	24	5,202	6/26/24	80	45	16	39	New Construction - Initial	1/1/80
450	3	ALONDRA BLVD WB	END PCC W/ ATLANTIC AVE	CITY LIMITS (W)	AC	C	2	639	35	18,824	3/8/24	98	100	0	0	New Construction - Initial	1/1/80
450	4	ALONDRA BLVD WB	CITY LIMITS (E)	PANNES AVE (S)	AC	C	2	1,443	36	53,760	3/8/24	87	45	55	0	New Construction - Initial	1/1/80
450	5	ALONDRA BLVD WB	PANNES AVE (S)	LONG BEACH BLVD (S)	AC	C	2	1,475	36	49,584	3/8/24	98	65	35	0	New Construction - Initial	1/1/80
450	6	ALONDRA BLVD WB	LONG BEACH BLVD (S)	MAYO AVE (S)	AC	C	2	1,485	34	51,683	3/8/24	98	100	0	0	New Construction - Initial	1/1/80
450	7	ALONDRA BLVD WB	MAYO AVE (S)	SANTA FE AVE (S)	AC	C	2	1,150	34	42,810	3/8/24	98	100	0	0	New Construction - Initial	1/1/80
450	8	ALONDRA BLVD WB	SANTA FE AVE (S)	ALAMEDA ST (S)	AC	C	2	975	34	25,282	3/8/24	97	100	0	0	New Construction - Initial	1/1/80
450	9	ALONDRA BLVD WB	ALAMEDA ST (S)	WILLOWBROOK AVE (S)	AC	C	2	1,270	34	40,050	3/8/24	52	54	46	0	New Construction - Initial	1/1/80
530	1	ARTESIA BLVD EB	CENTRAL AVE (S)	1285' E of CENTRAL AVE	AC	A	2	1,285	24	49,982	6/10/24	39	59	40	1	New Construction - Initial	1/1/80
530	2	ARTESIA BLVD EB	1285' E of CENTRAL AVE	2570' E of CENTRAL AVE	AC	A	2	1,285	24	38,137	6/10/24	44	61	38	1	New Construction - Initial	1/1/80
530	3	ARTESIA BLVD EB	2580' E of CENTRAL AVE	WILMINGTON AVE (S)	AC	A	2	1,285	24	46,533	6/10/24	42	50	34	16	New Construction - Initial	1/1/80
530	4	ARTESIA BLVD EB	WILMINGTON AVE (S)	1850' E of WILMINGTON	AC	A	2	1,850	24	62,192	6/10/24	31	41	51	8	New Construction - Initial	1/1/80
530	5	ARTESIA BLVD EB	1850' E of WILMINGTON	ACACIA AVE (S)	AC	A	2	1,580	24	56,043	6/10/24	20	40	60	0	New Construction - Initial	1/1/80
530	6	ARTESIA BLVD EB	ACACIA AVE	RR TRACK OVERPASS	AC	A	2	748	22	17,887	6/10/24	48	35	65	0	New Construction - Initial	1/1/80
530	7	ARTESIA BLVD EB	RR TRACK OVERPASS	ALAMEDA ST OVERPASS	AC	A	2	895	22	29,675	6/10/24	57	37	59	4	New Construction - Initial	1/1/80
530	8	ARTESIA BLVD EB	ALAMEDA ST OVERPASS	SANTA FE AVE	AC	A	2	570	34	22,409	6/25/24	60	55	45	0	New Construction - Initial	1/1/80
540	1	ARTESIA BLVD WB	ALAMEDA ST OVERPASS	RR TRACKS OVERPASS	AC	A	4	885	22	22,383	6/10/24	51	29	71	0	New Construction - Initial	1/1/80
540	10	ARTESIA BLVD WB	RR TRACKS OVERPASS	ACACIA AVE	AC	A	2	756	22	15,638	6/10/24	50	19	81	0	New Construction - Initial	1/1/80
540	2	ARTESIA BLVD WB	ACACIA AVE (S)	AMERICAN DAWN INC	AC	A	2	1,452	33	52,920	6/10/24	21	33	57	10	New Construction - Initial	1/1/80
540	3	ARTESIA BLVD WB	AMERICAN DAWN INC	WILMINGTON AVE (S)	AC	A	2	2,003	33	64,943	6/10/24	27	41	57	2	New Construction - Initial	1/1/80
540	4	ARTESIA BLVD WB	WILMINGTON AVE (S)	ANDERSON AVE (S)	AC	A	2	1,890	30	62,562	6/10/24	24	40	50	10	New Construction - Initial	1/1/80
540	5	ARTESIA BLVD WB	ANDERSON AVE (S)	CENTRAL AVE (S)	AC	A	2	1,925	30	63,603	6/10/24	34	60	28	12	New Construction - Initial	1/1/80
540	6	ARTESIA BLVD WB	SANTA FE AVE (S)	ALAMEDA ST OVERPASS	AC	A	4	570	34	19,791	6/25/24	60	61	39	0	New Construction - Initial	1/1/80
540	7	ARTESIA BLVD WB	SANTA FE AVE (S)	HARBOR AVE (S)	AC	A	2	2,232	42	84,403	6/25/24	21	32	50	18	New Construction - Initial	1/1/80
540	8	ARTESIA BLVD WB	HARBOR AVE (S)	CITY LIMITS (E)	AC	A	2	505	36	40,554	6/25/24	91	85	15	0	Complete Reconstruction - AC	5/1/16
540	9	ARTESIA BLVD WB	HARBOR AVE (S)	SANTA FE AVE (S)	AC	A	2	2,232	40	81,783	6/25/24	28	34	44	22	New Construction - Initial	1/1/80
560	1	ATLANTIC AVE NB	BRIDGE DECK	SPORTSMAN DR (S)	AC	A	2	281	40	7,470	6/25/24	31	53	37	10	New Construction - Initial	1/1/80
560	10	ATLANTIC AVE NB	BEGIN PCC (300' S/ ALONDRA BLVD)	ALONDRA BLVD	PCC	A	2	310	32	13,281	6/26/24	66	66	5	29	New Construction - Initial	1/1/80
560	11	ATLANTIC AVE NB	ALONDRA BLVD	END PCC	PCC	A	2	87	30	2,544	6/26/24	80	100	0	0	New Construction - Initial	1/1/80
560	2	ATLANTIC AVE NB	SPORTSMAN DR (S)	ATLANTIC DR (S)	AC	A	2	1,336	44	45,894	6/18/24	29	51	37	12	New Construction - Initial	1/1/80
560	3	ATLANTIC AVE NB	ATLANTIC DR (S)	BEGIN PCC	AC	A	2	572	34	8,559	6/18/24	32	60	30	10	New Construction - Initial	1/1/80
560	4	ATLANTIC AVE NB	ALONDRA BLVD (E)	CITY LIMITS (N)	AC	A	2	254	28	4,113	6/26/24	11	36	49	15	New Construction - Initial	1/1/80
560	5	ATLANTIC AVE NB	CITY LIMITS (S)	SAN VINCENTE ST (E)	AC	A	2	378	34	13,341	6/26/24	21	28	50	22	New Construction - Initial	1/1/80
560	6	ATLANTIC AVE NB	SAN VINCENTE ST (E)	CITY LIMITS (N)	AC	A	2	393	34	12,561	6/26/24	22	22	57	21	New Construction - Initial	1/1/80
560	7	ATLANTIC AVE NB	CITY LIMTS (S)	ROSECRANS AVE (E)	AC	A	2	252	34	10,146	6/26/24	33	40	60	0	New Construction - Initial	1/1/80
560	8	ATLANTIC AVE NB	ROSECRANS AVE (E)	CITY LIMIT (N)	AC	A	2	164	34	4,219	6/26/24	53	100	0	0	New Construction - Initial	1/1/80
560	9	ATLANTIC AVE NB	CITY LIMITS (S)	MCMILLAN ST (E)	AC	A	2	134	28	3,821	6/26/24	34	67	33	0	New Construction - Initial	1/1/80
550	1	ATLANTIC AVE SB	MCMILLAN ST (E)	CITY LIMITS (S)	APC	A	2	134	34	2,864	6/26/24	55	36	64	0	New Construction - Initial	1/1/80
550	10	ATLANTIC AVE SB	BEGIN PCC (145' N/ ALONDRA BLVD)	ALONDRA BLVD	PCC	A	2	145	40	5,780	6/26/24	85	43	0	57	New Construction - Initial	1/1/80
550	11	ATLANTIC AVE SB	ALONDRA BLVD	END PCC (85' S/ ALONDRA BLVD)	PCC	A	2	85	32	2,222	6/25/24	84	66	0	34	New Construction - Initial	1/1/80
550	2	ATLANTIC AVE SB	CITY LIMITS (N)	ROSECRANS AVE (E)	AC	A	2	164	34	5,582	6/26/24	38	70	30	0	New Construction - Initial	1/1/80
550	3	ATLANTIC AVE SB	ROSECRANS AVE (E)	CITY LIMITS (S)	AC	A	2	252	34	8,222	6/26/24	55	48	52	0	New Construction - Initial	1/1/80
550	4	ATLANTIC AVE SB	CITY LIMITS (N)	SAN VINCENTE ST (E)	AC	A	2	393	34	14,216	6/26/24	33	39	44	17	New Construction - Initial	1/1/80
550	5	ATLANTIC AVE SB	SAN VINCENTE ST (E)	CITY LIMITS (S)	AC	A	2	378	34	12,069	6/26/24	25	41	59	0	New Construction - Initial	1/1/80
550	6	ATLANTIC AVE SB	CITY LIMITS (N)	ALONDRA BLVD (E)	AC	A	3	254	34	3,429	6/26/24	19	39	44	17	New Construction - Initial	1/1/80
550	7	ATLANTIC AVE SB	ALONDRA BLVD (E)	ATLANTIC DR (S)	AC	A	2	572	34	17,358	6/25/24	43	53	44	3	New Construction - Initial	1/1/80
550	8	ATLANTIC AVE SB	ATLANTIC DR (S)	SPORTSMAN DR (S)	AC	A	2	1,336	35	46,344	6/25/24	38	47	44	9	New Construction - Initial	1/1/80
550	9	ATLANTIC AVE SB	SPORTSMAN DR (S)	BRIDGE DECK	AC	A	2	281	40	7,911	6/25/24	36	54	38	8	New Construction - Initial	1/1/80
730	1	BRADFIELD AVE (N)	COMPTON BLVD (E)	SAN VINCENTE ST (E)	AAC	B	2	1,207	36	31,916	6/4/24	97	84	0	16	Overlay - AC Structural	7/14/20
730	2	BRADFIELD AVE (N)	SAN VINCENTE ST (E)	ROSECRANS AVE (E)	AC	C	2	1,512	36	43,401	6/4/24	62	23	71	6	Complete Reconstruction - AC	3/31/20
730	3	BRADFIELD AVE (N)	ROSECRANS AVE (E)	EZMIRLIAM ST (E)	AAC	C	2	949	36	33,085	4/17/24	100	0	0	0	Overlay - AC Structural	6/13/23
730	4	BRADFIELD AVE (N)	EZMIRLIAM ST (E)	DIANE DR (E)	AAC	C	2	1,164	36	40,565	4/17/24	100	0	0	0	Overlay - AC Structural	6/13/23
730	5	BRADFIELD AVE (N)	DIANE DR (E)	CITY LIMITS	AAC	C	2	1,031	36	36,427	4/17/24	100	0	0	0	Overlay - AC Structural	6/13/23
840	1	CALDWELL ST (E)	WILLOWBROOK AVE (S)	ALAMEDA ST (S)	AC	B	2	1,417	36	37,509	6/12/24	76	58	42	0	New Construction - Initial	1/1/80
840	2	CALDWELL ST (E)	ALAMEDA ST (S)	END (E)	AC	B	2	981	20	15,490	6/10/24	12	42	56	2	New Construction - Initial	1/1/80
840	3	CALDWELL ST (E)	END (W)	MAYO AVE (S)	AC	B	2	680	36	21,619	6/24/24	19	23	63	14	New Construction - Initial	1/1/80
840	4	CALDWELL ST (E)	MAYO AVE (S)	BURRIS AVE (S)	AC	B	2	580	36	16,237	6/24/24	24	29	58	13	New Construction - Initial	1/1/80
840	5	CALDWELL ST (E)	BURRIS AVE (S)	TEMPLE AVE (S)	AC	B	2	889	36	31,256	6/25/24	45	38	62	0	Surface Treatment - Slurry Seal	1/19/16

BranchID	Sec ID	Name	From	To	Surface Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
840	6	CALDWELL ST (E)	TEMPLE AVE (S)	CITY LIMITS	AC	B	2	545	36	18,515	6/25/24	31	38	52	10	New Construction - Initial	1/1/80
840	7	CALDWELL ST (E)	HARRIS AVE	ATLANTIC DR (S)	AC	B	2	1,570	33	53,061	6/18/24	95	100	0	0	Complete Reconstruction - AC	5/1/16
830	1	CALDWELL ST (W)	END (W)	MCKINLEY AVE	AAC	B	2	1,195	36	40,679	4/5/24	96	100	0	0	Overlay - AC Structural	7/14/20
830	10	CALDWELL ST (W)	OLEANDER AVE (S)	END	AC	B	2	404	36	14,204	6/12/24	44	16	83	1	Cape Seal	1/1/15
830	11	CALDWELL ST (W)	END (W)	WILLOWBROOK AVE (S)	AC	B	2	778	36	27,937	6/12/24	79	66	34	0	New Construction - Initial	1/1/80
830	2	CALDWELL ST (W)	MCKINLEY AVE	WADSWORTH AVE (S)	AAC	B	2	1,308	36	44,164	4/5/24	96	100	0	0	Overlay - AC Structural	7/14/20
830	3	CALDWELL ST (W)	WADSWORTH AVE (S)	KEENE AVE (S)	AAC	B	2	1,149	36	37,750	4/5/24	96	100	0	0	Overlay - AC Structural	7/14/20
830	4	CALDWELL ST (W)	KEENE AVE (S)	HILLFORD AVE (S)	AAC	B	2	884	36	27,375	4/5/24	93	49	51	0	Overlay - AC Structural	7/14/20
830	5	CALDWELL ST (W)	HILLFORD AVE (S)	NORTHWOOD AVE (S)	AAC	B	2	1,165	36	42,523	4/5/24	95	100	0	0	Overlay - AC Structural	7/14/20
830	6	CALDWELL ST (W)	NORTHWOOD AVE (S)	DWIGHT AVE (S)	AAC	B	2	1,032	36	36,004	4/5/24	94	100	0	0	Overlay - AC Structural	7/14/20
830	7	CALDWELL ST (W)	DWIGHT AVE (S)	WILMINGTON AVE (S)	AAC	B	2	1,190	36	39,522	4/5/24	93	68	32	0	Overlay - AC Structural	7/14/20
830	8	CALDWELL ST (W)	WILMINGTON AVE (S)	CENTER ST (S)	AAC	B	2	1,297	36	37,724	6/12/24	90	60	40	0	Overlay - AC Structural	7/14/20
830	9	CALDWELL ST (W)	CENTER ST (S)	OLEANDER AVE (S)	AAC	B	2	1,372	36	39,652	6/12/24	89	24	71	5	Overlay - AC Structural	7/14/20
3130	1	CASTLEGATE AVE (S)	CITY LIMITS	MCMILLAN ST (E)	AC	B	2	130	36	3,060	6/26/24	84	93	0	7	New Construction - Initial	1/1/80
920	1	CENTER AVE (S)	GREENLEAF BLVD (W)	BENNETT ST (W)	AC	C	2	517	36	10,534	4/12/24	37	21	70	9	New Construction - Initial	1/1/80
920	2	CENTER AVE (S)	BENNETT ST (W)	CALDWELL ST (W)	AC	C	2	658	36	12,748	4/12/24	39	17	65	18	Surface Treatment-Cape Seal	1/19/16
920	3	CENTER AVE (S)	CALDWELL ST (W)	TICHENOR ST (W)	AC	C	2	627	24	11,703	4/12/24	22	20	75	5	New Construction - Initial	1/1/80
920	4	CENTER AVE (S)	TICHENOR ST (W)	ALONDRA BLVD (W)	AC	C	2	999	20	19,966	4/12/24	26	14	78	8	New Construction - Initial	1/1/80
920	5	CENTER AVE (S)	ALONDRA BLVD (W)	CYPRESS ST (W)	AAC	C	2	641	36	30,803	4/12/24	58	49	49	2	Overlay - AC Structural	1/18/11
920	6	CENTER AVE (S)	CYPRESS ST (W)	LAUREL ST (W)	AAC	C	2	1,108	36	40,434	4/12/24	64	64	36	0	Overlay - AC Structural	1/18/11
930	1	CENTRAL AVE NB	CITY LIMITS (S)	91 FWY BRIDGE	AC	A	2	1,208	36	54,370	6/11/24	24	28	69	3	New Construction - Initial	1/1/80
930	10	CENTRAL AVE NB	156TH ST (W)	154TH ST (W)	AC	A	2	465	33	20,784	4/16/24	95	100	0	0	Complete Reconstruction - AC	1/15/19
930	11	CENTRAL AVE NB	154TH ST (W)	COMPTON BLVD (W)	AC	A	2	1,135	32	38,335	4/16/24	92	51	49	0	Complete Reconstruction - AC	1/15/19
930	12	CENTRAL AVE NB	COMPTON BLVD (W)	POPLAR ST (W)	AC	A	1	1,518	28	49,908	4/16/24	86	99	1	0	Complete Reconstruction - AC	5/1/16
930	13	CENTRAL AVE NB	POPLAR ST (W)	ROSECRANS AVE (W)	AC	A	1	1,060	22	33,919	4/16/24	83	75	25	0	Complete Reconstruction - AC	5/1/16
930	14	CENTRAL AVE NB	CITY LIMITS (S)	138TH ST (W)	AC	A	2	670	35	30,915	4/15/24	92	100	0	0	Complete Reconstruction - AC	5/1/16
930	15	CENTRAL AVE NB	138TH ST (W)	PIRU ST (W)	AC	A	2	775	35	29,930	4/15/24	92	100	0	0	Complete Reconstruction - AC	5/1/16
930	16	CENTRAL AVE NB	PIRU ST (W)	STOCKWELL ST (W)	AC	A	2	210	35	7,249	4/15/24	91	95	0	5	Complete Reconstruction - AC	5/1/16
930	17	CENTRAL AVE NB	STOCKWELL ST (W)	CITY LIMITS (N)	AC	A	2	1,280	35	45,302	4/15/24	89	79	21	0	Complete Reconstruction - AC	5/1/16
930	2	CENTRAL AVE NB	91 FWY BRIDGE	WALNUT ST (W)	AC	A	2	610	36	23,679	6/11/24	26	40	58	2	New Construction - Initial	1/1/80
930	3	CENTRAL AVE NB	CEMENTARY ENT.	REEVE ST (W)	AC	A	2	1,780	35	56,617	4/16/24	94	80	20	0	Complete Reconstruction - AC	1/15/19
930	4	CENTRAL AVE NB	REEVE ST (W)	ALONDRA BLVD (W)	AC	A	2	675	34	22,063	4/16/24	93	58	42	0	Complete Reconstruction - AC	1/15/19
930	5	CENTRAL AVE NB	ALONDRA BLVD (W)	156TH ST (W)	AC	A	2	1,105	30	37,349	4/16/24	94	80	20	0	Complete Reconstruction - AC	1/15/19
3490	1	CENTRAL AVE SB	CITY LIMITS (N)	135TH ST (W)	AC	A	2	1,280	35	49,278	4/15/24	90	100	0	0	Complete Reconstruction - AC	5/1/16
3490	10	CENTRAL AVE SB	ALONDRA BLVD (W)	REEVE ST (W)	AC	A	2	675	30	21,726	4/16/24	94	78	0	22	Complete Reconstruction - AC	1/15/19
3490	11	CENTRAL AVE SB	REEVE ST (W)	CITY LIMIT (S)	AC	A	2	1,780	30	51,976	4/16/24	94	78	22	0	Complete Reconstruction - AC	1/15/19
3490	12	CENTRAL AVE SB	WALNUT ST (W)	ARTESIA BLVD (W)	AC	A	3	610	30	23,333	6/11/24	33	46	46	8	New Construction - Initial	1/1/80
3490	13	CENTRAL AVE SB	91 FWY BRIDGE	CITY LIMIT (S)	AC	A	2	1,335	32	50,337	6/11/24	90	76	0	24	New Construction - Initial	1/1/80
3490	2	CENTRAL AVE SB	135TH ST (W)	PIRU ST(W)	AC	A	2	210	35	8,615	4/15/24	91	95	0	5	Complete Reconstruction - AC	5/1/16
3490	3	CENTRAL AVE SB	PIRU ST (W)	200' N ROSECRANS AVE (W)	AC	A	2	1,876	35	68,338	4/15/24	90	95	0	5	Complete Reconstruction - AC	5/1/16
3490	4	CENTRAL AVE SB	200' N ROSECRANS AVE	ROSECRANS AVE (W)	PCC	A	2	200	35	9,732	4/15/24	67	8	46	46	New Construction - Initial	1/1/80
3490	5	CENTRAL AVE SB	ROSECRANS AVE (W)	POPLAR ST (W)	AC	A	1	1,060	21	38,008	4/16/24	87	100	0	0	Complete Reconstruction - AC	5/1/16
3490	6	CENTRAL AVE SB	POPLAR ST (W)	COMPTON BLVD (W)	AC	A	2	1,518	30	49,033	4/16/24	85	78	8	14	Complete Reconstruction - AC	5/1/16
3490	7	CENTRAL AVE SB	COMPTON BLVD (W)	154TH ST (W)	AC	A	2	1,232	30	49,487	4/16/24	96	100	0	0	Complete Reconstruction - AC	1/15/19
3490	8	CENTRAL AVE SB	154TH ST (W)	156TH ST (W)	AC	A	2	463	30	17,010	4/16/24	96	100	0	0	Complete Reconstruction - AC	1/15/19
3490	9	CENTRAL AVE SB	156TH ST (W)	ALONDRA BLVD (W)	AC	A	2	1,105	30	35,547	4/16/24	94	55	45	0	Complete Reconstruction - AC	1/15/19
1030	4	COMPTON AVE	END PCC N/ EL SEGUNDO BLVD	CITY LIMITS (N)	AC	C	4	380	60	12,203	5/29/24	25	35	54	11	New Construction - Initial	1/1/80
1030	5	COMPTON AVE	EL SEGUNDO BLVD	END PCC N/ EL SEGUNDO BLVD	PCC	C	2	215	60	9,556	5/29/24	78	23	20	57	New Construction - Initial	1/1/80
1040	1	COMPTON BLVD EB	CITY LIMITS (W)	APRILLA AVE (S)	AC	A	2	1,170	35	78,472	6/17/24	41	43	56	1	New Construction - Initial	1/1/80
1040	10	COMPTON BLVD EB	ALAMEDA ST (S)	SANTA FE AVE (S)	AAC	A	2	1,265	36	48,133	6/4/24	91	35	34	31	Overlay - AC Structural	12/18/17
1040	11	COMPTON BLVD EB	SANTA FE AVE (S)	BURRIS AVE (S)	AAC	A	2	1,285	38	50,113	6/4/24	94	43	48	9	Overlay - AC Structural	12/18/17
1040	12	COMPTON BLVD EB	BURRIS AVE (S)	LONG BEACH BLVD (S)	AAC	A	2	1,055	37	42,582	6/4/24	96	39	0	61	Overlay - AC Structural	12/18/17
1040	13	COMPTON BLVD EB	LONG BEACH BLVD (S)	BRADFORD AVE (S)	AC	A	2	1,315	39	47,811	6/26/24	34	44	40	16	New Construction - Initial	1/1/80
1040	14	COMPTON BLVD EB	BRADFORD AVE (S)	LOCUST AVE (S)	AC	A	2	945	32	35,541	6/18/24	28	47	42	11	New Construction - Initial	1/1/80
1040	15	COMPTON BLVD EB	LOCUST AVE (S)	HARRIS AVE (S)	AC	A	2	640	32	18,005	6/18/24	25	46	39	15	New Construction - Initial	1/1/80
1040	16	COMPTON BLVD EB	HARRIS AVE (S)	CITY LIMITS (E)	AC	A	2	145	32	4,179	6/18/24	28	46	44	10	New Construction - Initial	1/1/80
1040	2	COMPTON BLVD EB	APRILLA AVE (S)	CENTRAL AVE (S)	AC	A	2	1,320	32	91,479	6/17/24	45	36	48	16	New Construction - Initial	1/1/80
1040	3	COMPTON BLVD EB	CENTRAL AVE (S)	TAJAUTA AVE (S)	AC	A	2	1,640	32	49,963	6/17/24	69	26	34	40	New Construction - Initial	1/1/80
1040	4	COMPTON BLVD EB	TAJAUTA AVE (S)	DWIGHT AVE (S)	AC	A	2	1,310	32	40,273	6/17/24	64	28	36	36	New Construction - Initial	1/1/80
1040	5	COMPTON BLVD EB	DWIGHT AVE (S)	WILMINGTON AVE (S)	AC	A	2	1,310	30	37,741	6/17/24	65	23	53	24	New Construction - Initial	1/1/80

BranchID	Sec ID	Name	From	To	Surface Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1040	55	COMPTON BLVD EB	WILLIAMS AVE (E)	CITY LIMITS (E)	AC	A	2	98	38	3,028	6/26/24	19	44	36	20	New Construction - Initial	1/1/80
1040	6	COMPTON BLVD EB	WILMINGTON AVE (S)	ARANBE AVE (N)	AC	A	2	1,715	28	43,623	6/17/24	68	45	36	19	New Construction - Initial	1/1/80
1040	7	COMPTON BLVD EB	ARANBE AVE (N)	ACACIA AVE (S)	AC	A	2	1,625	28	45,197	5/30/24	65	64	31	5	New Construction - Initial	1/1/80
1040	8	COMPTON BLVD EB	ACACIA AVE (S)	WILLOWBROOK AVE (S)	AC	A	2	670	32	21,431	5/30/24	57	39	54	7	New Construction - Initial	1/1/80
1040	9	COMPTON BLVD EB	WILLOWBROOK AVE (S)	ALAMEDA ST (S)	AAC	A	2	1,255	32	31,863	5/30/24	93	24	69	7	Overlay - AC Structural	7/14/20
1050	1	COMPTON BLVD WB	CITY LIMITS (E)	WILLIAMS AVE (E)	AC	A	2	95	38	3,451	6/26/24	24	37	45	18	New Construction - Initial	1/1/80
1050	10	COMPTON BLVD WB	WILLOWBROOK AVE (N)	ACACIA AVE (N)	AC	A	2	660	26	16,205	5/30/24	76	52	22	26	New Construction - Initial	1/1/80
1050	11	COMPTON BLVD WB	ACACIA AVE (N)	ARANBE AVE (N)	AC	A	2	1,620	32	44,456	5/30/24	68	53	32	15	New Construction - Initial	1/1/80
1050	12	COMPTON BLVD WB	ARANBE AVE (N)	WILMINGTON AVE (N)	AC	A	2	1,720	28	49,222	6/17/24	53	46	41	13	New Construction - Initial	1/1/80
1050	13	COMPTON BLVD WB	WILMINGTON AVE (N)	DWIGHT AVE (N)	AC	A	2	1,310	26	34,776	6/17/24	72	38	43	19	New Construction - Initial	1/1/80
1050	14	COMPTON BLVD WB	DWIIGHT AVE (N)	TAJAUTA AVE (N)	AC	A	2	1,320	26	31,059	6/17/24	52	31	68	1	New Construction - Initial	1/1/80
1050	15	COMPTON BLVD WB	TAJAUTA AVE (N)	CENTRAL AVE (N)	AC	A	2	1,640	26	40,375	6/17/24	65	28	66	6	New Construction - Initial	1/1/80
1050	2	COMPTON BLVD WB	CITY LIMITS (E)	HARRIS AVE (S)	AC	A	2	145	38	4,248	6/26/24	54	38	58	4	New Construction - Initial	1/1/80
1050	3	COMPTON BLVD WB	HARRIS AVE (S)	LOCUST AVE (N)	AC	A	2	511	28	17,316	6/26/24	25	43	35	22	New Construction - Initial	1/1/80
1050	4	COMPTON BLVD WB	LOCUST AVE (N)	BRADFORD AVE (N)	AC	A	2	955	32	37,093	6/26/24	27	37	38	25	New Construction - Initial	1/1/80
1050	5	COMPTON BLVD WB	BRADFORD AVE (N)	LONG BEACH BLVD (N)	AC	A	2	1,310	37	51,014	6/26/24	33	51	41	8	New Construction - Initial	1/1/80
1050	6	COMPTON BLVD WB	LONG BEACH BLVD (N)	BURRIS AVE (N)	AAC	A	2	1,070	36	42,999	6/4/24	90	19	0	81	Overlay - AC Structural	12/18/17
1050	7	COMPTON BLVD WB	BURRIS AVE (N)	SANTE FE AVE (N)	AAC	A	2	1,290	38	51,086	6/4/24	94	38	0	62	Overlay - AC Structural	12/18/17
1050	8	COMPTON BLVD WB	SANTE FE AVE (N)	ALAMEDA ST (N)	AAC	A	2	1,270	38	44,841	6/4/24	97	77	0	23	Overlay - AC Structural	12/18/17
1050	9	COMPTON BLVD WB	ALAMEDA ST (N)	WILLOWBROOK AVE (N)	AAC	A	2	1,255	32	35,568	5/30/24	95	61	30	9	Overlay - AC Structural	7/14/20
1240	1	EL SEGUNDO BLVD (W)	CITY LIMITS	PARMELEE AVE (N)	AC	A	2	1,356	30	46,469	5/28/24	70	56	38	6	New Construction - Initial	1/1/80
1240	10	EL SEGUNDO BLVD (W)	COMPTON AVE (N)	END PCC	PCC	A	2	114	30	3,809	5/29/24	79	56	0	44	New Construction - Initial	1/1/80
1240	11	EL SEGUNDO BLVD (W)	END PCC	PARMELEE AVE (N)	AC	A	2	998	30	32,496	5/28/24	73	53	28	19	New Construction - Initial	1/1/80
1240	12	EL SEGUNDO BLVD (W)	PARMELEE AVE (N)	CITY LIMITS	AC	A	2	1,356	30	41,827	5/28/24	61	41	52	7	New Construction - Initial	1/1/80
1240	2	EL SEGUNDO BLVD (W)	PARMELEE AVE (N)	BEGIN PCC	AC	A	2	812	30	27,393	5/28/24	76	66	34	0	New Construction - Initial	1/1/80
1240	3	EL SEGUNDO BLVD (W)	BEGIN PCC	COMPTON AVE (N)	PCC	A	3	300	30	14,338	5/29/24	75	44	18	38	New Construction - Initial	1/1/80
1240	4	EL SEGUNDO BLVD (W)	COMPTON AVE (N)	END PCC	PCC	A	2	114	30	5,431	5/29/24	79	63	0	37	New Construction - Initial	1/1/80
1240	5	EL SEGUNDO BLVD (W)	END PCC	GRANDEE AVE (N)	AC	A	2	823	30	29,420	5/29/24	79	64	36	0	New Construction - Initial	1/1/80
1240	6	EL SEGUNDO BLVD (W)	GRANDEE AVE (N)	WILMINGTON AVE (N)	AC	A	2	1,233	30	43,602	5/29/24	73	49	51	0	New Construction - Initial	1/1/80
1240	7	EL SEGUNDO BLVD (W)	WILMINGTON AVE (N)	GRANDEE AVE (N)	AC	A	2	1,277	30	46,805	5/29/24	73	58	42	0	New Construction - Initial	1/1/80
1240	8	EL SEGUNDO BLVD (W)	GRANDEE AVE (N)	BEGIN PCC	AC	A	2	701	30	25,688	5/29/24	77	54	42	4	New Construction - Initial	1/1/80
1240	9	EL SEGUNDO BLVD (W)	BEGIN PCC	COMPTON AVE (N)	PCC	A	3	236	30	9,761	5/29/24	84	45	18	37	New Construction - Initial	1/1/80
1480	1	GREENLEAF BLVD	CITY LIMIT (W)	NORTHWOOD AVE (S)	AC	C	2	1,167	48	55,891	6/17/24	20	29	67	4	New Construction - Initial	1/1/80
1480	10	GREENLEAF BLVD	LONG BEACH BLVD (S)	MURIEL AVE (S)	AC	C	2	1,271	20	23,896	6/18/24	50	26	74	0	New Construction - Initial	1/1/80
1480	11	GREENLEAF BLVD	MURIEL AVE (S)	BUTLER AVE (S)	AC	C	2	1,253	20	23,083	6/18/24	51	22	73	5	New Construction - Initial	1/1/80
1480	12	GREENLEAF BLVD	BUTLER AVE (S)	ATLANTIC DR (S)	AC	C	2	1,223	20	21,235	6/18/24	33	22	70	8	New Construction - Initial	1/1/80
1480	2	GREENLEAF BLVD	NORTHWOOD AVE (S)	GREENLEAF DR	AC	C	2	1,145	46	54,174	6/17/24	26	33	67	0	New Construction - Initial	1/1/80
1480	3	GREENLEAF BLVD	GREENLEAF DR	WILMINGTON AVE (S)	AC	C	2	1,085	46	47,815	6/17/24	31	35	64	1	New Construction - Initial	1/1/80
1480	4	GREENLEAF BLVD	WILMINGTON AVE (S)	CENTER AVE (S)	AAC	C	3	1,310	60	58,295	6/17/24	80	89	10	1	Overlay - AC Structural	10/16/10
1480	5	GREENLEAF BLVD	CENTER AVE (S)	OLEANDER AVE (S)	AAC	C	3	1,365	60	64,810	6/17/24	79	84	16	0	Overlay - AC Structural	10/16/10
1480	6	GREENLEAF BLVD	OLEANDER AVE (S)	WILLOWBROOK AVE (S)	AAC	C	3	1,345	52	67,552	6/17/24	74	51	49	0	Overlay - AC Structural	10/16/10
1480	7	GREENLEAF BLVD	WILLOWBROOK AVE (S)	ALAMEDA ST (S)	AAC	C	3	1,630	60	76,009	6/17/24	76	91	8	1	Overlay - AC Structural	10/16/10
1480	8	GREENLEAF BLVD	ALAMEDA ST (S)	MAYO AVE (S)	AC	C	2	1,780	55	73,990	6/10/24	41	39	60	1	New Construction - Initial	1/1/80
1480	9	GREENLEAF BLVD	MAYO AVE (S)	345' E of BURRIS AVE (S)	AC	C	2	940	40	37,184	6/10/24	44	48	52	0	New Construction - Initial	1/1/80
3640	1	HARBOR AVE	CITY LIMIT (N)	ARTESIA BLVD (E)	AC	C	2	241	60	7,882	6/25/24	91	52	0	48	New Construction - Initial	1/1/80
1730	2	LAUREL ST (E)	WILLOW AVE (S)	CHESTER AVE (S)	AC	C	2	823	32	22,110	6/10/24	63	56	37	7	Surface Treatment - Slurry Seal	1/19/16
1730	3	LAUREL ST (E)	CHESTER AVE (S)	BURRIS AVE (S)	AC	C	2	990	32	27,144	6/26/24	34	34	66	0	Surface Treatment-Cape Seal	1/19/16
1730	4	LAUREL ST (E)	BURRIS AVE (S)	LONG BEACH BLVD (S)	AC	C	2	1,077	32	31,120	6/26/24	58	37	55	8	Surface Treatment - Slurry Seal	1/19/16
1730	5	LAUREL ST (E)	BULLIS RD (S)	PANNES AVE	AC	C	2	1,156	32	33,644	4/18/24	7	10	89	1	New Construction - Initial	1/1/80
1730	6	LAUREL ST (E)	PANNES AVE (S)	LOCUST AVE (S)	AC	C	2	637	32	16,426	4/18/24	9	8	87	5	New Construction - Initial	1/1/80
1730	7	LAUREL ST (E)	LOCUST AVE (S)	CITY LIMITS	AC	C	2	656	32	13,636	4/18/24	9	6	93	1	New Construction - Initial	1/1/80
3290	5	LAUREL ST (W)	CENTER AVE (S)	WILMINGTON AVE (S)	AAC	C	2	866	32	36,517	4/12/24	52	52	48	0	Overlay - AC Structural	1/18/11
1780	1	LONG BEACH BLVD NB	CITY LIMITS (S)	CALDWELL ST (E)	AC	A	2	1,373	32	45,022	6/25/24	68	56	41	3	New Construction - Initial	1/1/80
1780	2	LONG BEACH BLVD NB	CALDWELL ST (E)	ALONDRA BLVD (E)	AC	A	2	1,387	35	49,428	6/25/24	72	47	42	11	New Construction - Initial	1/1/80
1780	3	LONG BEACH BLVD NB	ALONDRA BLVD (E)	MYRRH ST (E)	AC	A	2	1,363	31	42,531	6/25/24	69	56	32	12	New Construction - Initial	1/1/80
1780	4	LONG BEACH BLVD NB	MYRRH ST (E)	COMPTON BLVD (E)	AC	A	2	1,330	32	41,533	6/25/24	69	50	34	16	New Construction - Initial	1/1/80
1780	5	LONG BEACH BLVD NB	COMPTON BLVD (E)	ELM ST (E)	AC	A	2	1,340	31	38,232	6/19/24	71	54	37	9	New Construction - Initial	1/1/80
1780	6	LONG BEACH BLVD NB	ELM ST (E)	ROSECRANS AVE (E)	AC	A	2	1,360	32	41,843	6/19/24	58	57	27	16	New Construction - Initial	1/1/80
1780	7	LONG BEACH BLVD NB	ROSECRANS AVE (E)	EZMIRLIAN ST (E)	AC	A	2	1,090	34	33,548	6/19/24	61	64	29	7	New Construction - Initial	1/1/80
1780	8	LONG BEACH BLVD NB	EZMIRLIAN ST (E)	ARLINGTON ST (E)	AC	A	2	1,066	34	34,931	6/19/24	57	62	20	18	New Construction - Initial	1/1/80

BranchID	Sec ID	Name	From	To	Surface Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1780	9	LONG BEACH BLVD NB	ARLINGTON ST (E)	CITY LIMITS (N)	AC	A	2	750	32	24,824	6/19/24	60	62	22	16	New Construction - Initial	1/1/80
3510	1	LONG BEACH BLVD SB	CITY LIMITS (N)	ARLINGTON ST (E)	AC	A	2	750	31	23,724	6/19/24	53	44	46	10	New Construction - Initial	1/1/80
3510	2	LONG BEACH BLVD SB	ARLINGTON ST (E)	EZMIRLIAN ST (E)	AC	A	2	1,065	31	35,133	6/19/24	46	53	34	13	New Construction - Initial	1/1/80
3510	3	LONG BEACH BLVD SB	EZMIRLIAN ST (E)	ROSECRANS AVE (E)	AC	A	2	1,090	31	34,395	6/25/24	53	69	30	1	New Construction - Initial	1/1/80
3510	4	LONG BEACH BLVD SB	ROSECRANS AVE (E)	ELM ST (E)	AC	A	2	1,360	28	38,806	6/25/24	58	43	32	25	New Construction - Initial	1/1/80
3510	5	LONG BEACH BLVD SB	ELM ST (E)	COMPTON BLVD (E)	AC	A	2	1,340	28	41,223	6/25/24	62	53	32	15	New Construction - Initial	1/1/80
3510	6	LONG BEACH BLVD SB	COMPTON BLVD (E)	MYRRH ST (E)	AC	A	2	1,330	28	36,739	6/25/24	64	37	61	2	New Construction - Initial	1/1/80
3510	7	LONG BEACH BLVD SB	MYRRH ST (E)	ALONDRA BLVD (E)	AC	A	2	1,365	29	40,386	6/25/24	70	56	44	0	New Construction - Initial	1/1/80
3510	8	LONG BEACH BLVD SB	ALONDRA BLVD (E)	CALDWELL ST (E)	AC	A	2	1,385	34	45,502	6/25/24	67	53	39	8	New Construction - Initial	1/1/80
3510	9	LONG BEACH BLVD SB	CALDWELL ST (E)	CITY LIMITS (S)	AC	A	2	1,375	34	42,070	6/25/24	70	55	35	10	New Construction - Initial	1/1/80
1810	1	MAGNOLIA ST (W)	NESTOR AVE (N)	TAJAUTA AVE (S)	AC	C	2	681	32	23,218	6/5/24	16	3	90	7	New Construction - Initial	1/1/80
1810	2	MAGNOLIA ST (W)	TAJAUTA AVE (S)	MAIE AVE (N)	AC	C	2	699	32	23,095	6/5/24	18	11	82	7	New Construction - Initial	1/1/80
1810	3	MAGNOLIA ST (W)	MAIE AVE (N)	DWIGHT AVE (S)	AC	C	2	659	25	19,746	6/11/24	10	25	68	7	New Construction - Initial	1/1/80
1810	4	MAGNOLIA ST (W)	DWIGHT AVE (N)	KEMP AVE (N)	AC	C	2	670	25	16,933	6/11/24	58	66	5	29	New Construction - Initial	1/1/80
1810	5	MAGNOLIA ST (W)	KEMP AVE (N)	WILMINTON AVE (N)	AC	C	2	657	25	16,249	6/11/24	48	40	26	34	New Construction - Initial	1/1/80
1810	6	MAGNOLIA ST (W)	PAULSEN AVE (N)	MATTHISEN AVE (N)	AC	C	2	557	32	14,125	2/29/24	74	86	0	14	New Construction - Initial	1/1/80
1810	7	MAGNOLIA ST (W)	MATTHISEN AVE (N)	ARANBE AVE	AC	C	2	607	32	15,913	2/29/24	76	100	0	0	New Construction - Initial	1/1/80
1810	8	MAGNOLIA ST (W)	ARANBE AVE (N)	OLEANDER AVE (S)	AC	C	2	945	32	24,707	2/29/24	77	57	26	17	New Construction - Initial	1/1/80
1810	9	MAGNOLIA ST (W)	OLEANDER AVE (S)	ACACIA AVE (S)	AC	C	2	697	32	17,755	2/29/24	86	66	0	34	New Construction - Initial	1/1/80
1820	1	MAHALO PL (W)	CITY LIMITS	MAHALO PL (S)	AC	C	2	1,423	32	59,595	6/11/24	49	53	36	11	New Construction - Initial	1/1/80
1870	1	MANVILLE ST (W)	WILLMINGTON AVE (S)	1400' e/o WILLMINGTON	AC	C	4	1,400	80	80,735	4/5/24	27	31	69	0	New Construction - Initial	1/1/80
1870	2	MANVILLE ST (W)	1400' e/o WILLMINGTON	RR TRACKS	AC	C	4	1,824	57	109,354	4/5/24	16	20	80	0	New Construction - Initial	1/1/80
1870	3	MANVILLE ST (W)	RR TRACKS	ACACIA AVE (S)	AC	C	4	550	57	32,055	4/5/24	18	10	87	3	New Construction - Initial	1/1/80
1870	4	MANVILLE ST (W)	ACACIA AVE (S)	PACIFIC ELECTRIC RR	AC	C	4	920	57	44,600	4/5/24	72	20	75	5	New Construction - Initial	1/1/80
1870	5	MANVILLE ST (W)	PACIFIC ELECTRIC RR	ALAMEDA ST (S)	AC	C	4	1,175	57	55,024	4/5/24	46	12	83	5	New Construction - Initial	1/1/80
1900	1	MATTHISEN AVE (N)	COMPTON BLVD (W)	SCHOOL ST (W)	AC	B	2	627	26	15,469	6/18/24	84	92	8	0	New Construction - Initial	1/1/80
1900	2	MATTHISEN AVE (N)	SCHOOL ST (W)	ARBUTUS ST (W)	AC	B	2	584	26	14,776	6/18/24	85	85	15	0	New Construction - Initial	1/1/80
1900	3	MATTHISEN AVE (N)	ARBUTUS ST (W)	POPLAR ST (W)	AC	B	2	286	26	7,304	6/18/24	37	28	64	8	New Construction - Initial	1/1/80
1900	4	MATTHISEN AVE (N)	POPLAR ST (W)	SPRUCE ST (W)	AC	B	2	953	26	32,111	6/18/24	36	42	58	0	New Construction - Initial	1/1/80
1900	5	MATTHISEN AVE (N)	SPRUCE ST (W)	CHERRY ST (W)	AC	B	2	493	26	11,329	6/18/24	49	36	64	0	New Construction - Initial	1/1/80
1900	6	MATTHISEN AVE (N)	CHERRY ST (W)	CITY LIMITS	AC	B	2	857	26	22,963	6/18/24	65	100	0	0	New Construction - Initial	1/1/80
1970	2	MONA BLVD (N)	MEALY ST (E)	WILLOWBROOK AVE (N)	AC	C	2	524	36	37,486	6/4/24	25	33	63	4	New Construction - Initial	1/1/80
2010	1	MYRRH ST (E)	ALAMEDA ST (S)	WILLOW AVE (S)	AAC	B	2	611	36	21,382	3/7/24	80	42	58	0	Overlay - AC Structural	7/14/20
2010	2	MYRRH ST (E)	WILLOW AVE (S)	CHESTER AVE (S)	AC	B	2	816	36	19,493	3/7/24	77	15	84	1	New Construction - Initial	1/1/80
2010	3	MYRRH ST (E)	CHESTER AVE (S)	BURRIS AVE (S)	AAC	B	2	996	36	24,084	3/7/24	98	82	0	18	Overlay - AC Structural	7/14/20
2010	4	MYRRH ST (E)	BURRIS AVE (S)	LONG BEACH BLVD (S)	AAC	B	2	1,081	36	33,048	3/7/24	98	82	0	18	Overlay - AC Structural	7/14/20
2010	5	MYRRH ST (E)	LONG BEACH BLVD (S)	BULLIS RD (S)	AC	B	2	434	40	13,127	4/18/24	95	77	0	23	New Construction - Initial	1/1/80
2010	6	MYRRH ST (E)	BULLIS RD (S)	BRADFIELD AVE (S)	AAC	B	2	891	40	29,628	4/18/24	82	8	92	0	Overlay - AC Structural	7/14/20
2010	7	MYRRH ST (E)	BRADFIELD AVE (S)	LOCUST AVE (S)	AAC	B	2	942	40	31,342	4/18/24	98	78	0	22	Overlay - AC Structural	7/14/20
2010	8	MYRRH ST (E)	LOCUST AVE (S)	CITY LIMITS (E)	AAC	B	2	831	40	26,244	4/18/24	98	85	0	15	Overlay - AC Structural	7/14/20
2020	1	NESTOR AVE (N)	COMPTON BLVD (W)	PALMER ST (W)	AC	C	2	786	32	25,459	6/5/24	21	32	68	0	New Construction - Initial	1/1/80
2020	2	NESTOR AVE (N)	PALMER ST (W)	POPLAR ST (W)	AC	C	2	708	32	23,773	6/5/24	22	60	40	0	New Construction - Initial	1/1/80
2140	4	PALMER ST (E)	LONG BEACH BLVD (N)	SLOAN AVE (N)	AC	C	4	758	54	40,043	6/4/24	92	100	0	0	New Construction - Initial	1/1/80
2140	5	PALMER ST (E)	SLOAN AVE (N)	PEARL AVE (N)	AC	C	4	985	54	55,615	6/4/24	94	100	0	0	New Construction - Initial	1/1/80
2140	6	PALMER ST (E)	PEARL AVE (N)	WILLOW AVE (N)	AC	C	4	975	58	49,753	6/4/24	92	100	0	0	New Construction - Initial	1/1/80
2140	7	PALMER ST (E)	WILLOW AVE (N)	ALAMEDA ST (N)	AC	C	4	940	58	51,195	6/4/24	94	100	0	0	New Construction - Initial	1/1/80
2140	8	PALMER ST (E)	ALAMEDA ST (N)	ALAMEDA ST (N) w/o RR	PCC	C	4	155	58	4,107	6/25/24	85	49	0	51	New Construction - Initial	1/1/80
2410	1	ROSECRANS AVE EB	CITY LIMITS (W)	CENTRAL AVE (N)	AC	B	3	617	38	22,919	6/19/24	79	32	53	15	New Construction - Initial	1/1/80
2410	10	ROSECRANS AVE EB	WILLOW AVE (N)	MAYO AVE (N)	AC	B	2	1,338	28	36,898	6/28/24	100	0	0	0	New Construction - Initial	1/1/80
2410	11	ROSECRANS AVE EB	MAYO AVE (N)	LONG BEACH BLVD	AC	B	2	1,355	28	42,005	2/29/24	100	0	0	0	New Construction - Initial	1/1/80
2410	12	ROSECRANS AVE EB	LONG BEACH BLVD	BULLIS RD (N)	AC	B	2	385	28	10,729	2/29/24	100	0	0	0	New Construction - Initial	1/1/80
2410	13	ROSECRANS AVE EB	BULLIS RD (N)	BRADFIELD AVE (N)	AC	B	2	830	28	25,497	2/29/24	100	0	0	0	New Construction - Initial	1/1/80
2410	14	ROSECRANS AVE EB	BRADFIELD AVE (N)	HARRIS AVE	AC	B	2	1,524	28	45,835	2/29/24	100	0	0	0	New Construction - Initial	1/1/80
2410	15	ROSECRANS AVE EB	THORSON AVE (N)	CITY LIMIT (E)	AC	B	2	690	30	16,302	6/26/24	100	0	0	0	New Construction - Initial	1/1/80
2410	16	ROSECRANS AVE EB	WEST CITY LIMIT (E/ COOKACRE ST)	EAST CITY LIMIT (W/ ATLANTIC)	AC	B	2	230	36	8,665	6/26/24	100	0	0	0	New Construction - Initial	1/1/80
2410	17	ROSECRANS AVE EB	WEST CITY LIMIT (W/ FRAILEY)	EAST CITY LIMITS (E/ GIBSON)	AC	B	2	750	40	31,578	6/26/24	74	65	34	1	New Construction - Initial	1/1/89
2410	18	ROSECRANS AVE EB	WILLOWBROOK AVE (S)	ALAMEDA ST OVERPASS	AC	B	2	538	25	16,975	6/19/24	56	75	23	2	New Construction - Initial	1/1/80
2410	19	ROSECRANS AVE EB	ROSECRANS AVE (OFF RAMP)	ALAMEDA ST SB	AC	B	2	830	15	12,032	6/4/24	70	60	40	0	New Construction - Initial	1/1/80
2410	2	ROSECRANS AVE EB	CENTRAL AVE (N)	NESTOR AVE (N)	AC	B	3	1,254	37	37,475	6/19/24	76	32	66	2	New Construction - Initial	1/1/80
2410	20	ROSECRANS AVE EB	ALAMEDA ST NB	ROSECRANS AVE (ON RAMP)	AC	B	2	899	15	11,699	6/25/24	59	55	43	2	New Construction - Initial	1/1/80

BranchID	Sec ID	Name	From	To	Surface Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
2410	3	ROSECRANS AVE EB	NESTOR AVE (N)	TAJAUTA AVE (N)	AC	B	2	754	31	23,611	6/19/24	45	14	56	30	New Construction - Initial	1/1/80
2410	4	ROSECRANS AVE EB	TAJAUTA AVE (N)	DWIGHT AVE (N)	AC	B	2	1,344	30	41,647	6/19/24	78	31	58	11	New Construction - Initial	1/1/80
2410	5	ROSECRANS AVE EB	DWIGHT AVE (N)	WILMINGTON AVE (N)	AC	B	2	1,294	30	38,905	6/19/24	71	24	54	22	New Construction - Initial	1/1/80
2410	6	ROSECRANS AVE EB	WILMINGTON AVE (N)	ARANBE AVE (N)	AC	B	2	1,711	29	50,189	6/19/24	60	38	60	2	New Construction - Initial	1/1/80
2410	7	ROSECRANS AVE EB	ARANNBE AVE (N)	ACACIA AVE (N)	AC	B	2	1,476	30	42,719	6/19/24	71	37	56	7	New Construction - Initial	1/1/80
2410	8	ROSECRANS AVE EB	ACACIA AVE (N)	WILLOWBROOK AVE (N)	AC	B	2	630	31	22,799	6/19/24	74	23	57	20	New Construction - Initial	1/1/80
2410	9	ROSECRANS AVE EB	WILLOWBROOK AVE (N)	WILLOW AVE	AC	B	2	672	28	19,235	6/10/24	100	0	0	0	New Construction - Initial	1/1/80
2430	1	ROSECRANS AVE WB	WILLOWBROOK AVE (N)	ACACIA (N)	AC	B	2	630	31	22,078	6/19/24	80	39	46	15	New Construction - Initial	1/1/80
2430	10	ROSECRANS AVE WB	EAST CITY LIMIT (W/ ATLANTIC AVE)	WEST CITY LIMIT (E/ COOKACRE ST)	AC	B	2	1,338	28	7,716	6/26/24	100	0	0	0	New Construction - Initial	1/1/80
2430	11	ROSECRANS AVE WB	CITY LIMITS (E/ BUTLER)	HARRIS AVE	AC	B	2	465	28	14,549	6/26/24	100	0	0	0	New Construction - Initial	1/1/80
2430	12	ROSECRANS AVE WB	HARRIS AVE	BRADFIELD AVE (N)	AC	B	2	1,523	28	45,861	2/29/24	100	0	0	0	New Construction - Initial	1/1/80
2430	13	ROSECRANS AVE WB	BRADFIELD AVE (N)	BULLIS RD (N)	AC	B	2	831	28	26,153	2/29/24	100	0	0	0	New Construction - Initial	1/1/80
2430	14	ROSECRANS AVE WB	BULLIS RD (N)	LONG BEACH BLVD	AC	B	2	384	28	11,759	2/29/24	100	0	0	0	New Construction - Initial	1/1/80
2430	15	ROSECRANS AVE WB	LONG BEACH BLVD	MAYO AVE (N)	AC	B	2	1,346	28	39,880	2/29/24	100	0	0	0	New Construction - Initial	1/1/80
2430	16	ROSECRANS AVE WB	MAYO AVE (N)	SANTA FE AVE	AC	B	2	950	28	27,833	2/29/24	100	0	0	0	New Construction - Initial	1/1/80
2430	17	ROSECRANS AVE WB	SANTA FE AVE	ALAMEDA ST OVERPASS	AC	B	2	981	28	27,011	6/10/24	100	0	0	0	New Construction - Initial	1/1/80
2430	18	ROSECRANS AVE WB	ALAMEDA ST OVERPASS	WILLOWBROOK AVE (S)	AC	B	2	538	25	18,620	6/19/24	44	50	44	6	New Construction - Initial	1/1/80
2430	19	ROSECRANS AVE WB	ROSECRANS AVE (OFF RAMP)	ALAMEDA ST NB	AC	B	2	820	15	9,747	6/25/24	38	27	49	24	New Construction - Initial	1/1/80
2430	2	ROSECRANS AVE WB	ACACIA AVE (N)	ARANBE AVE (N)	AC	B	2	1,476	30	43,856	6/19/24	73	38	25	37	New Construction - Initial	1/1/80
2430	20	ROSECRANS AVE WB	ALAMEDA ST SB	ROSECRANS AVE (ON RAMP)	AC	B	2	830	15	13,062	6/25/24	56	22	48	30	New Construction - Initial	1/1/80
2430	3	ROSECRANS AVE WB	ARANBE AVE (N)	WILMINGTON AVE (N)	AC	B	2	1,711	30	50,058	6/19/24	72	17	79	4	New Construction - Initial	1/1/80
2430	4	ROSECRANS AVE WB	WILMINGTON AVE (N)	DWIGHT AVE (N)	AC	B	2	1,294	30	37,626	6/19/24	62	29	50	21	New Construction - Initial	1/1/80
2430	5	ROSECRANS AVE WB	DWIGHT AVE (N)	TAJAUTA AVE (N)	AC	B	2	1,344	30	38,814	6/19/24	56	21	67	12	New Construction - Initial	1/1/80
2430	6	ROSECRANS AVE WB	TAJAUTA AVE (N)	NESTOR AVE (N)	AC	B	2	754	30	22,262	6/19/24	65	39	61	0	New Construction - Initial	1/1/80
2430	7	ROSECRANS AVE WB	NESTOR AVE (N)	CENTRAL AVE (N)	AC	B	2	1,254	30	45,007	6/19/24	65	24	67	9	New Construction - Initial	1/1/80
2430	8	ROSECRANS AVE WB	CENTRAL AVE (N)	CITY LIMITS (W)	AC	B	3	617	45	22,154	6/19/24	77	41	53	6	New Construction - Initial	1/1/80
2430	9	ROSECRANS AVE WB	EAST CITY LIMITS (E/ GIBSON)	WEST CITY LIMITS (E/ FRAILEY AVE)	AC	B	2	860	28	26,689	6/26/24	54	26	47	27	New Construction - Initial	1/1/80
2510	1	SANTA FE AVE NB	91 FWY BRIDGE	ARTESIA BLVD (E)	AC	A	3	240	57	9,396	6/25/24	35	26	69	5	New Construction - Initial	1/1/80
2510	10	SANTA FE AVE NB	ROSECRANS AVE (E)	TUCKER ST (E)	AAC	A	2	1,350	31	46,038	3/7/24	99	100	0	0	Overlay - AC Structural	10/16/10
2510	11	SANTA FE AVE NB	TUCKER ST (E)	OAKS ST (E)	AAC	A	2	1,050	36	35,951	3/7/24	99	100	0	0	Overlay - AC Structural	10/16/10
2510	12	SANTA FE AVE NB	OAKS ST (E)	CITY LIMITS (N)	AAC	A	2	1,040	36	35,173	3/7/24	99	100	0	0	Overlay - AC Structural	10/16/10
2510	2	SANTA FE AVE NB	ARTESIA BLVD (S)	TARTAR LN (S)	AC	A	2	1,310	57	48,946	3/7/24	84	73	27	0	New Construction - Initial	1/1/80
2510	3	SANTA FE AVE NB	TARTAR LN (S)	GREENLEAF BLVD (S)	AC	A	2	1,280	37	49,371	3/7/24	99	100	0	0	New Construction - Initial	1/1/80
2510	4	SANTA FE AVE NB	GREENLEAF BLVD (E)	CALDWELL ST (E)	AC	A	2	1,360	40	50,826	3/7/24	99	100	0	0	New Construction - Initial	1/1/80
2510	5	SANTA FE AVE NB	CALDWELL ST (E)	ALONDRA BLVD (E)	AC	A	2	1,350	38	51,964	3/7/24	99	100	0	0	New Construction - Initial	1/1/80
2510	6	SANTA FE AVE NB	ALONDRA BLVD (E)	MYRRH ST (E)	AAC	A	2	1,380	27	44,480	3/7/24	99	100	0	0	Overlay - AC Structural	10/16/10
2510	7	SANTA FE AVE NB	MYRRH ST (E)	COMPTON BLVD (E)	AAC	A	2	1,390	40	48,902	3/7/24	99	100	0	0	Overlay - AC Structural	10/16/10
2510	8	SANTA FE AVE NB	COMPTON BLVD (E)	ELM ST (E)	AAC	A	2	1,760	40	58,840	3/7/24	99	100	0	0	Overlay - AC Structural	10/16/10
2510	9	SANTA FE AVE NB	ELM ST (E)	ROSECRANS AVE (E)	AAC	A	2	980	36	32,878	3/7/24	99	100	0	0	Overlay - AC Structural	10/16/10
2500	1	SANTA FE AVE SB	CITY LIMITS (N)	OAKS ST (E)	AAC	A	2	1,040	34	35,421	3/7/24	99	100	0	0	Overlay - AC Structural	10/16/10
2500	10	SANTA FE AVE SB	GREENLEAF BLVD (E)	TARTAR LN	AC	A	2	1,220	36	46,671	3/7/24	99	100	0	0	New Construction - Initial	1/1/80
2500	11	SANTA FE AVE SB	AUTO DRIVE (S)	ARTESIA BLVD (E)	AC	A	2	1,180	32	56,491	3/7/24	63	49	51	0	New Construction - Initial	1/1/80
2500	12	SANTA FE AVE SB	ARTESIA BLVD (E)	CITY LIMIT (S)	AC	A	3	245	42	7,244	6/25/24	38	26	67	7	New Construction - Initial	1/1/80
2500	2	SANTA FE AVE SB	OAKS ST (E)	TUCKER ST (E)	AAC	A	2	1,050	40	36,466	3/7/24	99	100	0	0	Overlay - AC Structural	10/16/10
2500	3	SANTA FE AVE SB	TUCKER ST (E)	ROSECRANS AVE (E)	AAC	A	2	1,350	42	46,939	3/7/24	99	100	0	0	Overlay - AC Structural	10/16/10
2500	4	SANTA FE AVE SB	ROSECRANS AVE (E)	ELM ST (E)	AAC	A	2	954	33	30,843	3/7/24	99	100	0	0	Overlay - AC Structural	10/16/10
2500	5	SANTA FE AVE SB	ELM ST (E)	COMPTON BLVD (E)	AAC	A	2	1,760	36	63,198	3/7/24	78	58	42	0	Overlay - AC Structural	10/16/10
2500	6	SANTA FE AVE SB	COMPTON BLVD (E)	MYRRH ST (E)	AAC	A	2	1,390	39	47,839	3/7/24	99	100	0	0	Overlay - AC Structural	10/16/10
2500	7	SANTA FE AVE SB	MYRRH ST (E)	ALONDRA BLVD (E)	AAC	A	2	1,380	32	45,704	3/7/24	99	100	0	0	Overlay - AC Structural	10/16/10
2500	8	SANTA FE AVE SB	ALONDRA BLVD (E)	CALDWELL ST (E)	AC	A	2	1,360	31	48,867	3/7/24	99	100	0	0	New Construction - Initial	1/1/80
2500	9	SANTA FE AVE SB	CALDWELL ST (E)	GREENLEAF BLVD (E)	AC	A	2	1,360	42	52,306	3/7/24	99	100	0	0	New Construction - Initial	1/1/80
3630	1	SUSANA RD (S)	ARTESIA BLVD (E)	CITY LIMIT (S)	AC	C	4	251	60	10,863	6/25/24	92	51	37	12	Complete Reconstruction - AC	1/1/17
2740	1	TAMARIND AVE	GREENLEAF BLVD (E)	CALDWELL ST (E)	AAC	C	2	1,225	40	42,487	6/12/24	69	85	15	0	Overlay - AC Structural	6/2/10
2740	10	TAMARIND AVE	ROSECRANS AVE (E)	MEALY ST (E)	PCC	C	2	795	40	33,981	6/25/24	34	13	55	32	New Construction - Initial	1/1/80
2740	11	TAMARIND AVE	MEALY ST (E)	AC PAVEMENT (285' S/ ORIS ST)	PCC	C	2	1,140	40	56,654	6/25/24	28	10	69	21	New Construction - Initial	1/1/80
2740	12	TAMARIND AVE	WILLOWBROOK AVE (N)	CARSON PL (E)	AC	C	2	546	30	23,667	6/4/24	38	72	28	0	New Construction - Initial	1/1/80
2740	13	TAMARIND AVE	285' S/ ORIS ST	ORIS ST	AC	C	2	285	54	16,147	6/25/24	9	23	74	3	New Construction - Initial	1/1/80
2740	2	TAMARIND AVE	CLADWELL ST (E)	ALONDRA BLVD (E)	AAC	C	2	1,460	40	52,433	6/12/24	76	91	9	0	Overlay - AC Structural	6/2/10
2740	3	TAMARIND AVE	ALONDRA BLVD (E)	MYRRH ST (E)	AAC	C	2	1,375	40	49,432	6/5/24	73	84	7	9	Overlay - AC Structural	6/2/10
2740	5	TAMARIND AVE	CARSON PL (E)	ELM ST (E)	AC	C	2	995	40	30,641	6/4/24	80	87	0	13	New Construction - Initial	1/1/80

BranchID	Sec ID	Name	From	To	Surface Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
2840	1	VICTORIA ST (W)	WILMINGTON AVE (S)	APRA ST (W)	AC	B	5	1,350	110	81,320	6/11/24	15	25	71	4	New Construction - Initial	1/1/80
2840	2	VICTORIA ST (W)	APRA ST (W)	DOMINGUEZ HILLS DR (S)	AC	B	4	1,515	35	90,529	6/11/24	13	37	59	4	New Construction - Initial	1/1/80
2910	1	WALNUT ST EB	CITY LIMITS (W)	WALNUT PARK DR	AC	C	2	680	24	18,860	6/10/24	18	36	52	12	New Construction - Initial	1/1/80
2910	2	WALNUT ST EB	WALNUT PARK DR	ANDERSON AVE (S)	AC	C	2	1,210	24	35,253	6/10/24	19	22	72	6	New Construction - Initial	1/1/80
2910	3	WALNUT ST EB	ANDERSON AVE (S)	PACIFIC RR TRACKS	AC	C	2	890	24	23,896	6/10/24	14	25	59	16	New Construction - Initial	1/1/80
2910	4	WALNUT ST EB	PACIFIC RR TRACKS	WILMINGTON AVE (S)	AC	C	2	960	24	26,642	6/10/24	9	25	61	14	New Construction - Initial	1/1/80
2910	5	WALNUT ST EB	WILMINGTON AVE (S)	1724' W WILMINGTON AVE (S)	AC	C	2	1,724	24	46,277	6/10/24	19	25	59	16	New Construction - Initial	1/1/80
2910	6	WALNUT ST EB	1724' W WILMINGTON AVE (S)	ACACIA AVE (S)	AC	C	2	1,724	24	49,135	6/10/24	19	35	61	4	New Construction - Initial	1/1/80
3460	1	WALNUT ST WB	ACACIA AVE (S)	1724' E ACACIA AVE (S)	AC	C	2	1,724	23	47,245	6/10/24	19	38	52	10	New Construction - Initial	1/1/80
3460	2	WALNUT ST WB	1724' E ACACIA AVE (S)	WILMINGTON AVE (S)	AC	C	2	1,724	23	48,123	6/10/24	24	36	64	0	New Construction - Initial	1/1/80
3460	3	WALNUT ST WB	WILMINGTON AVE (S)	PACIFIC RR TRACKS	AC	C	2	960	23	24,623	6/10/24	13	29	68	3	New Construction - Initial	1/1/80
3460	4	WALNUT ST WB	PACIFIC RR TRACKS	ANDERSON AVE (S)	AC	C	2	895	23	26,758	6/10/24	15	24	63	13	New Construction - Initial	1/1/80
3460	5	WALNUT ST WB	ANDERSON AVE (S)	WALNUT PARK DR	AC	C	2	1,210	23	32,786	6/10/24	13	23	63	14	New Construction - Initial	1/1/80
3460	6	WALNUT ST WB	WALNUT PARK DR	CITY LIMITS (W)	AC	C	2	685	23	18,728	6/10/24	16	27	56	17	New Construction - Initial	1/1/80
3040	1	WILLOWBROOK AVE (N) SB	CITY LIMITS (N)	DOUGLAS ST (W)	AC	B	2	1,140	29	29,746	6/18/24	47	32	50	18	New Construction - Initial	1/1/80
3040	2	WILLOWBROOK AVE (N) SB	DOUGLAS ST (W)	ROSECRANS AVE (W)	AC	B	2	834	30	21,096	6/18/24	69	49	51	0	New Construction - Initial	1/1/80
3040	3	WILLOWBROOK AVE (N) SB	ROSECRANS AVE (W)	ELM ST (W)	AC	B	2	1,015	25	19,649	6/18/24	43	31	64	5	New Construction - Initial	1/1/80
3040	4	WILLOWBROOK AVE (N) SB	ELM ST (W)	SCHOOL ST (W)	AC	B	2	1,150	26	26,472	6/18/24	77	79	20	1	New Construction - Initial	1/1/80
3040	5	WILLOWBROOK AVE (N) SB	SCHOOL ST (W)	COMPTON BLVD (W)	AC	B	2	582	26	12,333	2/29/24	44	52	45	3	New Construction - Initial	1/1/80
3040	7	WILLOWBROOK AVE (N) SB	MYRRH ST (W)	ALONDRA BLVD (W)	AC	B	2	1,373	27	31,869	6/5/24	68	56	34	10	New Construction - Initial	1/1/80
3040	8	WILLOWBROOK AVE (N) SB	ALONDRA BLVD (W)	TICHENOR ST (W)	AC	B	2	1,238	27	32,734	6/12/24	71	63	37	0	New Construction - Initial	1/1/80
3040	9	WILLOWBROOK AVE (N) SB	TICHENOR ST (W)	GREENLEAF BLVD (W)	AC	B	2	1,535	28	37,736	6/12/24	71	66	34	0	New Construction - Initial	1/1/80
3030	1	WILLOWBROOK AVE (S) NB	GREENLEAF BLVD (W)	JOHNSON ST (E)	AC	B	2	910	30	24,327	6/12/24	68	35	65	0	New Construction - Initial	1/1/80
3030	10	WILLOWBROOK AVE (S) NB	MONA BLVD (N)	CITY LIMITS (N)	AC	B	2	1,942	30	61,678	6/4/24	74	49	51	0	New Construction - Initial	1/1/80
3030	2	WILLOWBROOK AVE (S) NB	JOHNSON ST (E)	TICHENOR ST (E)	AC	B	2	730	30	20,788	6/12/24	67	36	64	0	New Construction - Initial	1/1/80
3030	3	WILLOWBROOK AVE (S) NB	TICHENOR ST (E)	ALONDRA BLVD (W)	AC	B	2	1,110	30	34,628	6/12/24	83	61	39	0	New Construction - Initial	1/1/80
3030	4	WILLOWBROOK AVE (S) NB	ALONDRA BLVD (W)	CYPRESS ST (E)	AC	B	2	575	30	17,254	6/5/24	77	64	36	0	New Construction - Initial	1/1/80
3030	5	WILLOWBROOK AVE (S) NB	CYPRESS ST (E)	MYRRH ST (E)	AC	B	2	780	30	22,080	6/5/24	67	45	55	0	New Construction - Initial	1/1/80
3030	6	WILLOWBROOK AVE (S) NB	MYRRH ST (E)	COMPTON BLVD (W)	AC	B	2	1,365	32	35,675	6/5/24	59	36	58	6	New Construction - Initial	1/1/80
3030	7	WILLOWBROOK AVE (S) NB	COMPTON BLVD (W)	TAMARIND AVE	AC	B	2	735	40	18,665	6/4/24	52	45	54	1	New Construction - Initial	1/1/80
3030	9	WILLOWBROOK AVE (S) NB	ELM ST (E)	ROSECRANS AVE (E)	AC	B	2	990	40	31,918	6/4/24	55	35	58	7	New Construction - Initial	1/1/80
3060	1	WILMINGTON AVE NB	VICTORIA AVE (W)	ELECTRIC FACILITY	AC	A	3	1,177	46	47,520	6/24/24	36	32	68	0	New Construction - Initial	1/1/80
3060	10	WILMINGTON AVE NB	COMPTON BLVD (W)	PALMER ST (W)	AC	A	2	933	36	29,161	6/24/24	33	46	47	7	New Construction - Initial	1/1/80
3060	11	WILMINGTON AVE NB	PALMER ST (W)	POPLAR ST (W)	AC	A	2	612	32	22,744	6/24/24	34	42	50	8	New Construction - Initial	1/1/80
3060	12	WILMINGTON AVE NB	POPLAR ST (W)	ROSECRANS AVE (W)	AC	A	2	1,232	33	47,855	6/24/24	31	33	58	9	New Construction - Initial	1/1/80
3060	13	WILMINGTON AVE NB	ROSECRANS AVE (W)	CRESSEY ST (W)	AC	A	2	758	32	24,002	6/24/24	80	59	41	0	Complete Reconstruction - AC	1/1/17
3060	14	WILMINGTON AVE NB	CRESSEY ST (W)	137TH ST (W)	AC	A	2	799	32	26,362	6/24/24	85	100	0	0	Complete Reconstruction - AC	1/1/17
3060	15	WILMINGTON AVE NB	137TH ST (W)	134TH ST (W)	AC	A	2	1,214	28	41,475	6/24/24	83	100	0	0	Complete Reconstruction - AC	1/1/17
3060	16	WILMINGTON AVE NB	134TH ST (W)	131ST ST (W)	AC	A	2	1,027	28	35,099	6/24/24	83	62	0	38	Complete Reconstruction - AC	1/1/17
3060	17	WILMINGTON AVE NB	131ST ST (W)	EL SEGUNDO BLVD (W)	AC	A	2	1,073	32	38,048	6/24/24	84	57	27	16	Complete Reconstruction - AC	1/1/17
3060	18	WILMINGTON AVE NB	EL SEGUNDO BLVD (W)	CITY LIMITS (N)	AC	A	2	583	30	18,194	6/24/24	26	33	63	4	New Construction - Initial	1/1/80
3060	2	WILMINGTON AVE NB	ELECTRIC FACILITY	91 FWY BRIDGE	AC	A	2	1,051	42	35,072	6/24/24	30	31	51	18	New Construction - Initial	1/1/80
3060	3	WILMINGTON AVE NB	91 FWY BRIDGE	WALNUT ST (W)	AC	A	3	875	36	28,095	6/24/24	30	43	41	16	New Construction - Initial	1/1/80
3060	4	WILMINGTON AVE NB	WALNUT ST (W)	GREENLEAF BLVD (W)	AC	A	3	1,697	34	60,202	6/24/24	36	39	57	4	New Construction - Initial	1/1/80
3060	5	WILMINGTON AVE NB	GREENLEAF BLVD (W)	CALDWELL ST (W)	AC	A	2	1,197	28	30,110	6/24/24	45	40	50	10	New Construction - Initial	1/1/80
3060	6	WILMINGTON AVE NB	CALDWELL ST (W)	ALONDRA BLVD (W)	AC	A	2	1,696	26	44,151	6/24/24	47	45	48	7	New Construction - Initial	1/1/80
3060	7	WILMINGTON AVE NB	ALONDRA BLVD (W)	156TH ST (W)	AC	A	2	1,008	36	35,516	6/24/24	30	45	53	2	New Construction - Initial	1/1/80
3060	8	WILMINGTON AVE NB	156TH ST (W)	LAUREL ST (W)	AC	A	2	570	36	21,318	6/24/24	39	45	55	0	New Construction - Initial	1/1/80
3060	9	WILMINGTON AVE NB	LAUREL ST (W)	COMPTON BLVD (W)	AC	A	2	1,156	36	39,690	6/24/24	34	38	62	0	New Construction - Initial	1/1/80
3070	1	WILMINGTON AVE SB	CITY LIMITS (N)	EL SEGUNDO BLVD (W)	AC	A	2	583	32	21,187	6/24/24	15	29	62	9	New Construction - Initial	1/1/80
3070	10	WILMINGTON AVE SB	COMPTON BLVD (W)	LAUREL ST (W)	AC	A	2	1,156	40	39,493	6/24/24	39	42	48	10	New Construction - Initial	1/1/80
3070	11	WILMINGTON AVE SB	LAUREL ST (W)	156TH ST (W)	AC	A	2	569	36	19,990	6/24/24	34	43	52	5	New Construction - Initial	1/1/80
3070	12	WILMINGTON AVE SB	156TH ST (W)	ALONDRA BLVD (W)	AC	A	2	1,012	36	36,783	6/24/24	29	34	56	10	New Construction - Initial	1/1/80
3070	13	WILMINGTON AVE SB	ALONDRA BLVD (W)	CALDWELL ST (W)	AC	A	2	1,685	31	53,363	6/24/24	71	61	39	0	New Construction - Initial	1/1/80
3070	14	WILMINGTON AVE SB	CALDWELL ST (W)	GREENLEAF BLVD (W)	AC	A	2	1,185	32	32,120	6/24/24	44	32	64	4	New Construction - Initial	1/1/80
3070	15	WILMINGTON AVE SB	GREENLEAF BLVD (W)	WALNUT ST (W)	AC	A	2	1,688	36	60,952	6/24/24	32	49	45	6	New Construction - Initial	1/1/80
3070	16	WILMINGTON AVE SB	WALNUT ST (W)	91 FWY BRIDGE	AC	A	3	875	36	25,583	6/24/24	29	54	38	8	New Construction - Initial	1/1/80
3070	17	WILMINGTON AVE SB	91 FWY BRIDGE	ELECTRIC FACILITY	AC	A	2	1,051	36	32,397	6/24/24	30	39	50	11	New Construction - Initial	1/1/80
3070	18	WILMINGTON AVE SB	ELECTRIC FACILITY	VICTORIA ST (W)	AC	A	2	1,177	40	45,436	6/24/24	32	36	62	2	New Construction - Initial	1/1/80
3070	2	WILMINGTON AVE SB	EL SEGUNDO BLVD (W)	131ST ST (W)	AC	A	2	1,073	28	34,951	6/24/24	83	94	0	6	Complete Reconstruction - AC	1/1/17

BranchID	Sec ID	Name	From	To	Surface Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
3070	3	WILMINGTON AVE SB	131ST ST (W)	134TH ST (W)	AC	A	2	1,027	41	33,814	6/24/24	85	73	0	27	Complete Reconstruction - AC	1/1/17
3070	4	WILMINGTON AVE SB	134TH ST	137TH ST	AC	A	2	1,214	33	43,500	6/24/24	82	86	14	0	Complete Reconstruction - AC	1/1/17
3070	5	WILMINGTON AVE SB	137TH ST	CRESSEY ST (W)	AC	A	2	799	33	27,560	6/24/24	83	84	16	0	Complete Reconstruction - AC	1/1/17
3070	6	WILMINGTON AVE SB	CRESSEY ST (W)	ROSECRANS AVE (W)	AC	A	2	758	33	24,257	6/24/24	82	92	8	0	Complete Reconstruction - AC	1/1/17
3070	7	WILMINGTON AVE SB	ROSECRANS AVE (W)	POPLAR ST (W)	AC	A	2	1,232	33	41,925	6/24/24	40	47	34	19	New Construction - Initial	1/1/80
3070	8	WILMINGTON AVE SB	POPLAR ST (W)	BRAZIL ST (W)	AC	A	2	612	33	20,674	6/24/24	46	33	47	20	New Construction - Initial	1/1/80
3070	9	WILMINGTON AVE SB	BRAZIL ST (W)	COMPTON BLVD (W)	AC	A	2	933	35	31,466	6/24/24	55	33	54	13	New Construction - Initial	1/1/80
								81.5		**14,932,179**							
		Locals															
10	1	127TH PL (W)	DALHART AVE (N)	GRANDEE AVE (N)	AC	E	2	865	27	23,135	5/28/24	59	32	68	0	Surface Treatment - Cape Seal	1/19/16
10	2	127TH PL (W)	GRANDEE AVE (N)	127TH ST (W)	AC	E	2	575	27	15,789	5/28/24	37	27	73	0	Surface Treatment-Cape Seal	1/19/16
20	1	127TH ST (W)	KENESAW AVE (N)	CITY LIMITS	AC	E	2	1,173	27	32,115	5/28/24	45	32	68	0	Surface Treatment-Cape Seal	1/19/16
3090	1	129TH PL (W)	GRANDEE AVE (N)	END	AAC	E	2	544	27	15,129	5/29/24	77	9	91	0	Overlay - AC Structural	1/1/21
30	1	129TH ST (W)	GRANDEE AVE (N)	END	AAC	E	2	581	27	15,510	5/29/24	100	0	0	0	Overlay - AC Structural	1/1/24
40	1	130TH ST (W)	SLATER AVE (N)	COMPTON AVE (N)	AC	E	2	570	36	18,953	5/29/24	13	13	87	0	New Construction - Initial	1/1/80
40	2	130TH ST (W)	COMPTON AVE (N)	GRANDEE AVE (N)	AAC	E	2	950	36	32,735	5/29/24	60	7	71	22	Overlay - AC Structural	7/14/20
40	3	130TH ST (W)	GRANDEE AVE (N)	WILLMINGTON AVE (N)	AAC	E	2	1,213	36	41,477	5/29/24	60	3	97	0	Overlay - AC Structural	7/14/20
40	4	130TH ST (W)	WILLMINGTON AVE (N)	CITY LIMITS	AC	E	2	225	26	5,694	6/24/24	7	39	46	15	New Construction - Initial	1/1/80
50	1	131TH ST (W)	CITY LIMITS	PARMELEE AVE (N)	AAC	E	2	1,152	36	41,062	4/15/24	100	0	0	0	Overlay - AC Structural	1/1/24
50	2	131TH ST (W)	SLATER AVE (M)	COMPTON AVE (N)	AC	E	2	497	26	12,922	5/29/24	41	14	86	0	Surface Treatment - Slurry Seal	1/19/16
50	3	131TH ST (W)	COMPTON AVE (N)	GRANDEE AVE (N)	AC	E	2	953	26	24,468	5/29/24	25	45	51	4	New Construction - Initial	1/1/80
50	4	131TH ST (W)	GRANDEE AVE (N)	WILMINGTON AVE (N)	AC	E	2	1,212	26	31,108	5/29/24	28	48	47	5	New Construction - Initial	1/1/80
50	5	131TH ST (W)	WILMINGTON AVE (N)	END	AAC	E	2	913	26	24,239	5/29/24	60	23	58	19	Overlay - AC Structural	1/18/11
60	1	132ND ST (W)	SALINAS AVE (N)	CENTRAL AVE (N) FRONTAGE RD	AAC	E	2	1,773	33	58,780	5/28/24	94	77	0	23	Overlay - AC Structural	7/14/20
60	2	132ND ST (W)	CENTRAL AVE (S)	PARMELEE AVE (N)	AAC	E	2	1,178	36	40,402	4/15/24	100	0	0	0	Overlay - AC Structural	1/1/24
60	3	132ND ST (W)	SLATER AVE (N)	COMPTON AVE (N)	AC	E	2	461	36	14,897	5/29/24	14	7	85	8	New Construction - Initial	1/1/80
60	4	132ND ST (W)	COMPTON AVE (N)	GRANDEE AVE (N)	AAC	E	2	957	36	25,008	5/29/24	52	9	78	13	Overlay - AC Structural	7/14/20
60	5	132ND ST (W)	GRANDEE AVE (N)	WILMINGTON AVE (N)	AC	E	2	1,210	36	31,762	5/29/24	39	10	86	4	New Construction - Initial	1/1/80
70	1	133RD ST (W)	CENTRAL AVE (N)	PARMELEE AVE (N)	AAC	E	2	1,179	36	40,897	4/15/24	97	0	100	0	Overlay - AC Structural	1/1/24
70	2	133RD ST (W)	PARMELEE AVE (N)	KALSMAN AVE (N)	AAC	E	2	516	36	16,489	4/15/24	100	0	0	0	Overlay - AC Structural	1/1/24
70	3	133RD ST (W)	SLATER AVE (N)	COMPTON AVE (N)	AC	E	2	339	36	8,429	5/29/24	100	0	0	0	New Construction - Initial	1/1/80
70	4	133RD ST (W)	COMPTON AVE (N)	GRANDEE AVE (N)	AAC	E	2	957	36	24,642	5/29/24	99	100	0	0	Overlay - AC Structural	6/13/23
70	5	133RD ST (W)	GRANDEE AVE (N)	WILMINGTON AVE (N)	AAC	E	2	1,208	36	31,472	5/29/24	100	100	0	0	Overlay - AC Structural	6/13/23
80	1	134TH PL (W)	SLATER AVE (N)	GRANDEE AVE (N)	AC	E	2	908	36	23,162	5/29/24	8	19	81	0	New Construction - Initial	1/1/80
80	2	134TH PL (W)	GRANDEE AVE (N)	WILMINGTON AVE (N)	AAC	E	2	1,208	36	32,140	5/29/24	100	100	0	0	Overlay - AC Structural	6/13/23
90	1	134TH ST (W)	SALINAS AVE (N)	BAHAMA AVE (N)	AC	E	2	1,486	36	55,476	5/28/24	20	20	67	13	New Construction - Initial	1/1/80
90	2	134TH ST (W)	CENTRAL AVE (N)	PARMELLE AVE (N)	AC	E	2	1,176	36	41,652	4/15/24	15	25	70	5	New Construction - Initial	1/1/80
90	3	134TH ST (W)	PARMELEE AVE (N)	ELVA AVE (N)	AAC	E	2	786	36	22,077	4/15/24	94	100	0	0	Overlay - AC Structural	7/14/20
90	4	134TH ST (W)	COMPTON AVE (N)	GRANDEE AVE (N)	AC	E	2	956	36	24,246	5/29/24	62	9	66	25	New Construction - Initial	1/1/80
90	5	134TH ST (W)	GRANDEE AVE (N)	WILMINGTON AVE (N)	AAC	E	2	1,208	36	31,203	5/29/24	76	3	97	0	Overlay - AC Structural	7/14/20
90	6	134TH ST (W)	BAHAMA AVE (N)	CENTRAL AVE (S)	AC	E	2	522	36	18,252	5/28/24	77	69	0	31	New Construction - Initial	1/1/80
100	1	135TH ST (W)	CENTRAL AVE (N)	PARMELEE AVE (N)	AC	E	2	1,171	36	39,258	4/15/24	88	100	0	0	New Construction - Initial	1/1/80
100	2	135TH ST (W)	PARMELEE AVE (N)	ELVA AVE (N)	AC	E	2	955	36	24,387	4/15/24	99	48	0	52	New Construction - Initial	1/1/80
110	1	136TH ST (W)	GRAHAM AVE (N)	HOLMES AVE (N)	AC	E	2	294	36	9,791	5/28/24	100	0	0	0	New Construction - Initial	1/1/80
110	2	136TH ST (W)	SLATER AVE (N)	GRANDE AVE	AC	E	2	568	36	18,791	5/28/24	100	0	0	0	New Construction - Initial	1/1/80
110	3	136TH ST (W)	GRANDE AVE	GRAHAM AVE (N)	AC	E	2	294	36	9,692	5/28/24	100	0	0	0	New Construction - Initial	1/1/80
110	4	136TH ST (W)	HOLMES AVE (N)	BANDERA AVE	AC	E	2	277	36	9,567	5/28/24	100	0	0	0	New Construction - Initial	1/1/80
110	5	136TH ST (W)	BANDERA AVE	WILMINGONT AVE (N)	AC	E	2	339	36	10,306	5/28/24	100	0	0	0	New Construction - Initial	1/1/80
110	6	136TH ST (W)	PARMELEE AVE (N)	ELVA AVE (N)	AC	E	2	1,311	36	36,421	4/15/24	8	3	90	7	New Construction - Initial	1/1/80
110	7	136TH ST (W)	CENTRAL AVE (N)	PARMELEE AVE (N)	AC	E	2	1,096	36	31,330	4/15/24	10	3	94	3	New Construction - Initial	1/1/80
120	1	137TH ST (W)	CENTRAL AVE (N)	PARMELEE AVE (N)	AC	E	2	1,087	36	34,923	4/15/24	9	6	92	2	New Construction - Initial	1/1/80
120	2	137TH ST (W)	PARMELEE AVE (N)	TAJAUTA AVE (N)	AC	E	2	1,156	36	33,415	4/15/24	16	7	90	3	New Construction - Initial	1/1/80
120	3	137TH ST (W)	TAJAUTA AVE (N)	ELVA AVE (N)	AC	E	2	355	36	9,216	4/15/24	9	3	89	8	New Construction - Initial	1/1/80
120	4	137TH ST (W)	END	GRANDEE AVE (N)	AC	E	2	317	36	10,565	5/28/24	19	14	86	0	New Construction - Initial	1/1/80
120	5	137TH ST (W)	GRANDEE AVE (N)	GRAHAM AVE (N)	AC	E	2	292	36	9,309	5/28/24	97	100	0	0	New Construction - Initial	1/1/80
120	6	137TH ST (W)	GRAHAM AVE (N)	WILMINGTON AVE (N)	AC	E	2	927	36	28,493	5/28/24	84	23	68	9	New Construction - Initial	1/1/80
120	7	137TH ST (W)	WILMINGTON AVE (N)	ANZAC AVE (N)	AC	E	2	317	36	7,398	6/18/24	89	15	85	0	New Construction - Initial	1/1/80
120	8	137TH ST (W)	ANZAC AVE (N)	GRAPE AVE (N)	AC	E	2	248	36	8,716	6/18/24	85	9	91	0	New Construction - Initial	1/1/80
120	9	137TH ST (W)	GRAPE AVE (N)	PAULSEN AVE (N)	AC	E	2	246	36	6,681	6/18/24	63	5	95	0	New Construction - Initial	1/1/80
130	1	138TH ST (W)	CENTRAL AVE (N)	PARMELEE AVE (N)	AC	E	2	1,027	36	29,451	4/15/24	10	7	83	10	New Construction - Initial	1/1/80

BranchID	Sec ID	Name	From	To	Surface Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
130	2	138TH ST (W)	PARMELEE AVE (N)	TAJAUTA AVE (N)	AC	E	2	1,216	36	33,507	4/15/24	11	8	82	10	New Construction - Initial	1/1/80
130	3	138TH ST (W)	TAJAUTA AVE (N)	ELVA AVE (N)	AC	E	2	530	36	15,705	4/15/24	11	6	70	24	New Construction - Initial	1/1/80
130	4	138TH ST (W)	GRANDEE AVE (N)	KEMP AVE (N)	AC	E	2	1,206	36	48,420	5/28/24	16	10	85	5	New Construction - Initial	1/1/80
130	5	138TH ST (W)	WILMINTON AVE (N)	PAULSEN AVE (N)	AC	E	2	752	36	23,023	6/18/24	33	23	75	2	New Construction - Initial	1/1/80
140	1	139TH ST (W)	KEMP AVE (N)	WILMINGTON AVE (N)	AC	E	2	176	36	3,858	6/18/24	10	26	74	0	New Construction - Initial	1/1/80
140	2	139TH ST (W)	WILMINGTON AVE (N)	PAULSEN AVE (N)	AAC	E	2	641	36	19,564	6/18/24	81	41	47	12	Overlay - AC Structural	11/18/11
150	1	145TH ST (W)	HILLFORD AVE (N)	ALBERTSON AVE (N)	AC	E	2	714	36	18,472	6/3/24	53	35	57	8	Surface Treatment - Slurry Seal	1/19/16
150	2	145TH ST (W)	ALBERTSON AVE (N)	NESTOR AVE (N)	AC	E	2	264	36	6,305	6/3/24	51	42	58	0	Slurry Seal	1/1/15
160	1	149TH ST (E)	CITY LIMITS	CENTRAL AVE (N)	AC	E	2	155	36	4,252	4/16/24	9	3	96	1	New Construction - Initial	1/1/80
170	1	150TH ST (E)	CITY LIMITS	CENTRAL AVE (N)	AC	E	2	158	36	3,759	4/16/24	24	33	67	0	New Construction - Initial	1/1/80
180	1	151ST ST (W)	CENTRAL AVE (S)	NESTOR AVE (S)	AC	E	2	835	36	24,902	6/3/24	40	28	54	18	New Construction - Initial	1/1/80
180	2	151ST ST (W)	NESTOR AVE (S)	TAJAUTA AVE (S)	AC	E	2	796	36	25,057	6/3/24	54	29	39	32	New Construction - Initial	1/1/80
180	3	151ST ST (W)	TAJAUTA AVE (S)	MAIE AVE (N)	AC	E	2	664	36	20,727	6/3/24	65	25	63	12	Complete Reconstruction - AC	3/31/20
180	4	151ST ST (W)	MAIE AVE (N)	DWIGHTAVE (N)	AC	E	2	663	36	20,308	6/3/24	75	40	60	0	Complete Reconstruction - AC	3/31/20
180	5	151ST ST (W)	DWIGHT AVE (N)	KEMP AVE (S)	AAC	E	2	568	36	14,525	6/3/24	41	32	68	0	Surface Treatment - Slurry Seal	1/19/16
190	1	152ND ST (W)	APRILLA AVE (S)	AMANTHA AVE (S)	AC	E	2	1,128	36	30,782	4/5/24	94	62	38	0	Complete Reconstruction - AC	1/1/16
190	2	152ND ST (W)	CENTRAL AVE (S)	NESTOR AVE (S)	AC	E	2	793	36	23,841	6/3/24	63	51	34	15	New Construction - Initial	1/1/80
190	3	152ND ST (W)	NESTOR AVE (S)	TAJAUTA AVE (S)	AC	E	2	803	36	25,231	6/3/24	60	42	37	21	New Construction - Initial	1/1/80
190	4	152ND ST (W)	TAJAUTA AVE (S)	MAIE AVE (N)	AC	E	2	660	36	20,478	6/3/24	82	42	58	0	Complete Reconstruction - AC	3/31/20
190	5	152ND ST (W)	MAIE AVE (N)	DWIGHT AVE (N)	AC	E	2	665	36	20,229	6/3/24	70	28	72	0	Complete Reconstruction - AC	3/31/20
190	6	152ND ST (W)	DWIGHT AVE (N)	KEMP AVE (S)	AAC	E	2	578	36	15,934	6/3/24	55	13	70	17	Overlay - AC Structural	1/18/11
200	1	153RD ST (W)	APRILLA AVE (S)	AMATHA AVE (S)	AC	E	2	1,131	36	29,936	4/5/24	88	33	64	3	Complete Reconstruction - AC	1/1/16
200	2	153RD ST (W)	CENTRAL AVE (S)	NESTOR AVE (S)	AC	E	2	756	36	23,036	6/3/24	73	54	12	34	New Construction - Initial	1/1/80
200	3	153RD ST (W)	NESTOR AVE (S)	TAJAUTA AVE (S)	AC	E	2	800	36	25,031	6/3/24	67	47	35	18	New Construction - Initial	1/1/80
210	1	154TH ST (W)	CITY LIMITS	CASTWELL AVE (S)	AAC	E	2	438	36	14,834	4/5/24	100	0	0	0	Overlay - AC Structural	1/1/24
210	2	154TH ST (W)	CASTWELL AVE (S)	APRILLA AVE (S)	AAC	E	2	580	36	20,291	4/5/24	100	0	0	0	Overlay - AC Structural	1/1/24
210	3	154TH ST (W)	APRILLA AVE (S)	KEENE AVE (S)	AAC	E	2	988	36	31,856	4/5/24	100	0	0	0	Overlay - AC Structural	1/1/24
210	4	154TH ST (W)	KEENE AVE (S)	CENTRAL AVE (S)	AAC	E	2	524	36	16,763	4/5/24	100	0	0	0	Overlay - AC Structural	1/1/24
210	5	154TH ST (W)	CENTRAL AVE (S)	NESTOR AVE (S)	AC	E	2	717	36	21,742	6/3/24	67	58	17	25	New Construction - Initial	1/1/80
210	6	154TH ST (W)	NESTOR AVE (S)	TAJAUTA AVE (S)	AC	E	2	800	36	24,786	6/3/24	47	43	41	16	New Construction - Initial	1/1/80
210	7	154TH ST (W)	TAJAUTA AVE (S)	DWIGHT AVE (S)	AAC	E	2	1,031	36	39,611	5/30/24	55	42	58	0	Overlay - AC Structural	6/2/10
220	1	155TH ST (W)	CENTRAL AVE (S)	NESTOR AVE (N)	AC	E	2	676	36	15,515	6/3/24	65	39	34	27	New Construction - Initial	1/1/80
220	2	155TH ST (W)	NESTOR AVE (N)	TAJAUTA AVE (N)	AC	E	2	811	36	25,357	6/3/24	56	49	26	25	New Construction - Initial	1/1/80
230	1	156TH ST (W)	CLYMAR AVE (S)	CORLETT AVE	AC	E	2	1,186	36	32,474	4/16/24	25	22	69	9	New Construction - Initial	1/1/80
230	2	156TH ST (W)	CORLETT AVE	CENTRAL AVE (S)	AC	E	2	1,206	36	34,761	4/16/24	41	17	80	3	New Construction - Initial	1/1/80
230	3	156TH ST (W)	CENTRAL AVE (S)	TAJAUTA AVE (S)	AC	E	2	1,453	36	51,769	4/5/24	51	28	72	0	Surface Treatment - Slurry Seal	1/19/16
230	4	156TH ST (W)	TAJAUTA AVE (S)	DWIGHT AVE (S)	AC	E	2	1,320	36	47,812	4/5/24	67	47	46	7	New Construction - Initial	1/1/80
230	5	156TH ST (W)	DWIGHT AVE (S)	WILMINGTON AVE (N)	AC	E	2	1,324	36	46,595	4/5/24	59	53	47	0	New Construction - Initial	1/1/80
240	1	157TH ST (W)	KEENE AVE (S)	AMANTHA AVE (S)	AAC	E	2	473	36	17,914	4/5/24	100	0	0	0	Overlay - AC Structural	1/1/24
250	1	158TH ST (W)	KEENE AVE (S)	AMANTHA AVE (S)	AAC	E	2	483	36	13,254	4/5/24	100	0	0	0	Overlay - AC Structural	1/1/24
260	1	159TH ST (W)	KEENE AVE (S)	CENTRAL AVE (S)	AAC	E	2	656	36	21,768	4/5/24	100	0	0	100	Overlay - AC Structural	1/1/24
270	1	163RD ST (W)	HILLFORD AVE (S)	NORTHWOOD AVE (S)	AC	E	2	1,195	36	44,558	4/12/24	17	5	95	0	New Construction - Initial	1/1/80
280	1	165TH ST (W)	HILLFORD AVE (S)	NORTHWOOD AVE (S)	AC	E	2	1,131	36	33,974	4/12/24	10	35	65	0	New Construction - Initial	1/1/80
290	1	166TH ST (W)	HILLFORD AVE (S)	NORTHWOOD AVE (S)	AC	E	2	1,131	36	35,051	4/12/24	15	10	82	8	New Construction - Initial	1/1/80
3660	1	72ND ST (E)	CITY LIMIT (E)	END (W)	AC	O	2	126	14	3,649	6/26/24	17	66	34	0	New Construction - Initial	1/1/80
300	1	ACACIA AVE	APRA ST (W)	MANVILLE ST (W)	AC	I	2	775	40	34,584	6/11/24	6	34	60	6	New Construction - Initial	1/1/80
300	10	ACACIA AVE	COMPTON BLVD (W)	ARBUTUS ST (W)	AC	E	2	1,295	33	32,465	6/17/24	83	65	20	15	New Construction - Initial	1/1/80
300	11	ACACIA AVE	ARBUTUS ST (W)	CEDAR ST (W)	AC	E	2	780	33	20,758	6/17/24	79	73	27	0	New Construction - Initial	1/1/80
300	12	ACACIA AVE	CEDAR ST (W)	ROSECRANS AVE (W)	AC	E	2	765	33	22,427	6/17/24	69	57	39	4	New Construction - Initial	1/1/80
300	13	ACACIA AVE	ROSECRANS AVE (W)	DOUGLAS ST (W)	AC	E	2	525	40	17,239	6/4/24	77	54	46	0	New Construction - Initial	1/1/80
300	14	ACACIA AVE	DOUGLAST ST (W)	WINONA AVE (W)	AC	E	2	850	40	30,906	6/4/24	76	52	48	0	New Construction - Initial	1/1/80
300	15	ACACIA AVE	WINONA AVE (W)	END (N)	AC	E	2	230	18	6,905	6/4/24	78	65	35	0	New Construction - Initial	1/1/80
300	3	ACACIA AVE	WALNUT ST (W)	RR TRACKS	AC	I	2	710	44	26,201	6/10/24	18	21	79	0	New Construction - Initial	1/1/80
300	4	ACACIA AVE	RR TRACKS	CAROB ST (W)	AC	I	2	225	44	8,266	6/10/24	46	33	67	0	New Construction - Initial	1/1/80
300	5	ACACIA AVE	GREENLEAF BLVD (W)	BENNETT ST (W)	AAC	E	2	515	33	14,658	6/12/24	26	16	78	6	Overlay - AC Structural	6/21/16
300	6	ACACIA AVE	JOHNSON ST (W)	CLAUDE ST (W)	AAC	E	2	1,018	36	29,830	6/12/24	90	14	86	0	Overlay - AC Structural	7/14/20
300	7	ACACIA AVE	CLAUDE ST (W)	ALONDRA BLVD (W)	AAC	E	2	913	36	32,246	6/12/24	71	78	22	0	Overlay - AC Structural	7/14/20
3480	1	ACACIA CT	ACACIA AVE (S)	END (W)	AC	I	2	285	40	13,674	6/10/24	52	48	52	0	New Construction - Initial	1/1/80
310	1	ADANA ST (E)	BUTLER AVE (S)	STONEACRE AVE (S)	AAC	E	2	520	36	13,687	6/18/24	63	22	78	0	Slurry Seal	5/1/16
320	1	ALAMEDA ST NB	END (S)	AUTO DR (S)	AC	I	2	715	33	21,050	6/24/24	80	75	25	0	New Construction - Initial	1/1/80

BranchID	Sec ID	Name	From	To	Surface Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
320	2	ALAMEDA ST NB	AUTO DR (S)	GREENLEAF BLVD (E)	AC	I	2	1,395	42	49,826	6/24/24	70	60	30	10	New Construction - Initial	1/1/80
360	1	ALBERTSON AVE (S)	SPRUCE ST (W)	145TH ST (W)	AAC	E	2	564	36	15,908	6/3/24	100	0	0	0	Overlay - AC Structural	3/1/24
360	2	ALBERTSON AVE (S)	ARBUTUS ST (W)	PALMER ST (W)	AAC	E	2	517	36	12,779	6/5/24	66	11	89	0	Overlay - AC Structural	7/14/20
370	1	ALHAMBRA AVE	POPPY AVE (N)	ARLINGTON ST (E)	AC	E	2	951	16	15,884	6/19/24	34	36	63	1	New Construction - Initial	1/1/80
370	2	ALHAMBRA AVE	ARLINGTON ST (E)	END (N)	AC	E	2	911	14	12,507	6/19/24	17	34	54	12	New Construction - Initial	1/1/80
3450	1	ALLEY SAN MARCUS	END (W)	CITY LIMITS (E)	AC	O	1	1,240	15	11,745	12/8/20	42	61	32	7	New Construction - Initial	1/1/80
400	1	ALMOND ST (W)	DWIGHT AVE (S)	DWIGHT AVE (N)	AC	E	2	287	36	9,321	5/30/24	67	39	61	0	New Construction - Initial	1/1/80
400	2	ALMOND ST (W)	DWIGHT AVE (N)	KEMP AVE (S)	AAC	E	2	986	36	30,512	5/30/24	56	17	83	0	Overlay - AC Structural	1/18/11
400	3	ALMOND ST (W)	GRAPE AVE (S)	SHERER PL (S)	AC	E	2	742	36	23,315	6/3/24	49	36	64	0	New Construction - Initial	1/1/80
400	4	ALMOND ST (W)	MATTHISEN AVE (S)	BARRON AVE (S)	AC	E	2	533	36	15,756	6/5/24	87	79	18	3	New Construction - Initial	1/1/80
400	5	ALMOND ST (W)	BARRON ST (S)	OLEANDER AVE (N)	AC	E	2	691	36	24,185	6/5/24	68	72	27	1	New Construction - Initial	1/1/80
400	6	ALMOND ST (W)	OLEANDER AVE (N)	END	AC	E	2	598	36	21,622	6/5/24	46	23	66	11	New Construction - Initial	1/1/80
460	1	AMANTHA AV	COMPTON BLVD (W)	152ND ST (W)	AC	E	2	619	36	19,336	4/5/24	92	100	0	0	Complete Reconstruction - AC	1/1/17
460	2	AMANTHA AV	152ND ST (W)	154TH ST (W)	AC	E	2	624	36	20,471	4/5/24	94	100	0	0	Complete Reconstruction - AC	1/1/17
460	3	AMANTHA AV	154TH ST (W)	156TH ST (W)	AAC	E	2	434	36	12,523	4/5/24	100	0	0	100	Overlay - AC Structural	1/1/24
460	4	AMANTHA AV	156TH ST (W)	159TH ST (W)	AAC	E	2	728	36	24,214	4/5/24	100	0	0	0	Overlay - AC Structural	1/1/24
460	5	AMANTHA AV	REEVE ST (W)	CALDWELL ST (W)	AC	E	2	1,136	30	34,304	4/16/24	51	42	58	0	Surface Treatment - Slurry Seal	1/19/16
470	1	ANDERSON AVE (S)	END	WALNUT ST (W)	AC	E	2	1,273	36	52,871	6/11/24	29	22	56	22	New Construction - Initial	1/1/80
470	2	ANDERSON AVE (S)	WALNUT ST (W)	ARTESIA BLVD (W)	AC	E	2	727	36	24,806	6/11/24	38	58	42	0	New Construction - Initial	1/1/80
480	1	ANZAC AVE (N)	131ST ST (W)	NORD ST (W)	AAC	E	2	815	36	21,915	6/18/24	81	48	25	27	Overlay - AC Structural	1/18/11
480	2	ANZAC AVE (N)	NORD ST (W)	STOCKWELL ST (W)	AAC	E	2	742	36	20,245	6/18/24	68	32	43	25	Overlay - AC Structural	1/18/11
480	3	ANZAC AVE (N)	STOCKWELL ST (W)	137TH ST (W)	AAC	E	2	637	36	18,543	6/18/24	82	48	52	0	Overlay - AC Structural	1/18/11
480	4	ANZAC AVE (N)	CYPRESS ST (W)	END (N)	AC	E	2	211	39	8,092	4/12/24	61	73	26	1	New Construction - Initial	1/1/80
3600	1	APRA ST (W)	VICTORIA ST (W)	RR TRACKS	AC	I	4	1,595	60	95,343	6/11/24	29	47	47	6	New Construction - Initial	1/1/80
3600	2	APRA ST (W)	RR TRACKS	ACACIA AVE (S)	AC	I	3	730	60	37,493	6/11/24	32	54	46	0	New Construction - Initial	1/1/80
490	1	APRILIA AVE (S)	BENNETT ST (W)	CLAUDE ST (W)	AC	E	2	713	36	19,920	4/16/24	35	21	78	1	New Construction - Initial	1/1/80
490	2	APRILIA AVE (S)	CLAUDE ST (W)	ALONDRA BLVD	AAC	E	2	888	36	24,183	4/16/24	79	14	84	2	Overlay - AC Structural	6/21/16
490	3	APRILIA AVE (S)	ALONDRA BLVD (W)	156TH ST (W)	AC	E	2	1,738	36	49,270	4/16/24	89	49	51	0	Complete Reconstruction - AC	5/1/15
490	4	APRILIA AVE (S)	154TH ST (W)	COMPTON BLVD (W)	AC	E	2	1,250	36	40,074	4/5/24	90	77	23	0	Complete Reconstruction - AC	1/1/17
500	1	ARANBE AVE	COCOA ST (W)	CYPRESS ST (W)	AC	E	2	265	32	8,876	6/3/24	52	38	62	0	Surface Treatment-Cape Seal	1/19/16
500	2	ARANBE AVE	CYPRESS ST (W)	WINDIGO ST	AC	E	2	635	34	19,175	6/3/24	48	43	56	1	New Construction - Initial	1/1/80
500	3	ARANBE AVE	COMPTON BLVD (W)	PALMER ST (W)	AC	E	2	915	26	22,104	6/17/24	64	32	33	35	New Construction - Initial	1/1/80
500	4	ARANBE AVE	PALMER ST (W)	ELM ST (W)	AC	E	2	813	26	20,375	6/17/24	63	63	0	37	New Construction - Initial	1/1/80
500	5	ARANBE AVE	ELM ST (W)	ROSECRANS AVE (W)	AC	E	2	930	34	26,630	6/17/24	61	75	16	9	New Construction - Initial	1/1/80
500	6	ARANBE AVE	ROSECRANS AVE (W)	CRESSEY ST (W)	AC	E	2	722	29	17,162	6/18/24	72	49	48	3	New Construction - Initial	1/1/80
500	7	ARANBE AVE	CRESSEY ST (W)	CITY LIMITS (N)	AC	E	2	574	26	14,825	6/18/24	79	66	31	3	New Construction - Initial	1/1/80
3100	1	ARBUTUS ST (E)	TAMARIND AVE (N)	ALAMEDA ST (N)	AAC	E	2	421	36	9,272	6/4/24	65	46	51	3	Overlay - AC Structural	1/18/11
3100	2	ARBUTUS ST (E)	END	ROSE AVE (N)	AC	E	2	137	36	2,923	6/10/24	78	80	20	0	New Construction - Initial	1/1/80
510	1	ARBUTUS ST (W)	HILLFORD AVE (N)	NESTOR AVE (N)	AC	E	2	912	36	25,565	6/5/24	57	82	17	1	New Construction - Initial	1/1/80
510	2	ARBUTUS ST (W)	TAJAUTA AVE (N)	BROADACRES AVE (N)	AC	E	2	972	36	31,384	5/30/24	37	35	63	2	New Construction - Initial	1/1/80
510	3	ARBUTUS ST (W)	BROADACRES AVE (N)	END	AC	E	2	1,204	36	31,616	5/30/24	20	22	65	13	New Construction - Initial	1/1/80
510	4	ARBUTUS ST (W)	END	MATTHISEN AVE (N)	AC	E	2	1,424	36	37,219	2/29/24	66	30	65	5	Slurry Seal	1/1/15
510	5	ARBUTUS ST (W)	MATTHISEN AVE (N)	OLEANDER AVE (N)	AC	E	2	1,298	36	34,617	2/29/24	78	71	29	0	Surface Treatment - Slurry Seal	1/19/16
510	6	ARBUTUS ST (W)	OLEANDER AVE (N)	ACACIA AVE (N)	AC	E	2	913	36	25,152	2/29/24	78	87	13	0	Surface Treatment - Slurry Seal	1/19/16
520	1	ARLINGTON ST (E)	ALHAMBRA AVE (N)	SHORT AVE (N)	AC	E	2	869	36	23,899	6/19/24	74	49	36	15	Surface Treatment - Slurry Seal	1/19/16
520	2	ARLINGTON ST (E)	SHORT AVE (N)	LONG BEACH BLVD (N)	AC	E	2	816	36	21,097	6/19/24	61	61	28	11	Surface Treatment - Slurry Seal	1/19/16
570	1	ATLANTIC DR	ATLANTIC AVE (S)	CALDWELL ST (E)	AC	E	2	806	34	21,176	6/18/24	93	41	0	59	Complete Reconstruction - AC	5/1/16
570	2	ATLANTIC DR	CALDWELL ST (E)	GREENLEAF BLVD (E)	AC	E	2	1,330	34	35,587	6/18/24	92	72	0	28	Complete Reconstruction - AC	5/1/16
590	1	AUTO CENTER DR	AUTO DR (S)	END (S)	AC	I	2	395	59	21,746	6/24/24	70	70	30	0	New Construction - Initial	1/1/80
600	1	AUTO DR (S)	ALAMEDA ST (S)	SANTE FE AVE (S)	AC	I	2	583	30	36,502	6/24/24	57	69	31	0	New Construction - Initial	1/1/80
610	1	BAHAMA AVE (N)	132ND ST (N)	134TH ST (N)	AC	E	2	698	36	16,634	5/28/24	69	23	46	31	New Construction - Initial	1/1/80
610	2	BAHAMA AVE (N)	134TH ST (W)	LITTLETON ST	AC	E	2	344	36	9,114	5/28/24	68	28	46	26	New Construction - Initial	1/1/80
620	1	BALES ST	BRADFIELD AVE (N)	HOLLY AVE (N)	AC	E	2	495	36	12,598	6/4/24	95	100	0	0	Complete Reconstruction - AC	3/31/20
620	2	BALES ST	LOCUST AVE (N)	CITY LIMITS	AC	E	2	497	36	13,597	6/4/24	20	12	67	21	New Construction - Initial	1/1/80
630	1	BANDERA ST	STOCKWELL ST (W)	136TH ST (W)	AC	E	2	375	36	9,786	5/28/24	56	28	43	29	Surface Treatment - Slurry Seal	1/19/16
640	1	BANNING ST	SOUTH PACIFIC RR	CITY LIMITS	AC	E	2	1,637	36	55,937	6/24/24	8	34	50	16	New Construction - Initial	1/1/80
650	1	BARCLAY AVE (S)	156TH ST (W)	CYPRESS ST (W)	AC	E	2	1,175	36	41,929	6/3/24	25	22	78	0	New Construction - Initial	1/1/80
660	1	BARRON AVE (S)	END	CYPRESS ST (W)	AC	E	2	243	36	11,214	6/3/24	36	33	67	0	New Construction - Initial	1/1/80
660	2	BARRON AVE (S)	ALMOND ST (W)	LAUREL ST (W)	AC	E	2	445	36	12,608	6/5/24	62	5	78	17	Surface Treatment - Slurry Seal	1/19/16
660	3	BARRON AVE (S)	COMPTON BLVD (W)	ALMOND ST (W)	AC	E	2	619	36	15,356	6/5/24	43	8	84	8	New Construction - Initial	1/1/80

BranchID	Sec ID	Name	From	To	Surface Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
660	4	BARRON AVE (S)	CYPRESS ST (W)	COCOA ST (W)	AC	E	2	306	33	11,596	6/3/24	61	60	40	0	Surface Treatment-Cape Seal	1/19/16
670	1	BELHAVEN AV	132ND ST (W)	KEENE AVE (N)	AC	E	2	933	36	24,779	5/28/24	69	39	31	30	New Construction - Initial	1/1/80
680	1	BENNETT ST (E)	WILLOWBROOK AVE (S)	ALAMEDA ST (S)	AC	E	2	1,466	36	37,416	6/12/24	65	46	52	2	New Construction - Initial	1/1/80
680	10	BENNETT ST (E)	OLEANDER AVE (S)	ACACIA AVE (S)	AC	E	2	652	40	21,375	6/12/24	53	38	62	0	New Construction - Initial	1/1/80
680	11	BENNETT ST (E)	END (W)	WILLOWBROOK AVE (S)	AAC	E	2	655	40	17,737	6/12/24	97	57	0	43	Overlay - AC Structural	6/13/23
680	2	BENNETT ST (E)	CHESTER AVE (S)	BURRIS AVE (S)	AC	E	2	1,149	36	30,850	6/3/24	15	22	68	10	New Construction - Initial	1/1/80
680	3	BENNETT ST (E)	BURRIS AVE (S)	CITY LIMITS	AC	E	2	1,629	36	42,941	6/3/24	18	23	62	15	Complete Reconstruction - AC	1/1/17
680	4	BENNETT ST (E)	MCKINLEY AVE	WADSWORTH AVE (S)	AC	E	2	1,285	38	43,275	4/5/24	32	28	68	4	New Construction - Initial	1/1/80
680	5	BENNETT ST (E)	APRILLA AVE (S)	END (E)	AC	E	2	380	28	11,814	4/16/24	14	3	84	13	New Construction - Initial	1/1/80
680	6	BENNETT ST (E)	HARLAN AVE (S)	NORTHWOOD AVE (S)	AC	E	2	255	32	9,032	4/12/24	19	12	79	9	New Construction - Initial	1/1/80
680	7	BENNETT ST (E)	NORTHWOOD AVE (S)	GRANDE AVE (S)	AC	E	2	705	32	23,921	4/12/24	19	4	92	4	New Construction - Initial	1/1/80
680	8	BENNETT ST (E)	WILMINGTON AVE (S)	CENTER AVE (S)	AC	E	2	1,280	30	38,239	6/12/24	34	26	47	27	New Construction - Initial	1/1/80
680	9	BENNETT ST (E)	CENTER AVE (S)	OLEANDER AVE (S)	AC	E	2	1,355	32	43,764	6/12/24	45	37	48	15	New Construction - Initial	1/1/80
690	1	BENTLEY AVE (S)	BENNET ST (E)	GREENLEAF BLVD (E)	AC	E	2	537	36	13,275	6/12/24	66	31	69	0	New Construction - Initial	1/1/80
700	1	BILLINGS ST (W)	MCKINLEY AVE	WADSWORTH AVE (S)	AC	E	2	1,327	36	49,071	4/16/24	21	11	84	5	New Construction - Initial	1/1/80
710	1	BLISS ST (W)	PAULSEN AVE (N)	END	AC	E	2	89	36	1,913	6/18/24	16	3	97	0	Slurry Seal	1/1/15
720	1	BOWEN AVE (N)	ELM ST (E)	PALMER ST (E)	PCC	E	0	497	28	14,308	6/17/24	23	7	68	25	New Construction - Initial	1/1/80
720	2	BOWEN AVE (N)	PALMER ST (E)	COMPTON BLVD (E)	PCC	E	0	775	28	22,859	6/17/24	24	7	59	34	New Construction - Initial	1/1/80
720	3	BOWEN AVE (N)	END (N)	END (S)	AC	E	2	264	24	7,493	4/18/24	59	61	39	0	New Construction - Initial	1/1/80
720	4	BOWEN AVE (N)	END (N)	CYPRESS ST (E)	AC	E	2	276	32	7,938	4/18/24	17	20	80	0	New Construction - Initial	1/1/80
720	5	BOWEN AVE (N)	CYPRESS ST (E)	ALONDRA BLVD (E)	AC	E	2	708	32	22,372	4/18/24	9	18	82	0	New Construction - Initial	1/1/80
750	1	BRADFIELD AVE (S)	COMPTON BLVD (E)	LAUREL ST (E)	AC	E	2	676	36	17,492	4/18/24	21	9	91	0	New Construction - Initial	1/1/80
750	2	BRADFIELD AVE (S)	LAUREL ST (E)	MYRRTH ST (E)	AC	E	2	670	36	18,977	4/18/24	29	7	90	3	New Construction - Initial	1/1/80
750	3	BRADFIELD AVE (S)	MYRRTH ST (E)	CYPRESS ST (E)	AC	E	2	658	36	18,547	4/18/24	47	46	52	2	New Construction - Initial	1/1/80
750	4	BRADFIELD AVE (S)	CYPRESS ST (E)	CITY LIMITS	AC	E	2	846	36	22,355	4/18/24	43	17	74	9	Cape Seal	1/1/15
760	1	BRAZIL ST (W)	CENTRAL AVE (N)	ALBERTSON AVE (N)	AC	E	2	805	36	20,399	6/5/24	18	17	83	0	New Construction - Initial	1/1/80
760	2	BRAZIL ST (W)	TAJAUTA AVE (N)	MAIE AVE (N)	AC	E	2	740	36	21,112	6/5/24	63	55	45	0	New Construction - Initial	1/1/80
760	3	BRAZIL ST (W)	BROADACRES AVE (N)	DWIGHT AVE (N)	AC	E	2	355	36	8,946	6/11/24	53	21	54	25	Surface Treatment - Slurry Seal	1/19/16
760	4	BRAZIL ST (W)	DWIGHT AVE (N)	KEMP AVE (N)	AC	E	2	670	36	16,861	6/11/24	53	23	50	27	Surface Treatment - Slurry Seal	1/19/16
760	5	BRAZIL ST (W)	KEMP AVE (N)	END	AC	E	2	305	36	7,884	6/11/24	21	19	66	15	New Construction - Initial	1/1/80
760	6	BRAZIL ST (W)	END	WILMINGTON AVE (N)	AC	E	2	198	36	4,783	6/11/24	19	13	64	23	New Construction - Initial	1/1/80
770	1	BROADACRES AVE (N)	SPRUCE ST (W)	POPLAR ST (W)	AC	E	2	986	36	25,393	5/30/24	15	17	80	3	New Construction - Initial	1/1/80
770	2	BROADACRES AVE (N)	ARBUTUS ST (W)	MAGNOLIA ST (W)	AC	E	2	1,017	36	33,746	6/11/24	11	18	82	0	New Construction - Initial	1/1/80
3110	1	BROADACRES AVE (S)	BENNETT ST (W)	CALDWELL ST (W)	AC	E	2	947	36	24,948	4/12/24	22	5	94	1	New Construction - Initial	1/1/80
3110	2	BROADACRES AVE (S)	CALDWELL ST (W)	END	AC	E	2	382	36	10,182	4/12/24	13	3	95	2	New Construction - Initial	1/1/80
790	1	BULLIS RD (N)	CITY LIMITS	ORCHARD ST (E)	AC	E	2	567	36	25,742	4/17/24	95	100	0	0	New Construction - Initial	1/1/80
790	2	BULLIS RD (N)	ORCHARD ST (E)	PINE ST (E)	AC	E	2	766	36	38,810	4/17/24	92	100	0	0	New Construction - Initial	1/1/80
790	3	BULLIS RD (N)	PINE ST (E)	TUCKER ST (E)	AC	E	2	771	36	38,553	4/17/24	94	90	0	10	New Construction - Initial	1/1/80
790	4	BULLIS RD (N)	TUCKER ST (E)	QUEENSDALE ST (E)	AC	E	2	631	36	32,425	4/17/24	95	100	0	0	New Construction - Initial	1/1/80
790	5	BULLIS RD (N)	QUEENSDALE ST (E)	ROSECRANS AVE (E)	AC	E	2	651	36	30,884	4/17/24	93	63	0	37	New Construction - Initial	1/1/80
790	6	BULLIS RD (N)	ROSECRANS AVE (E)	PATTIE CT (E)	AC	E	2	1,123	36	51,075	6/17/24	93	56	0	44	New Construction - Initial	1/1/80
790	7	BULLIS RD (N)	PATTIE CT (E)	COMPTON BLVD (E)	AC	E	2	1,583	36	81,208	6/17/24	93	70	0	30	New Construction - Initial	1/1/80
780	1	BULLIS RD (S)	COMPTON BLVD (E)	MYRRTH ST (E)	AC	E	2	1,340	36	49,243	4/18/24	97	72	0	28	New Construction - Initial	1/1/80
780	2	BULLIS RD (S)	MYRRH ST (E)	CYPRESS ST (E)	AC	E	2	657	36	22,077	4/18/24	97	60	0	40	New Construction - Initial	1/1/80
780	3	BULLIS RD (S)	CYPRESS ST (E)	CITY LIMITS	AC	E	2	847	36	34,949	4/18/24	97	69	0	31	Cape Seal	1/1/15
800	1	BURRIS AVE (N)	ROSECRANS AVE	ELM ST (E)	AC	E	2	964	36	23,991	6/25/24	86	77	23	0	New Construction - Initial	1/1/80
800	2	BURRIS AVE (N)	ELM ST (E)	PALMER ST (E)	AAC	E	2	887	36	23,246	6/10/24	100	0	0	0	Overlay - AC Structural	6/13/23
800	3	BURRIS AVE (N)	PALMER ST (E)	COMPTON BLVD (E)	AC	E	2	842	36	20,822	6/25/24	30	27	52	21	New Construction - Initial	1/1/80
3120	1	BURRIS AVE (S)	COMPTON BLVD (E)	LAUREL ST (E)	AC	E	2	679	36	16,740	6/3/24	68	74	26	0	Surface Treatment - Slurry Seal	1/19/16
3120	2	BURRIS AVE (S)	LAUREL ST (E)	MYRRH ST (E)	AC	E	2	671	36	18,246	6/3/24	73	71	27	2	Surface Treatment - Slurry Seal	1/19/16
3120	3	BURRIS AVE (S)	MYRRH ST (E)	CYPRESS ST (E)	AC	E	2	640	36	17,110	6/3/24	82	86	14	0	Slurry Seal	1/19/16
3120	4	BURRIS AVE (S)	CYPRESS ST (E)	ALONDRA BLVD (E)	AC	E	2	716	36	18,558	6/3/24	76	83	15	2	Surface Treatment - Slurry Seal	1/19/16
3120	5	BURRIS AVE (S)	CALDWELL ST (E)	GREENLEAF BLVD (E)	AC	E	2	1,335	36	43,463	6/24/24	23	28	64	8	New Construction - Initial	1/1/80
820	1	BUTLER AVE (S)	CITY LIMITS	END	AC	E	2	175	36	7,625	6/18/24	69	90	0	10	New Construction - Initial	1/1/80
820	2	BUTLER AVE (S)	ADANA ST (E)	CALDWELL ST (E)	AAC	E	2	959	36	26,299	6/18/24	50	18	82	0	Slurry Seal	5/1/16
820	3	BUTLER AVE (S)	ROSECRANS AVE (E)	CITY LIMITS	AC	E	2	146	36	3,844	6/26/24	18	31	69	0	New Construction - Initial	1/1/80
820	4	BUTLER AVE (S)	CITY LIMITS	MCMILLAN ST (E)	AC	E	2	89	36	2,818	6/26/24	85	100	0	0	New Construction - Initial	1/1/80
850	1	CALIFORNIA AVE (S)	GREENLEAF BLVD (E)	BENNETT ST (E)	AC	E	2	622	36	15,984	6/24/24	22	34	66	0	New Construction - Initial	1/1/80
850	2	CALIFORNIA AVE (S)	BENNETT ST (E)	CALDWELL ST (E)	AC	E	2	560	36	14,556	6/24/24	23	20	74	6	New Construction - Initial	1/1/80
3500	1	CARESS AVE (S)	GREENLEAF BLVD	CITY LIMIT (N)	AC	E	2	90	33	2,770	6/18/24	87	65	35	0	New Construction - Initial	1/1/80

BranchID	Sec ID	Name	From	To	Surface Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
860	1	CARLIN AVE (E)	MCMILLAN ST (E)	CITY LIMITS	AC	E	2	547	36	9,246	6/26/24	62	23	75	2	Surface Treatment - Slurry Seal	1/16/16
860	2	CARLIN AVE (E)	ALAMEDA ST (N)	CITY LIMITS	AC	E	2	1,634	34	58,213	6/24/24	85	58	42	0	Complete Reconstruction - AC	3/31/20
870	1	CAROB ST (W)	WILMINGTON AVE (S)	526' E/O WILMINGTON AVE (S)	AC	E	2	526	36	18,102	6/10/24	39	41	59	0	New Construction - Initial	1/1/80
870	2	CAROB ST (W)	526' E/0 WILMINGTON AVE (S)	ACACIA AVE (S)	AC	E	2	2,963	36	107,801	6/10/24	21	16	82	2	New Construction - Initial	1/1/80
880	1	CARSON PL (E)	TAMARIND AVE	ALAMEDA ST (N)	PCC	E	2	387	26	16,708	6/4/24	74	21	79	0	New Construction - Initial	1/1/80
890	1	CASTLEGATE AVE (N)	CITY LIMITS	OLANDA ST	AC	E	2	942	36	25,156	4/17/24	23	17	69	14	New Construction - Initial	1/1/80
890	2	CASTLEGATE AVE (N)	OLANDA ST	MCMILLAN ST (E)	AC	E	2	877	36	23,137	4/17/24	21	23	77	0	New Construction - Initial	1/1/80
3130	2	CASTLEGATE AVE (S)	CITY LIMITS	CALDWELL ST (E)	AAC	E	2	1,348	36	43,541	6/18/24	78	53	40	7	Overlay - AC Structural	1/18/11
3130	3	CASTLEGATE AVE (S)	CALDWELL ST (E)	ADANA ST (E)	AAC	E	2	972	36	26,346	6/18/24	83	26	74	0	Slurry Seal	5/1/16
900	1	CASWELL AVE (S)	154TH ST (W)	156TH ST (W)	AC	E	2	438	36	11,646	6/3/24	20	4	82	14	New Construction - Initial	1/1/80
900	2	CASWELL AVE (S)	156TH ST (W)	CYPRESS ST (W)	AAC	E	2	1,482	36	41,356	6/3/24	78	32	11	57	Overlay - AC Structural	6/21/16
900	3	CASWELL AVE (S)	ALONDRA BLVD (W)	CLAUDE ST (W)	AC	E	2	841	36	23,389	4/5/24	19	11	74	15	New Construction - Initial	1/1/80
3140	2	CEDAR ST (E)	WILLOWBROOK AVE	ALAMEDA ST	PCC	E	2	916	36	23,921	6/4/24	23	33	55	12	Surface Treatment - Slurry Seal	1/19/16
910	1	CEDAR ST (W)	END (W)	WILMINGTON AVE (N)	AC	E	2	1,145	36	24,269	5/30/24	16	16	84	0	New Construction - Initial	1/1/80
910	2	CEDAR ST (W)	MATTHISEN AVE (N)	ARANBE AVE (S)	AC	E	2	609	36	15,633	2/29/24	87	95	0	5	New Construction - Initial	1/1/80
910	3	CEDAR ST (W)	S ARNADE AVE (S)	OLEANDER AVE (N)	AC	E	2	692	36	17,134	2/29/24	71	98	0	2	New Construction - Initial	1/1/80
910	4	CEDAR ST (W)	OLEANDER AVE (N)	ACACIA AVE (N)	AC	E	2	841	36	20,832	2/29/24	65	69	29	2	New Construction - Initial	1/1/80
910	5	CEDAR ST (W)	ACACIA AVE (N)	CULVER AVE (N)	AC	E	2	491	36	13,537	2/29/24	78	95	0	5	New Construction - Initial	1/1/80
940	1	CENTRAL AVE FRONTAGE	SAM LITTLETON ST	134TH ST (W)	AC	E	2	540	28	14,270	5/28/24	27	21	66	13	New Construction - Initial	1/1/80
940	2	CENTRAL AVE FRONTAGE	134TH ST (W)	132ND ST (W)	AC	E	2	628	28	16,745	5/28/24	16	13	75	12	New Construction - Initial	1/1/80
940	3	CENTRAL AVE FRONTAGE	132ND ST (W)	CITY LIMITS (N)	AC	E	2	134	28	2,708	5/28/24	10	9	81	10	New Construction - Initial	1/1/80
940	4	CENTRAL AVE FRONTAGE	CITY LIMIT (S)	PIRU ST (W)	AC	E	2	921	27	23,004	4/15/24	9	10	86	4	New Construction - Initial	1/1/80
940	5	CENTRAL AVE FRONTAGE	154TH ST	CDS (N)	AC	E	2	710	26	19,365	4/5/24	60	51	49	0	New Construction - Initial	1/1/80
950	1	CHERRY ST (W)	END (W)	KEMP AVE (N)	AC	E	2	433	36	11,069	5/29/24	14	8	80	12	New Construction - Initial	1/1/80
950	2	CHERRY ST (W)	KEMP AVE (N)	WILMNGTON AVE (N)	AAC	E	2	648	36	15,424	5/29/24	56	26	72	2	Overlay - AC Structural	1/18/11
950	3	CHERRY ST (W)	WILMINGTON AVE (N)	PAULSEN AVE (N)	AC	E	2	574	36	13,387	6/18/24	72	72	13	15	New Construction - Initial	1/1/80
950	4	CHERRY ST (W)	PAULSEN AVE (N)	MATTHISEN AVE (N)	AC	E	2	564	36	14,096	6/18/24	75	88	10	2	New Construction - Initial	1/1/80
950	5	CHERRY ST (W)	MATTHISEN AVE (N)	ARANBE AVE (N)	AC	E	2	614	36	15,343	6/18/24	77	90	9	1	New Construction - Initial	1/1/80
950	6	CHERRY ST (W)	ARANBE AVE (N)	OLEANDER AVE (N)	AC	E	2	688	36	17,420	6/18/24	69	64	34	2	New Construction - Initial	1/1/80
3150	1	CHESTER AVE (N)	COMPTON BLVD (E)	PALMER ST (E)	AC	E	2	843	36	20,878	6/25/24	39	43	39	18	New Construction - Initial	1/1/80
3150	2	CHESTER AVE (N)	PALMER ST (E)	ELM ST (E)	AAC	E	2	887	36	20,180	6/25/24	96	31	0	69	Overlay - AC Structural	6/13/23
3150	3	CHESTER AVE (N)	ELM ST (E)	ROSECRANS AVE (E)	AC	E	2	960	36	21,911	6/25/24	54	51	32	17	New Construction - Initial	1/1/80
3150	4	CHESTER AVE (N)	ROSECRANS AVE (E)	TUCKER ST (E)	AC	E	2	1,310	36	52,172	6/17/24	65	57	16	27	New Construction - Initial	1/1/80
3150	5	CHESTER AVE (N)	TUCKER ST (E)	SANTA FE AVE (N)	AC	E	2	408	36	15,730	6/17/24	56	55	12	33	New Construction - Initial	1/1/80
960	1	CHESTER AVE (S)	GREENLEAF BLVD (E)	BENNETT ST (E)	AAC	E	2	619	36	16,328	6/3/24	46	15	85	0	Overlay - AC Structural	7/14/20
960	2	CHESTER AVE (S)	CALDWELL ST (E)	ALONDRA BLVD (E)	AAC	E	2	1,338	36	34,279	6/24/24	48	30	62	8	Overlay - AC Structural	7/14/20
960	3	CHESTER AVE (S)	ALONDRA BLVD (E)	MYRRH ST (E)	AAC	E	2	1,361	36	35,570	6/3/24	93	27	65	8	Overlay - AC Structural	7/14/20
960	4	CHESTER AVE (S)	MYRRH ST (E)	COMPTON BLVD (E)	AC	E	2	1,346	36	34,520	6/3/24	55	36	64	0	New Construction - Initial	1/1/80
970	1	CLAUDE ST (W)	CLYMAR AVE (S)	APRILIA AVE (S)	AC	E	2	776	36	23,684	4/16/24	66	39	58	3	New Construction - Initial	1/1/80
970	2	CLAUDE ST (W)	APRILIA AVE (S)	AMANTHA AVE (S)	AC	E	2	1,179	36	33,703	4/16/24	37	58	42	0	New Construction - Initial	1/1/80
970	3	CLAUDE ST (W)	HILLFORD AVE (S)	NESTOR AVE (S)	AC	E	2	513	36	13,494	4/12/24	34	32	65	3	New Construction - Initial	1/1/80
970	4	CLAUDE ST (W)	END (W)	WILLOWBROOK AVE (S)	AAC	E	2	1,100	36	28,798	6/12/24	62	4	65	31	Overlay - AC Structural	7/14/20
980	1	CLEMMER DR (E)	TARTAR LN (S)	END	AC	E	2	654	36	16,003	3/7/24	78	33	37	30	New Construction - Initial	1/1/80
990	1	CLIVEDEN AVE (S)	154TH ST (W)	156TH ST (W)	AC	E	2	565	36	14,213	5/30/24	53	34	66	0	New Construction - Initial	1/1/80
990	2	CLIVEDEN AVE (S)	TICHENOR ST (W)	CALDWELL ST (W)	AC	E	2	552	36	14,511	4/12/24	31	23	77	0	New Construction - Initial	1/1/80
990	3	CLIVEDEN AVE (S)	CALDWELL ST (W)	BENNETT ST (W)	AC	E	2	948	36	25,362	4/12/24	24	18	81	1	New Construction - Initial	1/1/80
990	4	CLIVEDEN AVE (S)	POPLAR ST (W)	SPRUCE ST (W)	AC	E	2	988	32	25,301	5/30/24	19	12	85	3	New Construction - Initial	1/1/80
1000	1	CLYMAR AVE (S)	154TH ST (W)	156TH ST (W)	AC	E	2	440	36	11,781	4/5/24	21	11	71	18	New Construction - Initial	1/1/80
1000	2	CLYMAR AVE (S)	156TH ST (W)	CYPRESS ST (W)	AAC	E	2	1,483	36	41,593	4/5/24	73	19	39	42	Overlay - AC Structural	6/21/16
1000	3	CLYMAR AVE (S)	CYPRESS ST (W)	ALONDRA BLVD	AC	E	2	260	32	8,067	4/5/24	77	15	85	0	New Construction - Initial	1/1/80
1000	4	CLYMAR AVE (S)	ALONDRA BLVD	CLAUDE ST (W)	AC	E	2	785	30	23,280	4/5/24	43	44	56	0	New Construction - Initial	1/1/80
1010	1	COCOA AVE (W)	ARANABE AVE (S)	BARON AVE (S)	AC	E	2	499	36	17,137	6/3/24	61	45	55	0	Surface Treatment-Cape Seal	1/19/16
1010	2	COCOA AVE (W)	OLEANDER AVE (S)	ACACIA AVE (S)	AC	E	2	656	36	21,095	6/5/24	100	0	0	0	New Construction - Initial	1/1/80
1010	3	COCOA AVE (W)	ACACIA AVE (S)	WILLOWBROOK AVE (S)	AC	E	2	647	36	24,379	6/5/24	43	34	66	0	New Construction - Initial	1/1/80
3160	1	COCOA ST (E)	WILLOWBROOK AVE (S)	TAMARIND AVE (S)	AC	E	2	604	36	21,476	6/5/24	41	16	84	0	Surface Treatment - Slurry Seal	1/19/16
3160	2	COCOA ST (E)	SANTA FE AVE (S)	END	AC	E	2	226	36	8,426	6/3/24	100	0	0	0	New Construction - Initial	1/1/80
1030	1	COMPTON AVE	SLATER AVE (N)	132ND ST (W)	AC	E	2	805	55	41,082	5/28/24	100	100	0	0	New Construction - Initial	1/1/80
1030	2	COMPTON AVE	132ND ST (W)	130TH ST (W)	AC	E	2	645	55	35,025	5/28/24	100	100	0	0	New Construction - Initial	1/1/80
1030	3	COMPTON AVE	130TH ST (W)	EL SEGUNDO BLVD (W)	AAC	E	2	790	55	38,601	5/28/24	99	46	0	54	Overlay - AC Structural	1/18/11
1070	1	COOKACRE AVE (S)	MCMILLAN ST (E)	CITY LIMITS	AC	E	2	87	36	2,977	6/26/24	70	50	18	32	New Construction - Initial	1/1/80

BranchID	Sec ID	Name	From	To	Surface Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
3170	1	CORLETT AVE (N)	132ND ST (W)	LITTLETON ST	AC	E	2	1,163	36	32,087	5/28/24	76	43	30	27	New Construction - Initial	1/1/80
1080	1	CORLETT AVE (S)	156TH ST (W)	CYPRESS ST (W)	AC	E	2	1,295	36	37,153	6/3/24	90	92	0	8	Complete Reconstruction - AC	5/1/15
1090	1	CORYDON ST (W)	APRILIA AVE (S)	AMANTHA AVE (S)	AC	E	2	1,103	36	27,755	4/5/24	94	100	0	0	Complete Reconstruction - AC	1/1/16
1100	1	CRANE AVE (N)	ROSECRANS AVE (E)	ELM ST (E)	AAC	E	1	968	17	14,963	6/25/24	65	33	67	0	Overlay - AC Structural	6/11/13
1100	2	CRANE AVE (N)	ELM ST (E)	PALMER ST (E)	AAC	E	1	894	17	14,580	6/25/24	64	47	50	3	Overlay - AC Structural	6/11/13
1100	3	CRANE AVE (N)	PALMER ST (E)	COMPTON BLVD (E)	AAC	E	1	842	17	13,846	6/25/24	67	59	13	28	Overlay - AC Structural	6/11/13
1100	4	CRANE AVE (N)	ALONDRA BLVD (E)	MYRRH ST (E)	AAC	E	2	1,363	27	35,593	6/3/24	63	73	26	1	Overlay - AC Structural	6/11/13
3610	1	CRANE CT	MARCELLE ST (E)	END (N)	AC	E	2	383	31	10,795	3/7/24	81	100	0	0	New Construction - Initial	1/1/80
3610	2	CRANE CT	MARCELLE ST	END PCC	PCC	E	2	93	31	2,276	3/7/24	24	21	60	19	New Construction - Initial	1/1/80
1110	1	CRESSEY ST (W)	END (W)	END (E)	AC	E	2	793	36	34,927	6/11/24	81	77	23	0	Surface Treatment - Cape Seal	1/19/16
1110	2	CRESSEY ST (W)	END (W)	KEMP AVE (N)	AC	E	2	507	36	12,639	5/29/24	12	10	86	4	New Construction - Initial	1/1/80
1110	3	CRESSEY ST (W)	KEMP AVE (N)	WILMINGTON AVE (N)	AAC	E	2	654	36	15,265	5/29/24	34	13	84	3	Overlay - AC Structural	1/18/11
1110	4	CRESSEY ST (W)	WILMINGTON AVE (N)	PAULSEN AVE (N)	AC	E	2	582	36	14,053	6/18/24	71	74	6	20	New Construction - Initial	1/1/80
1110	5	CRESSEY ST (W)	PAULSEN AVE (N)	MATTHISEN AVE (N)	AC	E	2	570	36	13,864	6/18/24	71	91	7	2	New Construction - Initial	1/1/80
1110	6	CRESSEY ST (W)	MATTHISEN AVE (N)	ARANBE AVE (N)	AC	E	2	611	36	15,134	6/18/24	65	80	19	1	New Construction - Initial	1/1/80
1110	7	CRESSEY ST (W)	ARANBE AVE (N)	END (E)	AC	E	2	903	36	22,439	6/18/24	65	83	17	0	New Construction - Initial	1/1/80
1120	1	CULVER AVE (N)	CITY LIMITS	WINONA ST (W)	AC	E	2	278	36	9,938	6/4/24	74	59	39	2	New Construction - Initial	1/1/80
1120	2	CULVER AVE (N)	WINONA ST (W)	DOUGLAS ST (W)	AC	E	2	857	36	31,444	6/4/24	62	35	65	0	New Construction - Initial	1/1/80
1120	3	CULVER AVE (N)	DOUGLAS ST (W)	ROSECRANS AVE (W)	AC	E	2	679	36	24,206	6/4/24	47	25	75	0	Surface Treatment - Slurry Seal	1/19/16
1120	4	CULVER AVE (N)	ROSECRANS AVE (E)	CEDAR AVE (N)	AC	E	2	747	36	20,917	2/29/24	39	35	65	0	Surface Treatment - Slurry Seal	1/19/16
1120	5	CULVER AVE (N)	END (N)	POPLAR ST (W)	AC	E	2	525	36	14,357	2/29/24	68	50	35	15	New Construction - Initial	1/1/80
1120	6	CULVER AVE (N)	POPLAR ST (W)	SCHOOL ST (W)	AC	E	2	943	36	26,941	2/29/24	74	70	25	5	New Construction - Initial	1/1/80
1120	7	CULVER AVE (N)	SCHOOL ST (W)	COMPTON BLVD (W)	AC	E	2	578	36	15,414	2/29/24	61	56	36	8	New Construction - Initial	1/1/80
1130	1	CUZCO ST	GREENLEAF BLVD (E)	CITY LIMIT (N)	AC	E	2	91	36	2,971	6/18/24	89	44	56	0	New Construction - Initial	1/1/80
3540	1	CYPRESS CIR (W)	ARANBE AVE (S)	END (E)	AC	E	2	172	32	7,434	6/3/24	50	61	37	2	New Construction - Initial	1/1/80
1140	1	CYPRESS ST (E)	WILLOWBROOK AVE (S)	TAMARIND AVE (S)	AC	E	2	609	36	21,323	6/5/24	37	30	70	0	New Construction - Initial	1/1/80
1140	2	CYPRESS ST (E)	WILLOW ST (S)	CHESTER AVE (S)	AC	E	2	800	36	20,276	6/3/24	44	45	55	0	New Construction - Initial	1/1/80
1140	3	CYPRESS ST (E)	CHESTER AVE (S)	BURRIS AVE (S)	AC	E	2	989	36	22,980	6/3/24	54	39	61	0	New Construction - Initial	1/1/80
1140	4	CYPRESS ST (E)	BURRIS AVE (S)	BULLIS RD (S)	AC	E	2	1,510	36	31,127	6/3/24	69	48	52	0	Cape Seal	1/1/15
1140	5	CYPRESS ST (E)	BULLIS RD (S)	HOLLY AVE (S)	AC	E	2	1,483	36	39,552	4/18/24	25	22	76	2	New Construction - Initial	1/1/80
3180	1	CYPRESS ST (W)	END (W)	APRILIA AVE (S)	AC	E	2	994	36	27,744	6/3/24	88	55	45	0	Complete Reconstruction - AC	5/1/15
3180	2	CYPRESS ST (W)	APRILIA AVE (S)	KEENE AVE (S)	AC	E	2	891	36	25,518	6/3/24	65	21	79	0	Complete Reconstruction - AC	5/1/15
3180	3	CYPRESS ST (W)	END (W)	PAULSEN CIR	AC	E	2	586	36	21,892	4/12/24	67	98	0	2	New Construction - Initial	1/1/80
3180	4	CYPRESS ST (W)	PAULSEN CIR	CENTER AVE (S)	AC	E	2	531	36	16,784	4/12/24	64	64	33	3	New Construction - Initial	1/1/80
3180	5	CYPRESS ST (W)	ACACIA AVE (S)	WILLOWBROOK AVE (S)	AC	E	2	646	36	21,375	6/5/24	61	32	65	3	New Construction - Initial	1/1/80
3180	6	CYPRESS ST (W)	CENTER AVE (W)	BARON AVE (S)	AC	E	2	625	36	19,793	6/3/24	44	38	62	0	New Construction - Initial	1/1/80
1150	1	DALHART AVE (N)	EL SEGUNDO BLVD (W)	END (N)	AC	E	2	434	36	10,744	5/28/24	47	50	50	0	Surface Treatment-Cape Seal	1/19/16
1160	1	DEADORA AVE (S)	END (N)	COMPTON BLVD (W)	AC	E	2	161	36	3,431	6/17/24	25	37	51	12	New Construction - Initial	1/1/80
1170	1	DEL MAR CT	CHESTER AVE (N)	MAYO AVE (N)	AC	E	2	656	36	13,732	6/26/24	68	44	42	14	Surface Treatment - Slurry Seal	1/19/16
1180	1	DERN AVE (N)	134TH ST (W)	132TH ST (W)	AC	E	2	973	36	25,470	5/28/24	92	36	64	0	Complete Reconstruction - AC	3/31/20
1190	1	DIANE DR (E)	WARD AVE (N)	PINE ST (E)	AAC	E	2	611	36	16,356	4/17/24	88	39	61	0	Overlay - AC Structural	7/14/20
1190	2	DIANE DR (E)	BRADFIELD AVE (N)	STOCKTON AVE (E)	AAC	E	2	771	36	20,822	4/17/24	95	22	67	11	Overlay - AC Structural	7/14/20
1200	1	DIXON ST (E)	ALAMEDA ST (N)	ESTER ST (N)	AC	E	2	965	36	21,533	6/24/24	9	23	66	11	New Construction - Initial	1/1/80
3580	1	DOMINGUEZ HILLS DR	VICTORIA ST (W)	CITY LIMITS (S)	AC	I	2	546	30	30,212	6/11/24	31	45	55	0	New Construction - Initial	1/1/80
1210	1	DOUGLAS AVE (W)	ACACIA AVE (N)	WILLOWBROOK AVE (N)	AC	E	2	724	36	25,910	6/4/24	66	37	63	0	New Construction - Initial	1/1/80
3190	1	DWIGHT AVE (N)	CRESSEY ST (W)	ROSECRANS AVE (W)	AC	E	2	319	36	8,857	6/11/24	67	48	52	0	Surface Treatment-Cape Seal	1/19/16
3190	2	DWIGHT AVE (N)	ROSECRANS AVE (W)	MAPLE ST (W)	AC	E	2	487	36	11,891	5/30/24	56	27	67	6	Complete Reconstruction - AC	5/1/16
3190	3	DWIGHT AVE (N)	MAPLE ST (W)	POPLAR ST	AC	E	2	742	28	20,906	5/30/24	86	100	0	0	Complete Reconstruction - AC	5/1/16
3190	4	DWIGHT AVE (N)	ARBUTUS ST (W)	SCHOOL ST (W)	AC	E	2	724	36	17,907	5/30/24	59	25	75	0	Surface Treatment - Slurry Seal	1/19/16
3190	5	DWIGHT AVE (N)	SCHOOL ST (W)	COMPTON BLVD (W)	AC	E	2	487	36	11,066	5/30/24	50	24	75	1	Surface Treatment - Slurry Seal	1/19/16
3190	6	DWIGHT AVE (N)	POPLAR ST	ARBUTUS ST (W)	AC	E	2	263	26	6,718	5/30/24	36	27	65	8	Complete Reconstruction - AC	5/1/16
1220	1	DWIGHT AVE (S)	COMPTON BLVD (W)	ALMOND ST (W)	AC	E	2	834	36	26,670	5/30/24	54	34	53	13	Cape Seal	1/1/15
1220	2	DWIGHT AVE (S)	MYRRH ST (S)	156TH ST (W)	AC	E	2	269	36	7,603	5/30/24	40	37	47	16	New Construction - Initial	1/1/80
1220	3	DWIGHT AVE (S)	ALONDRA BLVD (W)	CALDWELL ST (W)	AC	E	2	1,723	36	48,308	4/12/24	29	14	82	4	Surface Treatment - Slurry Seal	1/19/16
1220	4	DWIGHT AVE (S)	CALDWELL ST (W)	GREENLEAF BLVD (W)	AAC	E	2	1,137	36	27,967	4/12/24	86	24	76	0	Overlay - AC Structural	7/14/20
1220	5	DWIGHT AVE (S)	ALMOND ST (W)	MYRRH ST (W)	AC	E	2	585	36	18,339	5/30/24	80	39	61	0	Complete Reconstruction - AC	1/1/16
3590	1	EDISON WAY (S)	VICTORIA ST (W)	END (N)	AC	I	2	495	30	24,762	6/11/24	51	75	25	0	New Construction - Initial	1/1/80
1230	1	EL SEGUNDO AVE	ALAMEDA ST (N)	CITY LIMITS (E)	AC	I	2	1,773	40	58,424	6/24/24	13	40	49	11	New Construction - Initial	1/1/80
1250	1	ELIZABETH ST (E)	LONG BEACH BLVD (S)	END PCC	PCC	E	2	42	30	1,589	6/25/24	45	12	88	0	New Construction - Initial	1/1/80
1250	2	ELIZABETH ST (E)	END PCC	CITY LIMITS	AC	E	2	163	30	4,711	6/18/24	42	31	69	0	Surface Treatment-Cape Seal	1/19/16

BranchID	Sec ID	Name	From	To	Surface Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1250	3	ELIZABETH ST (E)	CITY LIMITS	MURIAL AVE (S)	AC	E	2	278	33	9,067	6/25/24	35	24	64	12	New Construction - Initial	1/1/80
1250	4	ELIZABETH ST (E)	MURIAL AVE (S)	CITY LIMITS	AC	E	2	164	33	4,474	6/25/24	58	39	61	0	Surface Treatment - Slurry Seal	1/19/16
1260	1	ELM ST (E)	WILLOWBROOK AVE (N)	TAMARIND AVE (N)	AC	E	2	694	25	17,001	6/4/24	74	75	25	0	New Construction - Initial	1/1/80
1260	2	ELM ST (E)	TAMARIND AVE (N)	ALAMEDA ST (N)	AC	E	2	543	25	9,131	6/4/24	39	39	59	2	New Construction - Initial	1/1/80
1260	3	ELM ST (E)	ALAMEDA ST (N)	ROSS AVE (N)	AC	E	2	407	25	9,260	6/25/24	38	37	44	19	New Construction - Initial	1/1/80
1260	4	ELM ST (E)	ROSE AVE (N)	SANTA FE AVE (N)	AC	E	2	955	26	21,050	6/25/24	55	60	39	1	Surface Treatment - Slurry Seal	1/19/16
1260	5	ELM ST (E)	SANTA FE AVE (N)	BURRIS AVE (N)	AC	E	2	1,289	26	33,163	6/25/24	52	38	52	10	Surface Treatment - Slurry Seal	1/19/16
1260	6	ELM ST (E)	BURRIS AVE (N)	LONG BEACH BLVD (N)	AC	E	2	1,084	26	25,863	6/25/24	29	30	66	4	New Construction - Initial	1/1/80
1260	7	ELM ST (E)	LONG BEACH BLVD (N)	BULLIS RD (N)	AC	E	2	421	30	10,151	6/17/24	9	30	42	28	New Construction - Initial	1/1/80
3200	1	ELM ST (W)	DWIGHT AVE (N)	PACIFIC AVE (W)	AC	E	2	590	25	15,064	5/30/24	55	49	51	0	Surface Treatment - Slurry Seal	1/19/16
3200	2	ELM ST (W)	WILMINGTON AVE (N)	END	AC	E	2	573	25	13,955	6/11/24	15	21	68	11	New Construction - Initial	1/1/80
3200	3	ELM ST (W)	MATTHISEN AVE (N)	OLEANDER AVE (N)	AC	E	2	1,303	25	33,635	2/29/24	70	60	32	8	Surface Treatment - Slurry Seal	1/19/16
3200	4	ELM ST (W)	OLEANDER AVE (N)	WILLOWBROOK AVE (N)	AC	E	2	1,577	25	40,319	2/29/24	54	65	30	5	New Construction - Initial	1/1/80
1270	1	ELVA AV (N)	134TH ST (W)	138TH ST (W)	AAC	E	2	1,554	28	46,749	4/15/24	95	71	0	29	Overlay - AC Structural	7/14/20
3210	1	ESSEY AVE (N)	PIXLEY ST (E)	SAUNDERS ST (E)	AC	E	2	360	32	12,278	6/4/24	23	31	69	0	New Construction - Initial	1/1/80
1280	1	ESSEY AVE (S)	CITY LIMITS	CYPRESS ST (E)	AC	E	2	838	32	22,182	4/18/24	81	12	73	15	Complete Reconstruction - AC	5/1/16
1280	2	ESSEY AVE (S)	CYPRESS ST (E)	LAUREL ST (E)	AC	E	2	1,332	32	38,258	4/18/24	44	12	87	1	Complete Reconstruction - AC	5/1/16
1280	3	ESSEY AVE (S)	LAUREL ST (E)	COMPTON BLVD (E)	AAC	E	2	675	32	17,958	4/18/24	99	100	0	0	Overlay - AC Structural	6/13/23
1290	1	EUCLID AVE (E)	ALAMEDA ST (N)	CITY LIMITS	AC	E	2	1,631	37	58,798	6/24/24	42	34	65	1	Complete Reconstruction - AC	3/31/20
1300	1	EVARG AVE (S)	CALDWELL ST (W)	TICHENOR ST (W)	AC	E	2	383	26	10,066	4/16/24	37	33	59	8	New Construction - Initial	1/1/80
1310	1	EVERS AVE (N)	POPLAR ST (W)	SPRUCE ST (W)	AC	E	2	963	30	26,028	5/30/24	13	4	95	1	New Construction - Initial	1/1/80
1320	1	EXMOOR AVE (S)	KEMP AVE (S)	CALDWELL ST (W)	AC	E	2	1,362	30	36,338	4/12/24	45	9	91	0	New Construction - Initial	1/1/80
1320	2	EXMOOR AVE (S)	CALDWELL ST (W)	KEMP AVE (S)	AC	E	2	1,050	30	28,040	4/12/24	88	4	96	0	New Construction - Initial	1/1/80
1330	1	EZMIRLIAN ST (E)	LONG BEACH BLVD (N)	BULLIS RD (N)	AC	E	2	416	35	12,974	4/17/24	10	15	81	4	New Construction - Initial	1/1/80
1330	2	EZMIRLIAN ST (E)	BULLIS RD (N)	PANNES AVE (N)	AAC	E	2	1,302	28	34,874	4/17/24	100	0	0	100	Overlay - AC Structural	6/13/23
1340	1	FIG ST (W)	OLEANDER AVE (N)	WEST END	AC	E	2	422	28	8,727	6/4/24	59	100	0	0	New Construction - Initial	1/1/80
1340	2	FIG ST (W)	OLEANDER AVE (N)	EAST END	AC	E	2	181	28	5,310	6/4/24	58	97	0	3	New Construction - Initial	1/1/80
1350	1	FLOWER ST (S)	LAUREL ST (E)	NORTH END	AC	E	2	316	30	9,363	6/10/24	70	37	36	27	New Construction - Initial	1/1/80
1360	1	FRAILEY AVE (S)	ALONDRA BLVD (E)	CITY LIMITS	AC	E	2	261	30	7,079	6/26/24	59	61	33	6	New Construction - Initial	1/1/80
1360	2	FRAILEY AVE (S)	McMILLAN ST (E)	CITY LIMITS	AC	E	2	88	30	3,197	6/26/24	27	21	65	14	New Construction - Initial	1/1/80
1380	1	GIBSON ST (S)	CITY LIMITS	McMILLAN ST (E)	AAC	E	2	616	75	44,208	6/26/24	100	0	0	0	Overlay - AC Structural	3/1/24
1380	2	GIBSON ST (S)	ROSECRANS AVE (E)	CITY LIMITS	AC	E	2	312	35	8,156	6/26/24	72	59	41	0	New Construction - Initial	1/1/80
1380	3	GIBSON ST (S)	CITY LIMITS	CITY LIMITS	AC	E	2	212	35	7,422	6/26/24	69	39	45	16	New Construction - Initial	1/1/80
1380	4	GIBSON ST (S)	CITY LIMITS	LINSLEY ST (E)	AC	E	2	1,478	35	41,804	3/7/24	58	42	55	3	Surface Treatment-Cape Seal	1/19/16
1390	1	GLADYS ST (E)	END (W)	WILLOW AVE (S)	AC	E	2	338	36	9,854	3/7/24	100	0	0	0	New Construction - Initial	1/1/80
1390	2	GLADYS ST (E)	SHERER PL (S)	END (W)	AC	E	2	165	35	7,592	6/3/24	45	47	52	1	New Construction - Initial	1/1/80
1400	1	GLENCOE AVE (E)	LONG BEACH BLVD (S)	TEMPLE AVE (S)	AC	E	2	637	36	16,294	6/24/24	34	30	67	3	Slurry Seal	1/1/17
1400	2	GLENCOE AVE (E)	TEMPLE AVE (S)	BURRIS AVE (S)	AC	E	2	859	36	22,545	6/24/24	33	21	62	17	New Construction - Initial	1/1/80
3220	1	GLENCOE ST (W)	END (W)	WILLOWBROOK AVE (S)	AC	E	2	312	36	9,171	6/12/24	71	45	53	2	New Construction - Initial	1/1/80
3220	2	GLENCOE ST (W)	END (E)	ACACIA AVE (S)	AC	E	2	166	36	4,403	6/12/24	46	24	76	0	New Construction - Initial	1/1/80
3220	3	GLENCOE ST (W)	ACACIA AVE (S)	OLEANDER AVE (S)	AAC	E	2	677	36	16,761	6/12/24	31	21	79	0	Surface Treatment - Slurry Seal	1/19/16
1420	1	GOLDEN ST (E)	LONG BEACH BLVD (N)	SHORT AVE (N)	AC	E	2	897	36	22,593	6/19/24	59	67	30	3	New Construction - Initial	1/1/80
1420	2	GOLDEN ST (E)	SHORT AVE (N)	ALHAMBRA AVE	AC	E	2	860	36	23,211	6/19/24	60	70	29	1	New Construction - Initial	1/1/80
3550	1	GOLETA ST	COMPTON BLVD (W)	CITY LIMITS (N)	AC	E	2	172	26	4,282	6/17/24	17	33	63	4	New Construction - Initial	1/1/80
1430	1	GRAHAM AVE (N)	STOCKWELL ST (W)	137TH ST (W)	AC	E	2	671	36	17,636	5/28/24	15	16	74	10	New Construction - Initial	1/1/80
1440	1	GRANDEE AVE	BENNETT ST (W)	CALDWELL ST (W)	AC	E	2	948	34	30,357	4/12/24	21	12	88	0	New Construction - Initial	1/1/80
1440	2	GRANDEE AVE	CALDWELL ST (W)	END (N)	AC	E	2	250	34	9,205	4/12/24	19	15	84	1	New Construction - Initial	1/1/80
1440	3	GRANDEE AVE	REEVE ST (W)	ALONDRA BLVD (W)	AC	E	2	562	34	19,472	4/12/24	30	40	55	5	New Construction - Initial	1/1/80
1440	4	GRANDEE AVE	POPLAR ST (W)	SPRUCE ST (W)	AC	E	2	982	29	25,364	5/30/24	20	5	95	0	New Construction - Initial	1/1/80
1440	5	GRANDEE AVE	138TH ST (W)	136TH ST (W)	AAC	E	2	984	34	30,849	5/28/24	98	34	0	66	Overlay - AC Structural	7/14/20
1440	6	GRANDEE AVE	136TH ST (W)	133RD ST (W)	AAC	E	2	828	34	25,956	5/28/24	99	100	0	0	Overlay - AC Structural	7/14/20
1440	7	GRANDEE AVE	133RD ST (W)	130TH ST (W)	AAC	E	2	967	34	30,385	5/28/24	100	100	0	0	Overlay - AC Structural	7/14/20
1440	8	GRANDEE AVE	130TH ST (W)	EL SEGUNDO BLVD (W)	AAC	E	2	792	34	22,159	5/28/24	99	100	0	0	Overlay - AC Structural	7/14/20
1440	9	GRANDEE AVE	EL SEGUNDO BLVD (W)	127TH ST (W)	AC	E	2	460	28	9,651	5/28/24	90	20	80	0	Complete Reconstruction - AC	3/31/20
1450	1	GRAPE AVE (N)	131ST ST (W)	NORD ST (W)	AAC	E	2	817	36	21,920	6/18/24	62	24	62	14	Overlay - AC Structural	1/18/11
1450	2	GRAPE AVE (N)	NORD ST (W)	STOCKWELL ST (W)	AAC	E	2	738	36	20,019	6/18/24	72	31	49	20	Overlay - AC Structural	1/18/11
1450	3	GRAPE AVE (N)	STOCKWELL ST (W)	137TH ST (W)	AAC	E	2	639	36	17,324	6/18/24	66	31	69	0	Overlay - AC Structural	1/18/11
1450	4	GRAPE AVE (N)	PALM ST (W)	ALMOND ST (W)	AC	E	2	580	36	18,068	6/3/24	49	41	57	2	New Construction - Initial	1/1/80
1450	5	GRAPE AVE (N)	CYPRESS ST (W)	END (N)	AC	E	2	150	36	6,380	4/12/24	63	86	0	14	New Construction - Initial	1/1/80
1460	1	GREENLEAF DR	GREENLEAF BLVD (W)	WILMINGTON AVE (S)	AC	E	2	1,305	36	47,273	6/11/24	67	53	47	0	Surface Treatment - Slurry Seal	1/19/16

BranchID	Sec ID	Name	From	To	Surface Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1490	1	GUNLOCK AV (S)	KEMP AVE (S)	CALDWELL ST (W)	AC	E	2	1,369	36	36,233	4/12/24	60	13	86	1	New Construction - Initial	1/1/80
1490	2	GUNLOCK AV (S)	CALDWELL ST (W)	DWIGHT AVE (S)	AAC	E	2	1,237	36	27,967	4/12/24	75	21	79	0	Overlay - AC Structural	4/6/20
1500	1	HALO DR (S)	MCMILLAN ST (E)	MANETTE PL (S)	AC	E	2	578	36	22,214	6/26/24	41	36	64	0	Surface Treatment-Cape Seal	1/19/16
1510	1	HARLAN AVE (S)	ALONDRA BLVD	TICHENOR ST (W)	AC	E	2	1,199	36	31,455	4/12/24	54	53	43	4	New Construction - Initial	1/1/80
1510	2	HARLAN AVE (S)	166TH ST (W)	BENNETT ST (W)	AC	E	2	443	36	14,223	4/12/24	8	41	57	2	New Construction - Initial	1/1/80
1520	1	HARRIS AVE	GREENLEAF BLVD (E)	CITY LIMITS (N)	AC	E	2	80	29	2,334	6/18/24	67	32	59	9	New Construction - Initial	1/1/80
1520	2	HARRIS AVE	PAULINE ST (E)	ALONDRA BLVD (E)	AC	E	2	1,349	28	34,003	6/18/24	36	24	57	19	New Construction - Initial	1/1/80
1520	3	HARRIS AVE	ALONDRA BLVD (E)	LINSLEY ST (E)	AC	E	2	670	30	16,419	4/18/24	88	33	67	0	Complete Reconstruction - AC	5/1/16
1520	4	HARRIS AVE	LINSLEY ST (E)	MYRRH ST (E)	AC	E	2	667	30	17,316	4/18/24	93	59	41	0	Complete Reconstruction - AC	5/1/16
1520	5	HARRIS AVE	MYRRH ST (E)	LAUREL ST (E)	AC	E	2	673	30	17,024	4/18/24	76	26	74	0	Complete Reconstruction - AC	5/1/16
1520	6	HARRIS AVE	LAUREL ST (E)	COMPTON BLVD (E)	AC	E	2	678	30	16,594	4/18/24	80	11	84	5	Complete Reconstruction - AC	5/1/16
1520	7	HARRIS AVE	CITY LIMITS (S)	ROSECRANS AVE (E)	AC	E	2	183	39	4,576	6/26/24	50	46	54	0	New Construction - Initial	1/1/80
1520	8	HARRIS AVE	ROSECRANS AVE (E)	CITY LIMITS (N)	AC	E	2	164	39	2,731	6/26/24	43	52	47	1	New Construction - Initial	1/1/80
1520	9	HARRIS AVE	CITY LIMITS (S)	MCMILLAN ST (E)	AC	E	2	89	26	2,209	6/26/24	80	40	0	60	New Construction - Initial	1/1/80
1530	1	HASKINS AVE	CALDWELL ST (W)	END (S)	AC	E	2	415	24	11,200	4/5/24	24	21	70	9	New Construction - Initial	1/1/80
1550	1	HATCHWAY ST (W)	PAULSEN AVE (N)	CITY LIMITS	AC	E	2	75	36	1,409	6/18/24	23	5	73	22	New Construction - Initial	1/1/80
1560	1	HICKORY AVE (N)	ROSECRANS AVE (W)	CEDAR ST (W)	AC	E	2	742	36	25,534	6/17/24	80	74	26	0	Surface Treatment - Slurry Seal	1/19/16
1570	1	HILLFORD AVE (N)	END (N)	POPLAR ST (W)	AC	E	2	397	36	13,269	6/3/24	42	20	80	0	Surface Treatment - Slurry Seal	1/19/16
1570	2	HILLFORD AVE (N)	ARBUTUS ST (W)	BRAZIL ST (W)	AC	E	2	249	36	6,817	6/5/24	43	54	46	0	New Construction - Initial	1/1/80
1570	3	HILLFORD AVE (N)	BRAZIL ST (W)	PALMER ST (W)	AC	E	2	270	36	8,156	6/5/24	19	10	90	0	New Construction - Initial	1/1/80
3570	1	HILLFORD AVE (S)	166TH ST (W)	CALDWELL ST (W)	AC	E	2	486	40	17,647	4/12/24	14	11	89	0	New Construction - Initial	1/1/80
3570	2	HILLFORD AVE (S)	CALDWELL ST (W)	163RD ST (W)	AC	E	2	313	40	12,109	4/12/24	19	6	91	3	New Construction - Initial	1/1/80
3570	3	HILLFORD AVE (S)	TICHENOR ST (W)	REEVE ST (W)	AC	E	2	590	30	16,258	4/12/24	49	64	23	13	New Construction - Initial	1/1/80
3570	4	HILLFORD AVE (S)	REEVE ST (W)	RAYMOND ST (W)	AC	E	2	292	30	9,860	4/12/24	39	55	45	0	New Construction - Initial	1/1/80
1580	1	HOLLY AVE (N)	BALES ST (E)	SAN VINCENTE ST (E)	AC	E	2	323	36	5,839	6/4/24	94	100	0	0	Complete Reconstruction - AC	3/31/20
1580	2	HOLLY AVE (N)	SAN VINCENTE ST (E)	COMPTON BLVD (E)	AC	E	2	1,206	36	33,068	6/4/24	48	41	58	1	Surface Treatment-Cape Seal	1/19/16
3230	1	HOLLY AVE (S)	COMPTON BLVD (E)	MYRRH ST (E)	AC	E	2	1,345	36	34,513	4/18/24	13	16	81	3	New Construction - Initial	1/1/80
3230	2	HOLLY AVE (S)	MYRRH ST (E)	ALONDRA BLVD (E)	AC	E	2	1,337	36	35,466	4/18/24	63	17	83	0	New Construction - Initial	1/1/80
1590	1	HOLMES AVE (N)	STOCKWELL ST (W)	136TH ST (W)	AC	E	2	374	36	9,800	5/28/24	15	27	61	12	New Construction - Initial	1/1/80
3680	1	HUNSKAER AVE	MYRRH ST (E)	CITY LIMIT (S)	AC	E	2	462	15	12,908	6/18/24	81	76	24	0	Surface Treatment - Slurry Seal	12/31/19
1600	1	INDIGO ST (E)	WILLOWBROOK AVE (S)	ALAMEDA ST (S)	AC	E	2	1,226	36	40,543	6/5/24	66	76	24	0	New Construction - Initial	1/1/80
3240	1	INDIGO ST (W)	WILLOWBROOK AVE (S)	ACACIA AVE (S)	AC	E	2	708	36	21,440	6/5/24	60	50	50	0	New Construction - Initial	1/1/80
3240	2	INDIGO ST (W)	END (E)	END (W)	AC	E	2	299	36	13,643	6/3/24	43	45	55	0	New Construction - Initial	1/1/80
1610	1	JOHNSON ST (E)	WILLOWBROOK AVE (S)	TAMARIND AVE (S)	AC	E	2	612	36	15,328	6/12/24	77	43	51	6	New Construction - Initial	1/1/80
1610	2	JOHNSON ST (E)	TAMARIND AVE (S)	ALAMEDA ST (S)	AC	E	2	826	36	20,196	6/12/24	50	12	88	0	New Construction - Initial	1/1/80
1610	3	JOHNSON ST (E)	ALAMEDA ST (S)	SANTA FE AVE (S)	AC	E	2	663	36	24,405	6/10/24	9	35	61	4	New Construction - Initial	1/1/80
3250	1	JOHNSON ST (W)	WILLOWBROOKO AVE (S)	ACACIA AVE (S)	AC	E	2	638	36	16,744	6/12/24	56	60	40	0	New Construction - Initial	1/1/80
3250	2	JOHNSON ST (W)	END (E)	OLEANDER AVE (S)	AC	E	2	548	36	13,651	6/12/24	30	28	72	0	New Construction - Initial	1/1/80
1630	1	KALSMAN AVE (N)	134TH ST (W)	133RD ST (W)	AC	E	2	573	36	18,090	4/15/24	16	14	81	5	New Construction - Initial	1/1/80
1630	2	KALSMAN AVE (N)	POPLAR ST (W)	SPRUCE ST (W)	AC	E	2	961	36	25,072	6/3/24	15	7	93	0	New Construction - Initial	1/1/80
1630	3	KALSMAN AVE (N)	133RD ST (W)	END (N)	AC	E	2	502	36	17,563	4/15/24	21	16	69	15	New Construction - Initial	1/1/80
1640	1	KAY ST (E)	CHESTER AVE (N)	VAN NESS AVE (N)	AC	E	2	522	36	14,147	6/17/24	70	59	0	41	New Construction - Initial	1/1/80
1640	2	KAY ST (E)	VAN NESS AVE	LONG BEACH BLVD (N)	AC	E	2	1,579	36	41,511	6/17/24	74	63	17	20	New Construction - Initial	1/1/80
1640	3	KAY ST (E)	BULLIS RD (N)	BRADFIELD AVE (N)	AAC	E	2	640	36	17,623	4/17/24	53	24	66	10	Overlay - AC Structural	1/18/11
1640	4	KAY ST (E)	BRADFIELD AVE (N)	PANNES AVE (N)	AAC	E	2	640	36	16,500	4/17/24	69	35	65	0	Overlay - AC Structural	1/18/11
1650	1	KEENE AVE (N)	134TH ST (W)	132ND ST (W)	AC	E	2	976	36	25,797	5/28/24	74	33	36	31	New Construction - Initial	1/1/80
3260	1	KEENE AVE (S)	CALDWELL ST (W)	TICHENOR ST (W)	AC	E	2	497	36	13,535	4/16/24	28	40	56	4	New Construction - Initial	1/1/80
3260	2	KEENE AVE (S)	ALONDRA BLVD (W)	157TH ST (W)	AAC	E	2	1,058	36	37,678	4/5/24	99	100	0	0	Overlay - AC Structural	6/13/23
3260	3	KEENE AVE (S)	156TH ST (W)	154TH ST (W)	AC	E	2	431	36	12,463	4/16/24	18	4	87	9	New Construction - Initial	1/1/80
3270	1	KEMP AVE (N)	WILMINGTON AVE	CRESSEY ST (W)	AC	E	2	644	36	20,035	6/18/24	58	47	53	0	Surface Treatment-Cape Seal	1/19/16
3270	2	KEMP AVE (N)	CRESSEY ST (W)	SPRUCE ST (W)	AAC	E	2	778	36	21,977	5/29/24	19	24	70	6	Overlay - AC Structural	1/18/11
3270	3	KEMP AVE (N)	SPRUCE ST (W)	END (S)	AC	E	2	530	36	16,811	6/11/24	18	46	48	6	New Construction - Initial	1/1/80
3270	4	KEMP AVE (N)	PACIFIC AVE (W)	PALMER ST (W)	AC	E	2	871	36	25,702	5/30/24	27	39	51	10	New Construction - Initial	1/1/80
3270	5	KEMP AVE (N)	PALMER AVE (W)	COMPTON BLVD (W)	AC	E	2	711	36	20,959	5/30/24	49	44	56	0	Surface Treatment - Slurry Seal	1/19/16
1660	1	KEMP AVE (S)	COMPTON BLVD (W)	152ND ST (W)	AC	E	2	538	36	10,351	6/3/24	46	24	62	14	Surface Treatment - Slurry Seal	1/19/16
1660	2	KEMP AVE (S)	ALMOND ST (W)	MYRRH ST (W)	AC	E	2	563	36	16,792	5/30/24	80	22	78	0	Complete Reconstruction - AC	1/1/16
1660	3	KEMP AVE (S)	ALONDRA BLVD (W)	EXMOOR AVE (S)	AC	E	2	556	36	15,820	4/12/24	45	10	90	0	New Construction - Initial	1/1/80
1660	4	KEMP AVE (S)	EXMOOR AVE (S)	CALDWELL ST (W)	AC	E	2	1,141	36	30,661	4/12/24	48	14	86	0	New Construction - Initial	1/1/80
1660	5	KEMP AVE (S)	CALDWELL ST (W)	EXMOORE AVE (S)	AC	E	2	1,015	36	28,280	4/12/24	85	2	98	0	New Construction - Initial	1/1/80
1670	1	KENESAW AVE (N)	127TH PL (W)	127TH ST (W)	AC	E	2	228	27	5,693	5/28/24	20	20	80	0	Surface Treatment - Cape Seal	1/19/16

BranchID	Sec ID	Name	From	To	Surface Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
3280	1	KILLEN CT (E)	KILLEN PL (E)	END (N)	AAC	E	2	131	36	5,419	4/17/24	100	0	0	0	Overlay - AC Structural	1/1/24
1680	1	KILLEN PL (E)	ORCHARD ST (E)	KILLEN PL (E)	AAC	E	2	1,071	36	28,423	4/17/24	99	100	0	0	Overlay - AC Structural	7/14/20
1680	2	KILLEN PL (E)	BRADFIELD AVE (N)	LOCUST AVE (N)	AAC	E	2	1,250	36	34,579	4/17/24	97	19	0	81	Overlay - AC Structural	3/1/24
1690	1	KNOPF ST (W)	PAULSEN AVE (N)	END (E)	AC	E	2	76	36	1,165	6/18/24	67	39	61	0	New Construction - Initial	1/1/80
1700	1	KONA DR (W)	CITY LIMITS	MAHALO PL (S)	AC	E	2	1,372	36	56,240	6/11/24	73	47	24	29	Surface Treatment-Cape Seal	1/19/16
1710	1	LANTANA ST	MCKINLEY AVE	WADSWORTH AVE (S)	AC	E	2	1,299	36	35,459	4/16/24	28	19	77	4	New Construction - Initial	1/1/80
1720	1	LARGO AVE	MONA BLVD (N)	CITY LIMIT (N)	AC	E	2	632	43	22,639	6/4/24	47	39	61	0	New Construction - Initial	1/1/80
1730	1	LAUREL ST (E)	SOUTHERN PACIFIC RR	WILLOW AVE (S)	AC	E	2	658	32	17,700	6/10/24	53	40	51	9	New Construction - Initial	1/1/80
3290	1	LAUREL ST (W)	END (W)	OLEANDER AVE (S)	AC	E	2	588	32	22,724	6/5/24	72	60	40	0	New Construction - Initial	1/1/80
3290	2	LAUREL ST (W)	OLEANDER AVE (S)	BARRON AVE (S)	AC	E	2	690	32	23,812	6/5/24	78	66	24	10	New Construction - Initial	1/1/80
3290	3	LAUREL ST (W)	BARRON AVE (S)	MATTHISEN AVE (S)	AC	E	2	450	32	12,998	6/5/24	72	26	16	58	New Construction - Initial	1/1/80
3290	4	LAUREL ST (W)	SHERER PL (S)	CENTER AVE (S)	AC	E	2	253	32	7,392	6/3/24	32	19	81	0	New Construction - Initial	1/1/80
3290	6	LAUREL ST (W)	WILMINGTON AVE (S)	KEMP AVE (S)	AAC	E	2	331	32	9,853	5/30/24	76	100	0	0	Overlay - AC Structural	6/2/10
3290	7	LAUREL ST (W)	KEMP AVE (S)	DWIGHT AVE (S)	AAC	E	2	1,295	32	43,762	5/30/24	72	28	64	8	Overlay - AC Structural	6/2/10
1740	1	LIME ST (S)	ALONDRA BLVD (E)	CITY LIMITS	AC	E	2	255	32	6,550	6/26/24	26	33	55	12	New Construction - Initial	1/1/80
1740	2	LIME ST (S)	CITY LIMITS	MCMILLAN ST (E)	AC	E	2	87	32	2,947	6/26/24	17	25	56	19	New Construction - Initial	1/1/80
1740	3	LIME ST (S)	CITY LIMIT (S)	CITY LIMIT (N)	AC	E	2	62	34	2,371	6/26/24	85	100	0	0	New Construction - Initial	1/1/80
1750	1	LINSLEY ST (E)	HARRIS AVE (S)	CITY LIMITS	AAC	E	2	328	32	7,672	4/18/24	100	0	0	0	Overlay - AC Structural	6/13/23
1750	2	LINSLEY ST (E)	CITY LIMITS	GIBSON AVE (S)	AC	E	2	105	24	2,850	3/7/24	74	58	42	0	New Construction - Initial	1/1/80
1760	1	LOCUST AVE (N)	ORCHARD ST (E)	PINE ST DR	AC	E	2	1,023	32	27,959	4/17/24	8	17	83	0	New Construction - Initial	1/1/80
1760	2	LOCUST AVE (N)	ROSECRANS AVE (E)	PIXLEY ST (E)	AC	E	2	686	32	17,706	6/4/24	15	25	71	4	New Construction - Initial	1/1/80
1760	3	LOCUST AVE (N)	PIXLEY ST (E)	END (S)	AC	E	2	667	32	18,251	6/4/24	15	15	73	12	New Construction - Initial	1/1/80
1760	4	LOCUST AVE (N)	SAN VINCENTE ST (E)	COMPTON BLVD (E)	AC	E	2	1,206	32	30,807	6/4/24	86	49	16	35	Complete Reconstruction - AC	3/31/20
3300	1	LOCUST AVE (S)	COMPTON BLVD (E)	MYRRH ST (E)	AC	E	2	1,343	25	33,024	4/18/24	39	54	46	0	New Construction - Initial	1/1/80
1770	1	LOCUST CIR (S)	HOLLY AVE (S)	HOLLY AVE (S)	AAC	E	2	1,209	25	35,828	4/18/24	23	13	72	15	Overlay - AC Structural	6/21/16
1790	1	LUCIEN ST (W)	PAULSEN AVE (N)	END (E)	AC	E	2	80	18	1,475	6/18/24	32	11	89	0	New Construction - Initial	1/1/80
1800	1	MAGNOLIA CT	SCHOOL ST (W)	PAULSEN AVE (N)	AC	E	2	628	26	17,595	2/29/24	73	67	33	0	New Construction - Initial	1/1/80
1830	1	MAHALO PL (S)	KONA DR	MAHALO PL (W)	AC	E	2	435	32	20,643	6/11/24	73	62	0	38	New Construction - Initial	1/1/80
1820	2	MAHALO PL (W)	MAHALO PL (S)	END (E)	AC	E	2	464	32	22,942	6/11/24	61	82	18	0	New Construction - Initial	1/1/80
1840	1	MAIE AVE (N)	COMPTON BLVD (W)	SCHOOL ST (W)	AC	E	2	437	36	12,198	6/5/24	34	61	32	7	New Construction - Initial	1/1/80
1840	2	MAIE AVE (N)	SCHOOL ST (W)	BRAZIL ST (W)	AC	E	2	505	33	17,888	6/5/24	31	50	50	0	New Construction - Initial	1/1/80
3310	1	MAIE AVE (S)	COMPTON BLVD (W)	151ST ST (W)	AC	E	2	300	33	9,503	6/3/24	56	52	48	0	New Construction - Initial	1/1/80
3310	2	MAIE AVE (S)	151ST ST (W)	END (S)	AC	E	2	363	33	11,685	6/3/24	80	82	0	18	New Construction - Initial	1/1/80
3310	3	MAIE AVE (S)	LAUREL ST (W)	156TH ST (W)	AC	E	2	564	33	16,118	5/30/24	58	42	58	0	New Construction - Initial	1/1/80
1860	1	MANETTE PL (S)	MCMILLAN ST (E)	HALO DR (S)	AC	E	2	609	36	21,459	6/26/24	21	29	70	1	New Construction - Initial	1/1/80
3320	1	MAPLE ST (E)	WILLOWBROOK AVE (N)	TAMARIND AVE (N)	PCC	E	2	542	26	14,228	6/4/24	14	11	81	8	New Construction - Initial	1/1/80
3320	2	MAPLE ST (E)	TAMARIND AVE (N)	ALAMEDA ST (N)	PCC	E	2	352	26	8,585	6/4/24	15	23	57	20	New Construction - Initial	1/1/80
1880	1	MAPLE ST (W)	DWIGHT AVE (N)	PACIFIC AVE (W)	AC	E	2	382	26	9,480	5/30/24	22	22	66	12	New Construction - Initial	1/1/80
1880	2	MAPLE ST (W)	END (W)	WILMINGTON AVE (N)	AC	E	2	777	26	18,785	6/11/24	19	67	30	3	New Construction - Initial	1/1/80
1880	3	MAPLE ST (W)	ARANBE AVE (N)	END (E)	AC	E	2	899	26	22,894	6/17/24	71	83	14	3	New Construction - Initial	1/1/80
1890	1	MARCELLE ST (E)	END (W)	POINTSETTIA AVE (S)	AC	E	2	454	32	15,614	3/7/24	64	82	0	18	New Construction - Initial	1/1/80
1890	2	MARCELLE ST (E)	POINTSETTIA AVE (S)	TEMPLE AVE (S)	AC	E	2	516	32	17,756	3/7/24	67	88	0	12	New Construction - Initial	1/1/80
1890	3	MARCELLE ST (E)	LONG BEACH BLVD (S)	CITY LIMIT (E)	AC	E	2	349	28	5,291	6/3/24	45	65	24	11	New Construction - Initial	1/1/80
3330	1	MATTHISEN AVE (S)	COMPTON BLVD (W)	ALMOND ST (W)	AC	E	2	887	30	25,147	6/5/24	67	18	81	1	Surface Treatment - Slurry Seal	1/19/16
3330	2	MATTHISEN AVE (S)	ALMOND ST (W)	LAUREL ST (W)	AC	E	2	375	30	11,298	6/5/24	81	44	54	2	New Construction - Initial	1/1/80
3370	1	MATTHISEN CR	CYPRESS ST (W)	END	AC	E	2	230	33	8,730	4/12/24	58	72	24	4	New Construction - Initial	1/1/80
3340	1	MAYO AVE (N)	COMPTON BLVD (E)	PALMER ST (E)	AC	E	2	846	25	20,839	6/28/24	43	40	60	0	New Construction - Initial	1/1/80
3340	2	MAYO AVE (N)	PALMER ST (E)	ELM ST (E)	AC	E	2	885	28	23,387	6/10/24	50	29	37	34	New Construction - Initial	1/1/80
3340	3	MAYO AVE (N)	ELM ST (E)	ROSECRANS AVE (E)	AC	E	2	964	28	22,164	6/10/24	52	37	34	29	New Construction - Initial	1/1/80
1910	1	MAYO AVE (S)	GREENLEAF BLVD (E)	BENNETT ST (E)	AC	E	2	621	25	16,088	6/24/24	19	35	54	11	New Construction - Initial	1/1/80
1910	2	MAYO AVE (S)	BENNETT ST (E)	CALDWELL ST (E)	AC	E	2	560	25	14,846	6/24/24	19	36	51	13	New Construction - Initial	1/1/80
1910	3	MAYO AVE (S)	CALDWELL ST (W)	ALONDRA BLVD (E)	AAC	E	2	1,497	30	39,878	6/24/24	54	28	68	4	Overlay - AC Structural	7/14/20
1910	4	MAYO AVE (S)	ALONDRA BLVD (E)	CYPRESS ST(E)	AC	E	2	716	28	18,246	6/3/24	71	51	48	1	New Construction - Initial	1/1/80
1910	5	MAYO AVE (S)	CYPRESS ST (E)	MYRRH ST (E)	AC	E	2	641	28	16,996	6/3/24	84	73	27	0	New Construction - Initial	1/1/80
1910	6	MAYO AVE (S)	MYRRH ST (E)	LARUEL ST (E)	AAC	E	2	670	28	17,765	6/3/24	75	22	78	0	Overlay - AC Structural	7/14/20
1910	7	MAYO AVE (S)	LAUREL ST (E)	COMPTON BLVD (E)	AC	E	2	674	28	17,191	6/3/24	27	31	64	5	New Construction - Initial	1/1/80
1920	1	MCDIVITT AVE (N)	ROSECRANS AVE (E)	PECK ST (E)	AC	E	2	657	28	16,794	6/25/24	66	69	26	5	New Construction - Initial	1/1/80
1920	2	MCDIVITT AVE (N)	PECK ST (E)	TUCKER ST (E)	AC	E	2	655	28	17,105	6/25/24	69	67	32	1	New Construction - Initial	1/1/80
1920	3	MCDIVITT AVE (N)	TUCKER ST (E)	END (N)	AC	E	2	480	28	12,615	6/25/24	56	76	23	1	New Construction - Initial	1/1/80
3470	1	MCKINLEY AVE (N)	ROSECRANS AVE (W)	139TH ST (W)	AC	I	2	1,125	40	38,756	5/28/24	75	12	71	17	Complete Reconstruction - AC	5/1/16

BranchID	Sec ID	Name	From	To	Surface Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
3470	2	MCKINLEY AVE (N)	139TH ST	SAM LITTLETON ST	AC	E	2	1,176	25	44,919	5/28/24	84	70	29	1	Complete Reconstruction - AC	5/1/16
3470	3	MCKINLEY AVE (N)	SAM LITTLETON ST	SALINAS AVE (N)	AC	E	2	155	37	7,331	5/28/24	45	26	47	27	New Construction - Initial	1/1/80
1930	1	MCKINLEY AVE (S)	TICHENOR ST (W)	CALDWELL ST (W)	AC	E	2	348	28	10,430	4/16/24	25	32	68	0	New Construction - Initial	1/1/80
1930	2	MCKINLEY AVE (S)	CALDWELL ST (W)	BILLINGS ST (W)	AC	E	2	720	28	20,092	4/16/24	39	32	59	9	New Construction - Initial	1/1/80
1940	1	MCMILLAN ST	BULLIS RD (N)	BRADFIELD AVE (N)	AAC	E	2	1,033	31	28,161	4/17/24	43	32	68	0	Overlay - AC Structural	1/18/11
1940	10	MCMILLAN ST	GIBSON AVE (S)	CITY LIMITS (W)	AC	E	1	193	17	3,180	4/17/24	6	9	85	6	New Construction - Initial	1/1/80
1940	11	MCMILLAN ST	STONEACRE AVE (N)	111' W of CASTLEGATE	AC	E	1	353	17	5,551	4/17/24	21	29	67	4	New Construction - Initial	1/1/80
1940	2	MCMILLAN ST	BRADFIELD AVE (N)	PINE ST (E)	AC	E	2	982	31	26,765	4/17/24	100	100	0	0	New Construction - Initial	1/1/80
1940	3	MCMILLAN ST	PINE ST (E)	HARRIS AVE (N)	AC	E	1	306	17	9,192	4/17/24	35	15	85	0	New Construction - Initial	1/1/80
1940	4	MCMILLAN ST	HARRIS AVE (N)	WALDORF DR (N)	AC	E	1	563	17	10,539	4/17/24	41	13	87	0	New Construction - Initial	1/1/80
1940	5	MCMILLAN ST	WALDORF DR (N)	COOKACRE AVE (S)	AC	E	1	879	17	18,174	4/17/24	62	9	91	0	New Construction - Initial	1/1/80
1940	6	MCMILLAN ST	COOKACRE AVE (S)	LIME AVE (S)	AC	E	1	539	17	8,423	4/17/24	56	22	78	0	New Construction - Initial	1/1/80
1940	7	MCMILLAN ST	LIME AVE (S)	GIBSON AVE (S)	AC	E	1	836	17	15,884	4/17/24	6	10	89	1	New Construction - Initial	1/1/80
1940	8	MCMILLAN ST	GIBSON AVE (S)	CITY LIMITS (E)	AC	E	1	957	17	18,441	4/17/24	16	21	79	0	New Construction - Initial	1/1/80
1940	9	MCMILLAN ST	CITY LIMITS (E)	GIBSON AVE (S)	AC	E	1	788	17	16,622	4/17/24	5	18	82	0	New Construction - Initial	1/1/80
1950	1	MEALY SY (E)	MONA BLVD (N)	TAMARIND AVE	AC	E	2	605	28	17,711	6/4/24	88	87	13	0	New Construction - Initial	1/1/80
1950	2	MEALY SY (E)	TAMARIND AVE	ALAMEDA ST SB	PCC	E	2	192	32	6,660	6/25/24	20	9	71	20	New Construction - Initial	1/1/80
1970	1	MONA BLVD (N)	CITY LIMITS	MEALY ST (E)	AC	E	2	1,249	36	43,621	6/4/24	20	21	79	0	New Construction - Initial	1/1/80
1970	3	MONA BLVD (N)	CITY LIMITS (N)	CITY LIMITS (S)	AC	E	4	1,064	36	60,695	6/25/24	29	46	47	7	New Construction - Initial	1/1/80
1990	1	MULBERRY ST (N)	ROSECRANS AVE (E)	END (N)	AC	E	2	629	36	19,690	6/4/24	66	93	0	7	New Construction - Initial	1/1/80
2000	1	MURIEL AVE (S)	ALONDRA BLVD (E)	END (S)	AAC	E	2	831	28	20,851	6/25/24	85	11	38	51	Overlay - AC Structural	12/31/20
2000	2	MURIEL AVE (S)	CITY LIMITS (N)	CITY LIMITS (S)	AC	E	2	85	36	2,911	6/18/24	83	36	64	0	New Construction - Initial	1/1/80
2000	3	MURIEL AVE (S)	PIXLEY ST (E)	ROSECRANS AVE (E)	AC	E	2	690	28	16,654	6/4/24	38	53	46	1	New Construction - Initial	1/1/80
3530	1	MYRRH LN	SHERER ST (S)	END (W)	AC	E	2	266	33	13,717	6/3/24	57	74	25	1	New Construction - Initial	1/1/80
2010	10	MYRRH ST (E)	TAMARIND AVE (S)	ALAMEDA ST (S)	AC	E	2	545	36	20,255	6/4/24	65	33	67	0	New Construction - Initial	1/1/80
2010	11	MYRRH ST (E)	CITY LIMITS (W)	GIBSON AVE (S)	AAC	E	2	271	32	8,152	3/7/24	95	100	0	0	Overlay - AC Structural	7/14/20
2010	12	MYRRH ST (E)	SAN JOSE AVE (S)	HUNSAKER AVE	AC	E	2	325	30	10,788	6/18/24	81	83	14	3	New Construction - Initial	1/1/80
2010	9	MYRRH ST (E)	PACIFIC ELECTRIC RR	TAMARIND AVE (S)	AC	E	2	652	36	24,228	6/4/24	69	32	60	8	New Construction - Initial	1/1/80
3350	1	MYRRH ST (W)	DWIGHT AVE (S)	KEMP AVE (S)	AAC	E	2	1,264	36	39,490	5/30/24	90	73	21	6	Overlay - AC Structural	6/21/16
3350	2	MYRRH ST (W)	OLEANDER AVE (S)	ACACIA AVE (S)	AC	E	2	661	36	24,376	6/4/24	92	100	0	0	New Construction - Initial	1/1/80
3350	3	MYRRH ST (W)	ACACIA AVE (S)	PACIFIC ELECTRIC RR	AC	E	4	704	36	39,660	6/4/24	92	54	46	0	New Construction - Initial	1/1/80
2020	3	NESTOR AVE (N)	POPLAR ST (W)	145TH ST (W)	AC	E	2	374	32	11,758	6/5/24	32	59	41	0	New Construction - Initial	1/1/80
2020	4	NESTOR AVE (N)	145TH ST (W)	ROSECRANS AVE (E)	AC	E	2	783	32	23,215	6/5/24	35	53	47	0	New Construction - Initial	1/1/80
2020	5	NESTOR AVE (N)	134TH ST (W)	133RD ST (W)	AC	E	2	571	32	15,193	4/15/24	82	57	40	3	New Construction - Initial	1/1/80
2020	6	NESTOR AVE (N)	133RD ST (W)	END (N)	AC	E	2	268	32	10,881	4/15/24	24	23	77	0	New Construction - Initial	1/1/80
3360	1	NESTOR AVE (S)	COMPTON BLVD (W)	152ND ST (W)	AC	E	2	562	32	15,494	6/3/24	72	67	33	0	New Construction - Initial	1/1/80
3360	2	NESTOR AVE (S)	152ND ST (W)	155TH ST (W)	AC	E	2	776	32	22,114	6/3/24	70	79	21	0	New Construction - Initial	1/1/80
3360	3	NESTOR AVE (S)	ALONDRA BLVD (W)	TICHENOR ST (W)	AC	E	2	1,197	32	38,196	4/12/24	43	65	35	0	New Construction - Initial	1/1/80
2030	1	NORD ST (W)	WILMINGOTN AVE (N)	GRAPE AVE (N)	AAC	E	2	504	32	12,881	6/18/24	99	100	0	0	Overlay - AC Structural	4/28/20
2030	2	NORD ST (W)	GRAPE AVE (N)	END (E)	AAC	E	2	327	32	8,401	6/18/24	99	100	0	0	Overlay - AC Structural	4/28/20
3380	1	NORTHWOOD AVE (N)	POPLAR ST (W)	SPRUCE ST (W)	AC	E	2	983	27	25,041	5/30/24	15	29	71	0	New Construction - Initial	1/1/80
2040	1	NORTHWOOD AVE (S)	GREENLEAF BLVD (W)	166TH ST (W)	AC	E	2	612	27	18,955	4/12/24	76	100	0	0	Slurry Seal	5/1/16
2040	2	NORTHWOOD AVE (S)	166TH ST (W)	CALDWELL ST (W)	AC	E	2	502	27	15,777	4/12/24	78	86	0	14	Slurry Seal	5/1/16
2040	3	NORTHWOOD AVE (S)	CALDWELL ST (W)	TICHENOR ST (W)	AC	E	2	580	27	17,978	4/12/24	78	100	0	0	Slurry Seal	5/1/16
2040	4	NORTHWOOD AVE (S)	TICHENOR ST (W)	ALONDRA BLVD (W)	AC	E	2	1,210	36	37,939	4/12/24	81	69	31	0	Slurry Seal	5/1/16
2040	5	NORTHWOOD AVE (S)	156TH ST (W)	LAUREL ST (W)	AC	E	2	568	33	16,222	5/30/24	50	35	56	9	New Construction - Initial	1/1/80
2050	1	OAKS ST	ALAMEDA ST (S)	ROSE AVE (N)	AAC	I	2	477	33	17,003	6/10/24	21	20	80	0	Surface Treatment - Slurry Seal	1/19/16
2050	2	OAKS ST	ROSE AVE (N)	SANTA FE AVE (N)	AAC	I	2	1,198	33	41,859	6/10/24	23	20	71	9	Surface Treatment - Slurry Seal	1/16/16
2050	3	OAKS ST	SANTA FE AVE (N)	ALHAMBRA AVE (N)	AC	E	2	634	36	20,077	6/19/24	11	31	68	1	New Construction - Initial	1/1/80
2050	4	OAKS ST	ALHAMBRA AVE (N)	SHORT AVE (N)	AC	E	2	866	32	25,171	6/19/24	43	41	59	0	New Construction - Initial	1/1/80
2050	5	OAKS ST	SHORT AVE (N)	LONG BEACH BLVD (N)	AC	E	2	864	32	23,400	6/19/24	50	48	49	3	New Construction - Initial	1/1/80
2060	1	OLANDA ST	CITY LIMITS	STONEACRE AVE (N)	AC	E	2	357	28	9,537	4/17/24	21	21	79	0	New Construction - Initial	1/1/80
2070	1	OLEANDER AVE (N)	COMPTON BLVD (W)	SCHOOL ST (W)	AC	E	2	618	28	14,780	6/4/24	66	73	27	0	New Construction - Initial	1/1/80
2070	2	OLEANDER AVE (N)	SCHOOL ST (W)	ARBUTUS ST (W)	AC	E	2	579	28	15,070	6/4/24	69	100	0	0	New Construction - Initial	1/1/80
2070	3	OLEANDER AVE (N)	ARBUTUS ST (W)	CEDAR ST (W)	AC	E	2	757	28	19,085	6/4/24	46	52	47	1	New Construction - Initial	1/1/80
2070	4	OLEANDER AVE (N)	CEDAR ST (W)	ROSECRANS AVE (W)	AC	E	2	737	28	17,883	6/4/24	37	38	62	0	New Construction - Initial	1/1/80
2070	5	OLEANDER AVE (N)	ROSECRANS AVE (W)	CRESSEY ST (W)	AC	E	2	726	28	18,121	6/4/24	69	88	12	0	New Construction - Initial	1/1/80
2070	6	OLEANDER AVE (N)	CRESSEY ST (W)	CITY LIMITS	AC	E	2	806	28	19,498	6/4/24	53	94	6	0	New Construction - Initial	1/1/80
2080	1	OLEANDER AVE (S)	COMPTON BLVD (W)	ALMOND ST (W)	AC	E	2	672	33	20,602	6/4/24	51	46	12	42	New Construction - Initial	1/1/80
2080	2	OLEANDER AVE (S)	ALMOND ST (W)	MYRRH ST (W)	AC	E	2	698	33	24,479	6/4/24	65	62	23	15	New Construction - Initial	1/1/80

BranchID	Sec ID	Name	From	To	Surface Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
2080	3	OLEANDER AVE (S)	ALONDRA BLVD (W)	GATE	AC	E	2	213	33	8,269	6/5/24	96	100	0	0	New Construction - Initial	1/1/80
2080	4	OLEANDER AVE (S)	ALONDRA BLVD (W)	REEVE ST (W)	AC	E	2	659	33	18,797	6/12/24	38	42	53	5	New Construction - Initial	1/1/80
2080	5	OLEANDER AVE (S)	REEVE ST (W)	CALDWELL ST (W)	AC	E	2	928	33	25,317	6/12/24	54	44	53	3	New Construction - Initial	1/1/80
2080	6	OLEANDER AVE (S)	CALDWELL ST (W)	BENNETT ST (W)	AC	E	2	659	36	19,613	6/12/24	65	20	54	26	New Construction - Initial	1/1/80
2080	7	OLEANDER AVE (S)	BENNETT ST (W)	GREENLEAF BLVD (W)	AC	E	2	515	36	15,003	6/12/24	74	31	23	46	New Construction - Initial	1/1/80
2090	1	ORCHARD ST	BULLIS RD (N)	BRADFIELD AVE (N)	AAC	E	2	1,128	36	36,709	4/17/24	82	5	93	2	Overlay - AC Structural	7/14/20
2090	2	ORCHARD ST	BRADFIELD AVE (N)	PANNES AVE (N)	AC	E	2	791	36	26,355	4/17/24	76	3	97	0	New Construction - Initial	1/1/80
2090	3	ORCHARD ST	PANNES AVE (N)	CITY LIMITS	AC	E	2	440	36	14,875	4/17/24	40	44	56	0	New Construction - Initial	1/1/80
2100	1	ORIS ST	PAULSEN AVE (N)	CITY LIMITS	AC	E	2	88	20	1,592	6/18/24	23	12	82	6	New Construction - Initial	1/1/80
2110	1	PACIFIC AVE (W)	KEMP AVE (N)	CEDAR ST (W)	AC	E	2	426	28	11,755	5/30/24	19	29	60	11	New Construction - Initial	1/1/80
2110	2	PACIFIC AVE (W)	CEDAR ST (W)	SPRUCE ST (W)	AC	E	2	531	28	14,734	5/30/24	15	45	47	8	New Construction - Initial	1/1/80
2120	1	PALM CIR (W)	SHERER PL (S)	CITY LIMITS	AC	E	2	144	33	6,584	6/3/24	60	61	39	0	New Construction - Initial	1/1/80
3690	1	PALM CT	OLEANDER AVE (S)	CDS (W)	AC	E	0	231	32	9,800	6/5/24	88	100	0	0	New Construction - Initial	1/1/80
2130	1	PALM ST	BULLIS RD (S)	BOWEN CT (S)	AC	E	2	168	33	4,753	4/18/24	47	34	66	0	New Construction - Initial	1/1/80
3390	1	PALM ST (E)	WILLOWBROOK AVE (S)	ALAMEDA ST (S)	AC	E	2	1,121	33	29,330	6/5/24	97	100	0	0	New Construction - Initial	1/1/80
3400	1	PALM ST (W)	END	PAULSEN AVE (S)	AC	E	2	450	33	15,480	6/3/24	64	67	33	0	New Construction - Initial	1/1/80
3400	2	PALM ST (W)	MATTHISEN AVE (S)	BARRON ST (S)	AC	E	2	911	33	26,493	6/5/24	58	20	70	10	New Construction - Initial	1/1/80
3400	3	PALM ST (W)	BARRON ST (S)	OLEANDER AVE (S)	AC	E	2	697	33	23,447	6/5/24	68	74	13	13	New Construction - Initial	1/1/80
3400	4	PALM ST (W)	OLEANDER AVE (S)	END	AC	E	2	592	33	21,264	6/5/24	26	15	72	13	New Construction - Initial	1/1/80
2140	1	PALMER ST (E)	BRADFIELD AVE (N)	END (E)	AC	E	2	510	30	13,816	6/4/24	88	66	34	0	New Construction - Initial	1/1/80
2140	2	PALMER ST (E)	END (W)	BRADFIELD (N)	AC	E	2	460	30	13,852	6/4/24	66	42	58	0	New Construction - Initial	1/1/80
2140	3	PALMER ST (E)	BULLIS RD	LONG BEACH BLVD (N)	PCC	I	2	420	30	10,942	6/4/24	19	8	76	16	New Construction - Initial	1/1/80
2150	1	PALMER ST (W)	HILLFORD AVE (N)	NESTOR AVE (N)	AC	E	2	720	27	19,164	6/5/24	11	23	77	0	New Construction - Initial	1/1/80
2150	10	PALMER ST (W)	OLEANDER AVE (N)	ACACIA AVE (N)	AC	E	2	695	27	17,895	2/29/24	89	100	0	0	New Construction - Initial	1/1/80
2150	2	PALMER ST (W)	NESTOR AVE (N)	TAJAUTA AVE (N)	AC	E	2	723	27	18,895	6/5/24	60	64	36	0	New Construction - Initial	1/1/80
2150	3	PALMER ST (W)	TAJAUTA AVE (N)	MAIE AVE (N)	AC	E	2	736	27	19,286	6/5/24	22	17	77	6	New Construction - Initial	1/1/80
2150	4	PALMER ST (W)	BROADACRES AVE (N)	DWIGHT AVE (N)	AC	E	2	368	27	8,434	6/11/24	16	5	83	12	New Construction - Initial	1/1/80
2150	5	PALMER ST (W)	DWIGHT AVE (N)	KEMP AVE (N)	AC	E	2	670	27	16,746	6/11/24	15	5	77	18	New Construction - Initial	1/1/80
2150	6	PALMER ST (W)	KEMP AVE (N)	END	AC	E	2	458	27	11,958	6/11/24	10	12	78	10	New Construction - Initial	1/1/80
2150	8	PALMER ST (W)	WILMINGTON AVE (N)	MATTHISEN AVE (N)	AC	E	2	1,137	27	28,790	2/29/24	73	48	39	13	New Construction - Initial	1/1/80
2150	9	PALMER ST (W)	MATTHISEN AVE (N)	OLEANDER AVE (N)	AC	E	2	1,554	27	40,366	2/29/24	83	100	0	0	New Construction - Initial	1/1/80
2160	1	PANNES AVE (N)	PIXLEY ST (E)	SAUNDERS ST (E)	AC	E	2	374	28	9,427	6/4/24	14	39	49	12	New Construction - Initial	1/1/80
2160	2	PANNES AVE (N)	ROSECRANS AVE (E)	QUEENSDALE ST (E)	AC	E	2	592	36	19,745	4/17/24	60	44	56	0	New Construction - Initial	1/1/80
2160	3	PANNES AVE (N)	QUEENSDALE ST (E)	TUCKER ST (E)	AC	E	2	507	36	17,912	4/17/24	66	48	52	0	New Construction - Initial	1/1/80
2160	4	PANNES AVE (N)	PINE ST (E)	ORCHARD ST (E)	AAC	E	2	772	26	21,296	4/17/24	52	8	65	27	Overlay - AC Structural	7/14/20
3410	1	PANNES AVE (S)	COMPTON BLVD (E)	LAUREL ST (S)	AC	E	2	673	32	18,415	4/18/24	91	19	81	0	New Construction - Initial	1/1/80
3410	2	PANNES AVE (S)	LAUREL ST (E)	MYRRH ST (E)	AC	E	2	669	32	18,451	4/18/24	90	16	84	0	New Construction - Initial	1/1/80
3410	3	PANNES AVE (S)	MYRRH ST (E)	CYPRESS ST (E)	AC	E	2	658	32	17,119	4/18/24	67	73	27	0	New Construction - Initial	1/1/80
3410	4	PANNES AVE (S)	CYPRESS ST (E)	CITY LIMITS	AC	E	2	849	32	20,877	4/18/24	71	54	45	1	New Construction - Initial	1/1/80
3410	5	PANNES AVE (S)	CITY LIMIT	CITY LIMIT	AC	E	2	86	36	2,553	6/18/24	56	32	68	0	New Construction - Initial	1/1/80
2170	1	PARMELEE AVE (N)	END	PIRU ST (W)	AAC	E	2	914	32	28,733	4/15/24	99	58	0	42	Overlay - AC Structural	4/6/21
2170	2	PARMELEE AVE (N)	PIRU ST (W)	134TH ST (W)	AAC	E	2	744	32	25,334	4/15/24	99	58	0	42	Overlay - AC Structural	4/6/21
2170	3	PARMELEE AVE (N)	134TH ST (W)	131ST ST (W)	AAC	E	2	789	32	28,665	4/15/24	99	58	0	42	Overlay - AC Structural	4/6/21
2170	4	PARMELEE AVE (N)	131ST ST (W)	EL SEGUNDO BLVD (W)	AAC	E	2	1,510	32	51,691	4/15/24	100	100	0	0	Overlay - AC Structural	4/6/21
2180	1	PATTIE ST	LONG BEACH BLVD (N)	BULLIS RD (N)	AC	E	2	422	26	7,523	6/17/24	8	26	65	9	New Construction - Initial	1/1/80
2190	1	PAULSEN AVE (N)	131ST ST (W)	NORD ST (W)	AAC	E	2	790	28	21,872	5/29/24	51	15	85	0	Overlay - AC Structural	1/18/11
2190	2	PAULSEN AVE (N)	NORD ST (W)	STOCKWELL ST (W)	AAC	E	2	734	28	20,522	5/29/24	44	12	88	0	Overlay - AC Structural	1/18/11
2190	3	PAULSEN AVE (N)	STOCKWELL ST (W)	138TH ST (W)	AAC	E	2	888	28	26,435	6/18/24	66	16	84	0	Overlay - AC Structural	1/18/11
2190	4	PAULSEN AVE (N)	138TH ST (W)	CHERRY ST (W)	AC	E	2	978	28	25,721	6/18/24	56	69	30	1	New Construction - Initial	1/1/80
2190	5	PAULSEN AVE (N)	CHERRY ST (W)	SPRUCE ST (W)	AC	E	2	492	28	10,553	6/18/24	66	69	31	0	New Construction - Initial	1/1/80
2190	6	PAULSEN AVE (N)	POPLAR ST (W)	ARBUTUS ST (W)	AC	E	2	260	26	6,780	2/29/24	60	37	63	0	New Construction - Initial	1/1/80
2190	7	PAULSEN AVE (N)	SCHOOL ST (W)	COMPTON BLVD (W)	AC	E	2	635	26	16,341	2/29/24	78	61	39	0	New Construction - Initial	1/1/80
2190	8	PAULSEN AVE (N)	ARBUTUS ST (W)	SCHOOL ST (W)	AC	E	2	556	26	14,150	2/29/24	77	38	46	16	New Construction - Initial	1/1/80
3420	1	PAULSEN AVE (S)	PALM ST (W)	ALMOND ST (W)	AC	E	2	577	28	17,652	6/3/24	71	99	0	1	New Construction - Initial	1/1/80
2200	1	PAULSEN CIR	CYPRESS ST (W)	END	AC	E	2	268	26	10,207	4/12/24	55	71	26	3	New Construction - Initial	1/1/80
3440	1	PEACH ST	PINE ST (E)	CITY LIMITS	AC	O	2	322	26	4,502	6/25/24	12	40	58	2	New Construction - Initial	1/1/80
2210	1	PEACH ST (W)	PAULSEN AVE (N)	MATTHISEN AVE (N)	AC	E	2	580	28	15,046	6/18/24	69	87	2	11	New Construction - Initial	1/1/80
2210	2	PEACH ST (W)	MATTHISEN AVE (N)	ARANBE AVE (N)	AC	E	2	612	28	15,379	6/18/24	70	96	4	0	New Construction - Initial	1/1/80
2210	3	PEACH ST (W)	ARANBE AVE (N)	END	AC	E	2	893	28	22,665	6/18/24	81	96	4	0	New Construction - Initial	1/1/80
2220	1	PEAR ST	END	OLEANDER AVE (N)	AC	E	2	991	26	26,643	6/4/24	63	74	26	0	New Construction - Initial	1/1/80

BranchID	Sec ID	Name	From	To	Surface Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
2220	2	PEAR ST	OLEANDER AVE (N)	ACACIA AVE (N)	AC	E	2	306	26	8,518	6/4/24	67	65	21	14	New Construction - Initial	1/1/80
2230	1	PEARL AVE (N)	COMPTON BLVD (E)	PALMER ST(E)	AC	E	2	786	28	21,437	6/25/24	74	57	23	20	New Construction - Initial	1/1/80
2230	2	PEARL AVE (N)	PALMER ST (E)	ELM ST (E)	AC	E	2	886	33	22,957	6/26/24	54	56	27	17	New Construction - Initial	1/1/80
2230	3	PEARL AVE (N)	ELM ST (E)	ROSECRANS AVE (E)	AC	E	2	965	26	24,755	6/25/24	48	39	31	30	New Construction - Initial	1/1/80
2230	4	PEARL AVE (N)	ROSECRANS AVE (E)	PECK ST (E)	AC	E	2	864	26	21,928	6/17/24	45	51	12	37	New Construction - Initial	1/1/80
2230	5	PEARL AVE (N)	PECK ST (E)	END	AC	E	2	788	26	21,674	6/17/24	52	53	4	43	New Construction - Initial	1/1/80
3430	1	PEARL AVE (S)	COMPTON BLVD (E)	MYRRH ST (E)	AC	E	2	1,347	27	35,221	6/3/24	15	29	66	5	New Construction - Initial	1/1/80
3430	2	PEARL AVE (S)	MYRRH ST (E)	ALONDRA BLVD (E)	AAC	E	2	1,363	27	37,487	6/3/24	97	100	0	0	Overlay - AC Structural	7/14/20
3430	3	PEARL AVE (S)	ALONDRA BLVD (E)	CALDWELL ST (E)	AC	E	2	1,336	30	34,597	6/3/24	14	23	70	7	New Construction - Initial	1/1/80
3430	4	PEARL AVE (S)	CALDWELL ST (E)	GREENLEAF BLVD (E)	AC	E	2	1,337	30	34,765	6/3/24	18	19	73	8	New Construction - Initial	1/1/80
2240	1	PECK ST	END	MCDIVITT AVE (N)	AC	E	2	647	28	17,460	6/25/24	67	71	28	1	New Construction - Initial	1/1/80
2240	2	PECK ST	MCDIVITT AVE (N)	CHESTER AVE (N)	AC	E	2	794	28	19,772	6/25/24	67	77	23	0	New Construction - Initial	1/1/80
2240	3	PECK ST	CHESTER AVE (N)	VAN NESS AVE (N)	AC	E	2	521	30	13,589	6/17/24	72	90	6	4	New Construction - Initial	1/1/80
2240	4	PECK ST	VAN NESS AVE (N)	LONG BEACH BLVD (N)	AC	E	2	1,578	30	42,061	6/17/24	78	62	18	20	New Construction - Initial	1/1/80
2250	1	PETROLIA AVE	ALONDRA BLVD (E)	CALDWELL ST (E)	AC	E	2	1,335	33	40,558	6/10/24	1	34	48	18	New Construction - Initial	1/1/80
2260	2	PINE ST	ALAMEDA ST (N)	SANTA FE AVE (N)	AAC	E	2	1,673	33	56,955	6/17/24	20	23	60	17	Overlay - AC Structural	1/18/11
2260	3	PINE ST	SANTA FE AVE (N)	ALHAMBRA AVE (N)	AC	E	2	790	33	26,787	6/19/24	14	45	55	0	New Construction - Initial	1/1/80
2260	4	PINE ST	ALHAMBRA AVE (N)	SHORT AVE (N)	AC	E	2	895	33	29,295	6/19/24	35	47	49	4	New Construction - Initial	1/1/80
2260	5	PINE ST	SHORT AVE (N)	LONG BEACH BLVD (N)	AC	E	2	773	33	23,902	6/19/24	42	59	27	14	New Construction - Initial	1/1/80
2260	6	PINE ST	BULLIS RD (N)	BRADFIELD AVE (N)	AC	E	2	1,008	33	32,666	4/17/24	19	31	69	0	New Construction - Initial	1/1/80
2260	7	PINE ST	BRADFIELD AVE (N)	PANNES AVE (N)	AC	E	2	771	33	25,448	4/17/24	25	35	65	0	New Construction - Initial	1/1/80
2260	8	PINE ST	PANNES AVE (N)	LOCUST AVE (N)	AC	E	2	524	33	17,946	4/17/24	55	47	53	0	New Construction - Initial	1/1/80
2270	1	PIRU ST	CENTRAL AVE	PARMELEE AVE (N)	AC	E	2	1,105	37	40,379	4/15/24	11	11	88	1	New Construction - Initial	1/1/80
2270	2	PIRU ST	PAULSEN AVE (N)	CITY LIMITS	AC	E	2	88	28	1,375	6/18/24	26	4	70	26	New Construction - Initial	1/1/80
2270	3	PIRU ST	PARMELEE AVE (N)	ELVA AVE (N)	AC	E	2	1,101	28	29,850	4/15/24	9	21	73	6	New Construction - Initial	1/1/80
2280	1	PIXLEY ST	ESSEY AVE (N)	PANNES AVE (N)	AC	E	2	648	20	16,161	6/4/24	92	100	0	0	Complete Reconstruction - AC	3/31/20
2280	2	PIXLEY ST	PANNES AVE (N)	THORSON AVE (N)	AC	E	2	826	33	19,610	6/4/24	90	39	0	61	Complete Reconstruction - AC	3/31/20
2290	1	PLAZA DR	GREENLEAF BLVD (E)	GATEWAY DR	AC	E	2	202	36	7,099	6/12/24	76	38	43	19	New Construction - Initial	1/1/80
2300	1	PLUM ST	KEMP AVE (N)	WILMINGTON AVE (N)	AAC	E	2	654	27	15,226	5/29/24	28	16	84	0	Overlay - AC Structural	1/18/11
2300	2	PLUM ST	WILMINGTON AVE (N)	PAULSEN AVE (N)	AC	E	2	567	28	13,948	6/18/24	63	55	30	15	New Construction - Initial	1/1/80
2300	3	PLUM ST	PAULSEN AVE (N)	MATTHISEN AVE (N)	AC	E	2	567	28	14,050	6/18/24	73	96	4	0	New Construction - Initial	1/1/80
2300	4	PLUM ST	MATTHISEN AVE (N)	ARANBE AVE (S)	AC	E	2	614	28	15,498	6/18/24	70	97	0	3	New Construction - Initial	1/1/80
2300	5	PLUM ST	ARANBE AVE (N)	OLEANDER AVE (N)	AC	E	2	685	28	17,263	6/18/24	68	87	11	2	New Construction - Initial	1/1/80
2310	1	POINSETTIA AVE (N)	COMPTON BLVD (E)	PALMER ST (E)	AC	E	2	847	31	20,649	6/25/24	47	53	46	1	New Construction - Initial	1/1/80
2310	2	POINSETTIA AVE (N)	PALMER ST (E)	ELM ST (E)	AC	E	2	886	28	22,625	6/26/24	48	66	34	0	New Construction - Initial	1/1/80
2310	3	POINSETTIA AVE (N)	ELM ST (E)	ROSECRANS AVE (E)	AC	E	2	970	27	24,703	6/26/24	34	58	37	5	New Construction - Initial	1/1/80
2320	1	POINSETTIA AVE (S)	BENNETT ST (E)	CALDWELL ST (E)	AC	E	2	719	35	19,099	6/25/24	35	30	54	16	Surface Treatment-Cape Seal	1/19/16
2320	2	POINSETTIA AVE (S)	CALDWELL ST (E)	MARCELLA ST (E)	AC	E	2	530	35	16,610	6/25/24	69	88	12	0	New Construction - Initial	1/1/80
2320	3	POINSETTIA AVE (S)	MARCELLA ST (E)	ALONDRA BLVD (E)	AC	E	2	810	35	25,335	3/7/24	65	30	40	30	New Construction - Initial	1/1/80
2320	4	POINSETTIA AVE (S)	ALONDRA BLVD (E)	CYPRESS ST (E)	AC	E	2	690	29	17,534	3/7/24	80	100	0	0	New Construction - Initial	1/1/80
2320	5	POINSETTIA AVE (S)	CYPRESS ST (E)	MYRRH ST (E)	AC	E	2	640	28	17,994	3/7/24	77	92	0	8	New Construction - Initial	1/1/80
2320	6	POINSETTIA AVE (S)	MYRRH ST (E)	LAUREL ST (E)	AC	E	2	655	32	18,970	6/3/24	64	75	19	6	New Construction - Initial	1/1/80
2320	7	POINSETTIA AVE (S)	LAUREL ST (E)	COMPTON BLVD (E)	AC	E	2	674	30	18,424	6/3/24	57	72	8	20	New Construction - Initial	1/1/80
2330	1	POPLAR ST	CENTRAL AVE (N)	NESTOR AVE (N)	AAC	E	2	1,140	36	35,633	6/3/24	40	55	45	0	Overlay - AC Structural	6/2/10
2330	10	POPLAR ST	OLEANDER AVE (N)	ACACIA AVE (N)	AC	E	2	820	27	21,929	2/29/24	74	58	36	6	New Construction - Initial	1/1/80
2330	11	POPLAR ST	ACACIA AVE (N)	CULVER AVE (N)	AC	E	2	475	27	13,002	2/29/24	78	51	39	10	New Construction - Initial	1/1/80
2330	12	POPLAR ST	TAMARIND AVE (N)	ALAMEDA ST (N)	AAC	I	2	407	28	8,753	6/4/24	43	21	76	3	Overlay - AC Structural	1/18/11
2330	13	POPLAR ST	END (E)	ROSE AVE (E)	AC	E	2	106	24	3,033	6/10/24	80	100	0	0	New Construction - Initial	1/1/80
2330	2	POPLAR ST	NESTOR AVE (N)	TAJAUTA AVE (N)	AC	E	2	740	35	22,916	6/3/24	24	10	84	6	New Construction - Initial	1/1/80
2330	3	POPLAR ST	TAJAUTA AVE (N)	CLIVEDEN AVE (N)	AAC	E	2	550	32	16,925	5/30/24	68	2	86	12	Overlay - AC Structural	7/14/20
2330	4	POPLAR ST	CLIVEDEN ST	DWIGHT AVE (N)	AAC	E	2	740	32	22,639	5/30/24	90	21	79	0	Overlay - AC Structural	7/14/20
2330	5	POPLAR ST	END (W)	END (E) OF KEMP	AC	E	2	535	27	13,859	5/30/24	31	14	71	15	New Construction - Initial	1/1/80
2330	6	POPLAR ST	END (W)	WILLMINGTON AVE (N)	AC	E	2	450	27	11,972	6/11/24	25	41	45	14	New Construction - Initial	1/1/80
2330	7	POPLAR ST	WILLMINGTON AVE (N)	MATTHISEN AVE (N)	AC	E	2	1,100	36	33,930	2/29/24	67	64	36	0	New Construction - Initial	1/1/80
2330	8	POPLAR ST	MATTHISEN AVE (N)	ARANBE AVE (N)	AC	E	2	610	31	15,280	2/29/24	69	58	39	3	New Construction - Initial	1/1/80
2330	9	POPLAR ST	ARANBE AVE (N)	OLEANDER AVE (N)	AC	E	2	685	28	17,677	2/29/24	76	97	0	3	New Construction - Initial	1/1/80
2340	1	POPPY AVE	ALHAMBRA AVE (N)	SHORT AVE (N)	AC	E	2	847	32	24,926	6/19/24	55	57	21	22	New Construction - Initial	1/1/80
2350	1	QUEENSDALE ST	BULLIS RD (N)	BRADFIELD AVE (N)	AAC	E	2	745	29	20,437	4/17/24	63	33	67	0	Surface Treatment - Slurry Seal	1/16/16
2350	2	QUEENSDALE ST	BRADFIELD AVE (N)	PANNES AVE (N)	AAC	E	2	530	29	13,957	4/17/24	68	28	72	0	Surface Treatment - Slurry Seal	1/19/16
2360	1	RAYMOND ST	APRILLA AVE (S)	REEVE ST (W)	AC	E	2	1,275	33	36,751	4/16/24	36	48	49	3	New Construction - Initial	1/1/80

BranchID	Sec ID	Name	From	To	Surface Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
2360	10	RAYMOND ST	TAMARIND AVE (S)	ALAMEDA ST (S)	AC	E	2	710	35	21,627	6/12/24	78	100	0	0	New Construction - Initial	1/1/80
2360	2	RAYMOND ST	HILLFORD AVE (S)	NESTOR AVE (S)	AC	E	2	475	34	17,296	4/12/24	47	58	33	9	New Construction - Initial	1/1/80
2360	3	RAYMOND ST	DWIGHT AVE (S)	WHITEMARSH AVE (S)	AC	E	2	1,090	36	35,778	4/12/24	65	35	65	0	New Construction - Initial	1/1/80
2360	4	RAYMOND ST	WHITEMARSH AVE (S)	WILLMINGTON AVE (S)	AC	E	2	135	36	3,708	4/12/24	60	25	55	20	New Construction - Initial	1/1/80
2360	5	RAYMOND ST	WILLMINGTON AVE (S)	CENTER ST (S)	AC	E	2	1,290	35	37,025	6/12/24	31	26	59	15	New Construction - Initial	1/1/80
2360	6	RAYMOND ST	CENTER ST (S)	END (W)	AC	E	2	1,195	32	38,470	6/12/24	32	50	50	0	New Construction - Initial	1/1/80
2360	7	RAYMOND ST	OLEANDER AVE (S)	ACACIA AVE (S)	AC	E	2	650	42	23,734	6/12/24	74	96	0	4	New Construction - Initial	1/1/80
2360	8	RAYMOND ST	ACACIA AVE (S)	WILLOWBROOK AVE (S)	AC	E	2	620	40	23,329	6/12/24	65	94	0	6	New Construction - Initial	1/1/80
2360	9	RAYMOND ST	WILLOWBROOK AVE (S)	TAMARIND AVE (S)	AC	E	2	590	40	22,334	6/12/24	79	100	0	0	New Construction - Initial	1/1/80
2370	1	REEVE ST	APRILLA AVE (S)	CENTER AVE (S)	AC	E	2	1,470	35	40,741	4/16/24	29	48	52	0	New Construction - Initial	1/1/80
2370	2	REEVE ST	CENTER AVE (S)	NESTOR AVE (S)	AC	E	2	830	36	26,025	4/12/24	49	57	43	0	New Construction - Initial	1/1/80
2370	3	REEVE ST	OLEANDER AVE (S)	ACACIA AVE (S)	AC	E	2	620	26	16,916	6/12/24	53	45	55	0	New Construction - Initial	1/1/80
2370	4	REEVE ST	ACACIA AVE (S)	WILLOWBROOK AVE (S)	AC	E	2	630	27	16,190	6/12/24	76	98	0	2	New Construction - Initial	1/1/80
2370	5	REEVE ST	WILLOWBROOK AVE (S)	TAMARIND AVE (S)	AC	E	2	577	28	15,892	6/12/24	52	42	58	0	New Construction - Initial	1/1/80
2370	6	REEVE ST	TAMARIND AVE (S)	ALAMEDA ST (S)	AC	E	2	752	28	18,719	6/12/24	68	73	27	0	New Construction - Initial	1/1/80
2370	7	REEVE ST	GRANDEE AVE (S)	END (W)	AC	E	2	133	28	5,926	4/12/24	32	39	57	4	New Construction - Initial	1/1/80
2380	1	RIDDLE AVE	132ND ST (W)	134TH ST (W)	AC	E	2	955	27	25,374	5/28/24	96	100	0	0	Complete Reconstruction - AC	3/31/20
2390	1	ROSE AVE	COMPTON BLVD (E)	PALMER ST (E)	AC	E	2	845	27	18,121	6/10/24	62	35	39	26	New Construction - Initial	1/1/80
2390	2	ROSE AVE	PALMER ST (E)	ELM ST (E)	AC	E	2	880	20	16,914	6/10/24	48	25	44	31	New Construction - Initial	1/1/80
2390	3	ROSE AVE	ELM ST (E)	ROSECRANS AVE (E)	AC	E	2	950	28	25,074	6/10/24	53	36	22	42	New Construction - Initial	1/1/80
2390	4	ROSE AVE	ROSECRANS AVE (E)	TUCKER ST (E)	AC	E	2	1,310	29	33,957	6/10/24	55	44	41	15	New Construction - Initial	1/1/80
2390	5	ROSE AVE	TUCKER ST (E)	OAKS ST (E)	AC	E	2	820	27	21,715	6/10/24	65	71	19	10	New Construction - Initial	1/1/80
2390	6	ROSE AVE	LAUREL ST (E)	COMPTON BLVD (E)	AC	E	2	682	36	17,065	6/10/24	99	100	0	0	New Construction - Initial	1/1/80
2400	1	ROSE ST	CITY LIMITS (E)	GIBSON AVE (S)	AC	E	2	250	26	8,030	3/7/24	53	46	37	17	New Construction - Initial	1/1/80
2440	1	SALINAS AVE	MCKINLEY AVE	CITY LIMITS (N)	AC	E	2	1,210	36	41,262	5/28/24	90	93	0	7	Complete Reconstruction - AC	3/31/20
3520	1	SAM LITTLETON ST (W)	CENTRAL AVE (N)	CORLETT AVE (N)	AC	E	2	1,069	26	53,843	5/28/24	89	100	0	0	Complete Reconstruction - AC	5/1/16
3520	2	SAM LITTLETON ST (W)	CORLETT AVE (N)	MCKINLEY AVE (N)	AC	E	2	879	26	44,201	5/28/24	86	77	0	23	Complete Reconstruction - AC	5/1/16
2450	1	SAN CARLOS ST	GIBSON AVE (S)	CITY LIMITS (E)	AC	E	2	145	28	3,543	6/26/24	54	28	72	0	New Construction - Initial	1/1/80
3670	1	SAN JOSE AVE (S)	CITY LIMIT (N)	MYRRH ST (E)	AC	E	2	584	28	22,263	6/18/24	82	85	15	0	New Construction - Initial	1/1/80
2460	1	SAN LUIS ST	END (W)	BRADFIELD AVE (N)	AC	E	2	458	34	13,754	6/4/24	9	26	66	8	New Construction - Initial	1/1/80
2460	2	SAN LUIS ST	BRADFIELD AVE (N)	END (E)	AC	E	2	505	30	13,687	6/4/24	10	19	73	8	New Construction - Initial	1/1/80
2460	3	SAN LUIS ST	END (W)	HARRIS AVE	AC	E	2	318	32	8,643	6/4/24	61	35	50	15	Complete Reconstruction - AC	3/31/20
2460	4	SAN LUIS ST	CITY LIMIT	CITY LIMIT	AC	E	2	98	32	5,376	6/26/24	39	70	29	1	New Construction - Initial	1/1/80
2470	1	SAN MARCUS ST	END (W)	BRADFIELD AVE (N)	AC	E	2	450	29	13,648	6/4/24	73	45	54	1	New Construction - Initial	1/1/80
2470	2	SAN MARCUS ST	BRADFIELD AVE (N)	HOLLY AVE (N)	AC	E	2	660	30	17,555	6/4/24	82	29	69	2	New Construction - Initial	1/1/80
2470	3	SAN MARCUS ST	HOLLY AVE (N)	END (W)	AC	E	2	130	31	4,447	6/4/24	40	31	68	1	New Construction - Initial	1/1/80
2470	4	SAN MARCUS ST	END (W)	HARRIS AVE	AC	E	2	300	28	8,245	6/4/24	96	100	0	0	Complete Reconstruction - AC	3/31/20
2480	1	SAN MATEO ST	END (W)	HARRIS AVE	AC	E	2	298	27	8,810	6/4/24	95	100	0	0	Complete Reconstruction - AC	3/31/20
2490	1	SAN VINCENTE ST	END (W)	BRADFIELD AVE (N)	AC	E	2	445	28	14,013	6/4/24	65	45	54	1	Surface Treatment-Cape Seal	1/16/16
2490	2	SAN VINCENTE ST	BRADFIELD AVE (N)	HOLLY AVE (N)	AC	E	2	485	28	25,873	6/4/24	34	31	68	1	Cape Seal	1/1/15
2490	3	SAN VINCENTE ST	HOLLY AVE (N)	HARRIS AVE	AC	E	2	971	28	12,385	6/4/24	62	47	51	2	Complete Reconstruction - AC	3/31/20
2490	4	SAN VINCENTE ST	CITY LIMITS w/o ATLANTIC	ATLANTIC AVE (S)	AC	E	2	100	39	3,714	6/26/24	60	40	60	0	New Construction - Initial	1/1/80
2490	5	SAN VINCENTE ST	ATLANTIC AVE (S)	CITY LIMITS e/o ATLANTIC	AC	E	2	120	39	4,583	6/26/24	8	10	82	8	New Construction - Initial	1/1/80
2490	6	SAN VINCENTE ST	WILLIAMS AVE (S)	CITY LIMIT (E)	AC	E	2	95	36	3,534	6/26/24	54	44	56	0	New Construction - Initial	1/1/80
2520	1	SAUNDERS ST	END (W)	BRADFIELD AVE (N)	AC	E	2	270	26	7,211	6/4/24	97	100	0	0	Complete Reconstruction - AC	3/31/20
2520	2	SAUNDERS ST	BRADFIELD AVE (N)	END (E)	AC	E	2	480	26	14,715	6/4/24	96	100	0	0	Complete Reconstruction - AC	3/31/20
2520	3	SAUNDERS ST	THORSON AVE (N)	CITY LIMITS (E)	AC	E	2	305	42	10,727	6/4/24	9	23	64	13	New Construction - Initial	1/1/80
2530	1	SCHINNER ST	TEMPLE AVE (S)	LONG BEACH BLVD (S)	AC	E	2	495	31	13,204	6/24/24	44	39	58	3	Slurry Seal	1/1/17
2540	1	SCHOOL ST	NESTOR AVE (N)	TAJAUTA AVE (N)	AC	E	2	692	29	18,178	6/5/24	9	10	84	6	New Construction - Initial	1/1/80
2540	2	SCHOOL ST	TAJAUTA AVE (N)	MAIE AVE (N)	AC	E	2	720	28	19,477	6/5/24	27	13	66	21	New Construction - Initial	1/1/80
2540	3	SCHOOL ST	BROADACRES AVE (N)	KEMP AVE (N)	AC	E	2	1,020	29	26,417	6/11/24	22	18	67	15	New Construction - Initial	1/1/80
2540	4	SCHOOL ST	KEMP AVE (N)	WILMINGTON AVE (N)	AC	E	2	645	28	15,661	6/11/24	16	6	73	21	New Construction - Initial	1/1/80
2540	5	SCHOOL ST	WILMINGTON AVE (N)	PAULSEN AVE (N)	AC	E	2	535	28	14,399	2/29/24	76	60	40	0	New Construction - Initial	1/1/80
2540	6	SCHOOL ST	PAULSEN AVE (N)	ARANBE AVE (N)	AC	E	2	1,145	28	30,073	2/29/24	75	81	0	19	New Construction - Initial	1/1/80
2540	7	SCHOOL ST	ARANBE AVE (N)	OLEANDER AVE (N)	AC	E	2	930	28	24,644	2/29/24	78	67	33	0	New Construction - Initial	1/1/80
2540	8	SCHOOL ST	OLEANDER AVE (N)	ACACIA AVE (N)	AC	E	2	680	28	18,890	2/29/24	74	75	21	4	New Construction - Initial	1/1/80
2540	9	SCHOOL ST	ACACIA AVE (N)	WILLOWBROODK AVE (N)	AC	E	2	590	28	16,757	2/29/24	67	97	0	3	New Construction - Initial	1/1/80
2550	1	SEQUOIA DR	VICTORIA ST (W)	END (N)	AC	E	2	450	40	14,290	6/11/24	69	98	0	2	New Construction - Initial	1/1/80
2560	1	SHAUER ST	PAULSEN AVE (N)	CITY LIMIT (E)	AC	E	2	80	25	1,568	6/18/24	35	26	74	0	New Construction - Initial	1/1/80
2570	1	SHERER PL	PALM ST (W)	LAUREL ST (W)	AC	E	2	805	35	26,197	6/3/24	45	30	70	0	New Construction - Initial	1/1/80

BranchID	Sec ID	Name	From	To	Surface Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
2570	2	SHERER PL	LAUREL ST (W)	MYRRH LN (W)	AC	E	2	492	28	17,190	6/3/24	33	35	62	3	New Construction - Initial	1/1/80
2580	1	SHORT AVE	POPPY AVE (E)	ARLINGTON ST (E)	AC	E	2	780	27	21,179	6/19/24	50	70	23	7	New Construction - Initial	1/1/80
2580	2	SHORT AVE	ARLINGTON ST (E)	CITY LIMITS (N)	AC	E	2	825	28	21,557	6/19/24	48	46	49	5	New Construction - Initial	1/1/80
2590	1	SIERRA DR	VICTORIA ST (E)	END (N)	AC	I	2	450	55	14,972	6/11/24	70	88	0	12	New Construction - Initial	1/1/80
2600	1	SLATER AVE	136TH ST (W)	134TH PL (W)	AAC	E	2	750	49	31,103	5/28/24	100	0	0	0	Overlay - AC Structural	6/13/23
2600	2	SLATER AVE	134TH PL (W)	END (N)	AAC	E	2	820	36	28,947	5/28/24	99	100	0	0	Overlay - AC Structural	6/13/23
2600	3	SLATER AVE	132ND ST (W)	END (N)	AC	E	2	870	42	30,786	5/29/24	16	20	78	2	New Construction - Initial	1/1/80
2600	4	SLATER AVE	EL SEGUNDO BLVD (W)	CITY LIMITS (N)	AC	E	2	326	33	12,148	5/28/24	9	25	58	17	New Construction - Initial	1/1/80
2610	1	SLOAN AVE	BENNETT ST (E)	CALDWELL ST (E)	AC	E	2	715	32	19,017	6/25/24	44	32	48	20	Surface Treatment - Slurry Seal	1/19/16
2610	2	SLOAN AVE	ALONDRA BLVD (E)	CYPRESS ST (E)	AC	E	2	710	27	18,256	6/3/24	60	64	22	14	New Construction - Initial	1/1/80
2610	3	SLOAN AVE	CYPRESS ST (E)	MYRRH ST (E)	AC	E	2	643	30	18,082	6/3/24	66	84	11	5	New Construction - Initial	1/1/80
2610	4	SLOAN AVE	MYRRH ST (E)	COMPTON BLVD (E)	AC	E	2	1,340	32	36,910	6/3/24	61	71	18	11	New Construction - Initial	1/1/80
2610	5	SLOAN AVE	COMPTON BLVD (E)	PALMER ST (E)	AC	E	2	845	29	20,657	6/26/24	46	63	35	2	New Construction - Initial	1/1/80
2610	6	SLOAN AVE	PALMER ST (E)	ELM ST (E)	AC	E	2	885	27	22,487	6/25/24	30	49	43	8	New Construction - Initial	1/1/80
2610	7	SLOAN AVE	ELM ST (E)	ROSECRANS AVE (E)	AC	E	2	965	27	24,625	6/26/24	16	48	39	13	New Construction - Initial	1/1/80
2620	1	SPORTSMAN DR	CITY LIMIT (S)	ATLANTIC AVE (S)	AC	E	2	1,140	21	31,831	6/18/24	29	34	66	0	New Construction - Initial	1/1/80
2630	1	SPRAGUE ST (W)	KALSMAN AVE (N)	END (E)	AC	E	2	260	21	10,855	4/15/24	20	25	57	18	New Construction - Initial	1/1/80
2640	1	SPRING AVE	COMPTON BLVD (E)	PALMER ST (E)	AAC	E	2	840	24	17,977	6/10/24	85	13	85	2	Overlay - AC Structural	6/13/23
2640	2	SPRING AVE	PALMER ST (E)	ELM ST (E)	AC	E	2	890	24	18,489	6/25/24	16	31	45	24	New Construction - Initial	1/1/80
2640	3	SPRING AVE	ELM ST (E)	ROSECRANS AVE (E)	AC	E	2	950	24	21,038	6/25/24	41	55	26	19	New Construction - Initial	1/1/80
2640	4	SPRING AVE	ROSECRANS AVE (E)	PECK ST (E)	AC	E	2	622	27	16,654	6/10/24	55	51	24	25	New Construction - Initial	1/1/80
2640	5	SPRING AVE	PECK ST (E)	TUCKER ST (E)	AC	E	2	650	27	16,995	6/10/24	57	54	28	18	New Construction - Initial	1/1/80
2640	6	SPRING AVE	TUCKER ST (E)	END (N)	AC	E	2	530	28	14,187	6/10/24	58	74	25	1	New Construction - Initial	1/1/80
2650	1	SPRUCE ST	ALBERTSON AVE (N)	KALSMEN AVE (N)	AC	E	2	510	29	15,817	6/3/24	19	9	86	5	New Construction - Initial	1/1/80
2650	10	SPRUCE ST	OLEANDER AVE (N)	END (E)	AC	E	2	195	28	5,174	6/17/24	72	96	4	0	New Construction - Initial	1/1/80
2650	11	SPRUCE ST	WILLOWBROOK AVE (N)	ALAMEDA ST (N)	PCC	E	2	830	29	23,839	6/4/24	10	10	57	33	New Construction - Initial	1/1/80
2650	2	SPRUCE ST	EVERS AVE (N)	TAJAUTA AVE (N)	AC	E	2	245	29	6,726	5/30/24	13	13	85	2	New Construction - Initial	1/1/80
2650	3	SPRUCE ST	TAJAUTA AVE (N)	BROADACRES AVE (N)	AAC	E	2	810	36	25,975	5/30/24	100	100	0	0	Overlay - AC Structural	6/13/23
2650	4	SPRUCE ST	BROADACRES AVE (N)	DWIGHT AVE (N)	AAC	E	2	495	36	16,208	5/30/24	100	0	0	100	Overlay - AC Structural	6/13/23
2650	5	SPRUCE ST	PACIFIC AVE (W)	END (W)	AC	E	2	105	28	3,506	5/30/24	41	33	37	30	New Construction - Initial	1/1/80
2650	6	SPRUCE ST	KEMP AVE (N)	END (W)	AC	E	2	215	29	5,970	6/11/24	18	36	64	0	New Construction - Initial	1/1/80
2650	7	SPRUCE ST	KEMP AVE (N)	WILMINGTON AVE (N)	AC	E	2	645	28	15,568	6/11/24	31	68	29	3	New Construction - Initial	1/1/80
2650	8	SPRUCE ST	WILMINGTON AVE (N)	MATTHISEN AVE (N)	AC	E	2	1,110	33	33,658	6/17/24	64	89	2	9	New Construction - Initial	1/1/80
2650	9	SPRUCE ST	MATTHISEN AVE (N)	OLEANDER AVE (N)	AC	E	2	1,275	28	32,458	6/17/24	67	68	21	11	New Construction - Initial	1/1/80
2660	1	STANFORD AVE	CITY LIMITS (S)	CITY LIMITS (N)	AC	I	2	1,150	36	38,498	4/15/24	6	25	65	10	New Construction - Initial	1/1/80
2670	1	STANLEY ST	WILLOWBROOK AVE (S)	MANVILLE ST (E)	AC	I	2	1,685	25	48,005	4/5/24	53	37	52	11	New Construction - Initial	1/1/80
2680	1	STOCKTON ST	ALHAMBRA AVE (N)	SHORT AVE(N)	PCC	E	2	880	28	19,398	6/19/24	49	11	44	45	New Construction - Initial	1/1/80
2680	2	STOCKTON ST	SHORT AVE (N)	LONG BEACH BLVD (N)	PCC	E	2	675	28	19,039	6/19/24	58	18	18	64	New Construction - Initial	1/1/80
2680	3	STOCKTON ST	WARD AVE (N)	BRADFORD AVE (N)	AC	E	2	660	28	17,845	4/17/24	44	43	30	27	New Construction - Initial	1/1/80
2680	4	STOCKTON ST	BRADFORD AVE (N)	PANNES AVE (N)	AC	E	2	830	28	23,057	4/17/24	40	49	51	0	New Construction - Initial	1/1/80
2690	1	STOCKWELL ST	SLATER AVE (N)	GRANDEE AVE (N)	AC	E	2	685	55	33,847	5/29/24	11	25	71	4	New Construction - Initial	1/1/80
2690	2	STOCKWELL ST	GRANDEE AVE (N)	HOLMES AVE (N)	AC	E	2	560	55	30,255	5/29/24	10	16	73	11	New Construction - Initial	1/1/80
2690	3	STOCKWELL ST	HOLMES AVE (N)	WILMINGTON AVE (N)	AC	E	2	560	32	21,849	5/29/24	11	12	79	9	New Construction - Initial	1/1/80
2690	4	STOCKWELL ST	WILMINGTON AVE (N)	ANZAC AVE (N)	AC	E	2	295	54	14,518	5/29/24	85	93	7	0	Complete Reconstruction - AC	3/31/20
2690	5	STOCKWELL ST	ANZAC AVE (N)	END (E)	AC	E	2	545	54	30,847	5/29/24	85	71	29	0	Complete Reconstruction - AC	3/31/20
2700	1	STONEACRE AVE	GREENLEAF BLVD (E)	CALDWELL ST (E)	AAC	E	2	1,285	36	43,409	6/18/24	82	74	26	0	Slurry Seal	5/1/16
2700	2	STONEACRE AVE	CALDWELL ST (E)	ALONDRA BLVD (E)	AAC	E	2	1,330	30	38,653	6/18/24	43	28	72	0	Slurry Seal	5/1/16
2700	3	STONEACRE AVE	OLANDA ST	CITY LIMITS (N)	AC	E	2	930	27	25,188	4/17/24	100	0	0	0	New Construction - Initial	1/1/80
2720	1	TAJAUTA AVE	TICHEROR ST (W)	ALONDRA BLVD (W)	AC	E	2	1,180	30	31,514	4/12/24	50	83	17	0	New Construction - Initial	1/1/80
2720	10	TAJAUTA AVE	CITY LIMITS (S)	137TH ST (W)	AC	E	2	370	37	11,916	4/15/24	13	14	80	6	New Construction - Initial	1/1/80
2720	2	TAJAUTA AVE	156TH ST (W)	END (S)	AC	E	2	80	36	2,457	6/3/24	70	100	0	0	New Construction - Initial	1/1/80
2720	3	TAJAUTA AVE	156TH ST (W)	154TH ST (W)	AC	E	2	580	38	18,322	6/3/24	45	45	49	6	New Construction - Initial	1/1/80
2720	4	TAJAUTA AVE	154TH ST (W)	152ND ST (W)	AC	E	2	490	40	17,084	6/3/24	44	38	42	20	New Construction - Initial	1/1/80
2720	5	TAJAUTA AVE	152ND ST (W)	COMPTON BLVD (W)	AC	E	2	515	40	17,466	6/3/24	50	37	44	19	New Construction - Initial	1/1/80
2720	6	TAJAUTA AVE	COMPTON BLVD (W)	PALMER ST (W)	AAC	E	2	670	32	21,328	5/30/24	99	100	0	0	Overlay - AC Structural	7/14/20
2720	7	TAJAUTA AVE	PALMER ST (W)	POPLAR ST (W)	AAC	E	2	780	34	25,382	5/30/24	99	100	0	0	Overlay - AC Structural	7/14/20
2720	8	TAJAUTA AVE	POPLAR ST (W)	SPRUCE ST (W)	AAC	E	2	950	44	41,113	5/30/24	98	100	0	0	Overlay - AC Structural	7/14/20
2720	9	TAJAUTA AVE	SPRUCE ST (W)	ROSECRANS AVE (W)	AAC	E	2	182	49	6,092	5/30/24	98	100	0	0	Overlay - AC Structural	7/14/20
2740	4	TAMARIND AVE	MYRRH ST (E)	END (N)	AAC	E	2	260	40	11,930	6/5/24	80	65	35	0	Overlay - AC Structural	6/2/10
2740	6	TAMARIND AVE	ELM ST (E)	ROSECRANS AVE (E)	PCC	E	2	970	32	28,706	6/4/24	19	16	70	14	New Construction - Initial	1/1/80

BranchID	Sec ID	Name	From	To	Surface Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
2770	1	TAPER AVE	CYPRESS ST (W)	156TH ST (W)	AAC	E	2	1,470	30	43,556	6/3/24	90	45	55	0	Overlay - AC Structural	6/21/16
2770	2	TAPER AVE	156TH ST (W)	154TH ST (W)	AAC	E	2	440	30	11,978	6/3/24	71	2	98	0	Overlay - AC Structural	7/14/20
2780	1	TARTAR LN	SANTE FE AVE (S)	CLEMMER DR (E)	AC	E	1	810	18	16,037	3/7/24	51	12	70	18	New Construction - Initial	1/1/80
2780	2	TARTAR LN	CLEMMER DR (E)	IGREENLEAF BLVD (E)	AC	E	1	700	18	10,898	3/7/24	49	14	72	14	New Construction - Initial	1/1/80
2790	1	TEMPLE AVE	GREENLEAF BLVD (E)	SCHINNER ST (E)	AC	E	2	890	28	21,696	6/25/24	64	24	76	0	Slurry Seal	1/1/17
2790	2	TEMPLE AVE	SCHINNER ST (E)	CALDWELL ST (E)	AC	E	2	445	28	11,778	6/25/24	63	26	74	0	Slurry Seal	1/1/17
2790	3	TEMPLE AVE	CALDWELL ST (E)	MARCELLE ST (E)	AC	E	2	530	40	29,463	6/25/24	33	42	41	17	New Construction - Initial	1/1/80
2790	4	TEMPLE AVE	MARCELLE ST (E)	CITY LIMITS (E)	AC	E	2	520	40	26,409	6/25/24	56	33	67	0	New Construction - Initial	1/1/80
2800	1	THORSON AVE	GREENLEAF BLVD	CITY LIMITS (N)	AC	E	2	80	42	2,797	6/18/24	70	25	75	0	New Construction - Initial	1/1/80
2800	2	THORSON AVE	CITY LIMITS (S)	ALONDRA BLVD (E)	AC	E	2	175	42	3,762	6/25/24	46	9	37	54	New Construction - Initial	1/1/80
2800	3	THORSON AVE	ALONDRA BLVD (E)	MYRRH ST (E)	AC	E	2	1,310	29	35,941	4/18/24	15	24	76	0	New Construction - Initial	1/1/80
2800	4	THORSON AVE	MYRRH ST (E)	LAUREL ST (E)	AC	E	2	660	27	17,237	4/18/24	36	11	74	15	New Construction - Initial	1/1/80
2800	5	THORSON AVE	LAUREL ST (E)	COMPTON BLVD (E)	AC	E	2	681	27	16,824	4/18/24	25	19	74	7	New Construction - Initial	1/1/80
2800	6	THORSON AVE	BALES ST (E)	SAUNDERS ST (E)	AC	E	2	840	28	23,061	6/4/24	80	39	61	0	Complete Reconstruction - AC	3/31/20
2800	7	THORSON AVE	ROSECRANS AVE (E)	CITY LIMITS (N)	AC	E	2	205	30	4,421	4/17/24	47	22	72	6	New Construction - Initial	1/1/80
2800	8	THORSON AVE	CITY LIMITS (S)	MCMILLA ST (E)	AC	E	2	120	30	4,432	4/17/24	80	66	34	0	New Construction - Initial	1/1/80
2810	1	TICHENOR ST	MCKINLEY AVE (S)	WADSWORTH AVE (S)	AC	E	2	1,040	32	29,836	4/16/24	71	71	29	0	New Construction - Initial	1/1/80
2810	10	TICHENOR ST	ACACIA AVE (S)	WILLOWBROOK AVE (S)	AC	E	2	635	29	16,789	6/12/24	77	54	46	0	New Construction - Initial	1/1/80
2810	11	TICHENOR ST	WILLOWBROOK AVE (S)	TAMARIND AVE (S)	AC	E	2	595	28	15,647	6/12/24	73	100	0	0	New Construction - Initial	1/1/80
2810	12	TICHENOR ST	TAMARIND AVE (S)	ALAMEDA ST (S)	AC	E	2	760	28	19,061	6/12/24	75	86	14	0	New Construction - Initial	1/1/80
2810	13	TICHENOR ST	END (W)	POINSETTIA AVE (S)	AC	E	2	452	28	13,690	6/25/24	72	59	0	41	New Construction - Initial	1/1/80
2810	14	TICHENOR ST	POINSETTIA AVE (S)	TEMPLE AVE (S)	AC	E	2	392	28	10,854	6/25/24	65	70	0	30	New Construction - Initial	1/1/80
2810	2	TICHENOR ST	APRILLA AVE (S)	EVARG AVE (S)	AC	E	2	640	30	19,075	4/16/24	50	42	58	0	New Construction - Initial	1/1/80
2810	3	TICHENOR ST	EVARG AVE (S)	AMANTHA AVE (S)	AC	E	2	505	30	14,791	4/16/24	57	65	35	0	New Construction - Initial	1/1/80
2810	4	TICHENOR ST	HILLFORD AVE (S)	TAJAUTA AVE (S)	AC	E	2	715	35	25,034	4/12/24	20	19	73	8	New Construction - Initial	1/1/80
2810	5	TICHENOR ST	TAJAUTA AVE (S)	CLIVEDEN AVE (S)	AC	E	2	690	36	22,622	4/12/24	44	11	89	0	New Construction - Initial	1/1/80
2810	6	TICHENOR ST	WILMINGTON AVE (S)	CENTER ST (S)	AC	E	2	1,290	32	39,247	6/12/24	43	34	66	0	New Construction - Initial	1/1/80
2810	7	TICHENOR ST	CENTER ST (S)	OLEANDER AVE (S)	AC	E	2	1,365	30	40,259	6/12/24	34	44	55	1	New Construction - Initial	1/1/80
2810	8	TICHENOR ST	OLEANDER AVE (S)	END (E)	AC	E	2	242	29	6,570	6/12/24	35	14	86	0	Cape Seal	1/1/15
2810	9	TICHENOR ST	END (W)	ACACIA AVE (S)	AC	E	2	250	36	8,669	6/12/24	81	25	70	5	Slurry Seal	1/1/15
2820	1	TUCKER ST	END (W)	ROSE AVE (N)	AC	E	2	105	28	3,536	6/17/24	69	100	0	0	New Construction - Initial	1/1/80
2820	2	TUCKER ST	ROSE AVE (N)	MCDIVITT AVE (N)	AC	E	2	520	28	14,145	6/17/24	61	87	13	0	New Construction - Initial	1/1/80
2820	3	TUCKER ST	MCDIVITT AVE (N)	SANTA FE AVE (N)	AC	E	2	530	28	12,573	6/17/24	67	62	38	0	New Construction - Initial	1/1/80
2820	4	TUCKER ST	SANTA FE AVE (N)	VAN NESS AVE (N)	AC	E	2	735	30	19,397	6/17/24	60	85	13	2	New Construction - Initial	1/1/80
2820	5	TUCKER ST	VAN NESS AVE (N)	LONG BEACH BLVD	AAC	E	2	1,550	28	42,365	6/17/24	85	46	54	0	Overlay - AC Structural	7/14/20
2820	6	TUCKER ST	BULLIS RD (N)	BRADFORD AVE (N)	AC	E	2	995	29	27,782	4/17/24	72	40	60	0	New Construction - Initial	1/1/80
2820	7	TUCKER ST	BRADFORD AVE (N)	PANNES AVE (N)	AAC	E	2	295	29	8,385	4/17/24	99	100	0	0	Overlay - AC Structural	7/14/20
2830	1	VAN NESS AVE	ELM ST (E)	ROSECRANS AVE (E)	AC	E	2	955	29	24,755	6/25/24	78	38	8	54	New Construction - Initial	1/1/80
2830	2	VAN NESS AVE	ROSECRANS AVE (E)	PECK ST (E)	AC	E	2	840	28	22,315	6/25/24	63	52	48	0	New Construction - Initial	1/1/80
2830	3	VAN NESS AVE	PECK ST (E)	TUCKER ST (E)	AC	E	2	422	28	11,735	6/17/24	62	70	22	8	New Construction - Initial	1/1/80
2830	4	VAN NESS AVE	TUCKER ST (E)	POPPY AVE (E)	AC	E	2	362	29	9,249	6/17/24	61	65	6	29	New Construction - Initial	1/1/80
2840	3	VICTORIA ST (W)	DOMINGUEZ HILLS DR (S)	CITY LIMITS (E)	AC	E	4	880	35	51,857	6/11/24	13	23	72	5	New Construction - Initial	1/1/80
2850	1	VISALIA AVE	END (S)	CALDWELL ST (W)	AC	E	2	615	27	18,094	4/5/24	30	25	75	0	New Construction - Initial	1/1/80
2860	1	VISALIA LN	END (S)	ALONDRA BLVD (W)	AC	E	2	303	32	10,312	3/8/24	74	100	0	0	New Construction - Initial	1/1/80
2870	1	WADSWORTH AVE	BILLINGS ST (W)	CALDWELL ST (W)	AC	E	2	695	27	19,925	4/16/24	55	36	64	0	New Construction - Initial	1/1/80
2870	2	WADSWORTH AVE	CALDWELL ST (W)	CLAUDE ST (W)	AAC	E	2	515	30	14,652	4/16/24	92	4	96	0	Overlay - AC Structural	7/14/20
2870	3	WADSWORTH AVE	COMPTON BLVD (W)	CITY LIMITS (N)	AC	E	2	152	26	3,114	6/17/24	49	57	33	10	New Construction - Initial	1/1/80
2880	1	WALDORF DR	CITY LIMITS (S)	CITY LIMITS (N)	AC	E	2	85	28	2,220	6/26/24	86	100	0	0	New Construction - Initial	1/1/80
2890	1	WALNUT PARK DR	WALNUT ST (W)	WALNUT PKWY (W)	AC	I	2	570	42	24,549	6/11/24	12	19	76	5	New Construction - Initial	1/1/80
2900	1	WALNUT PARK WY	END (W)	END (E)	AC	I	2	720	38	42,020	6/11/24	11	19	78	3	New Construction - Initial	1/1/80
2920	1	WARD AVE	ALONDRA BLVD (E)	CYPRESS ST (E)	AAC	E	2	645	28	16,678	4/18/24	46	19	81	0	Overlay - AC Structural	1/18/11
2920	2	WARD AVE	CYRESS ST (E)	MYRRH ST (E)	AAC	E	2	648	27	17,414	4/18/24	57	28	64	8	Overlay - AC Structural	1/18/11
2920	3	WARD AVE	MYRRH ST (E)	LAUREL ST (E)	AC	E	2	650	28	17,034	4/18/24	75	8	89	3	New Construction - Initial	1/1/80
2920	4	WARD AVE	LAUREL ST (S)	COMPTON BLVD (E)	AAC	E	2	665	28	16,559	4/18/24	84	3	97	0	Overlay - AC Structural	7/14/20
2920	5	WARD AVE	MCMILLAN ST (E)	DIANE DR (E)	AC	E	2	540	30	6,393	4/17/24	74	19	0	81	New Construction - Initial	1/1/80
2920	6	WARD AVE	DIANE DR (E)	ORCHARD ST (E)	AC	E	2	565	30	16,010	4/17/24	65	37	63	0	New Construction - Initial	1/1/80
2930	1	WASHINGTON AVE	GREENLEAF BLVD (E)	CALDWELL ST (E)	AAC	E	2	1,320	28	36,927	6/18/24	96	95	0	5	Overlay - AC Structural	6/21/16
2930	2	WASHINGTON AVE	CALDWELL ST (E)	ALONDRA BLVD (E)	AAC	E	2	1,330	28	36,507	6/18/24	97	100	0	0	Overlay - AC Structural	6/13/23
2930	3	WASHINGTON AVE	ALONDRA BLVD (E)	CITY LIMITS (N)	AC	E	2	145	28	3,187	6/26/24	72	46	54	0	New Construction - Initial	1/1/80
2940	1	WATER WAY	END (S)	134TH ST (W)	AC	E	2	431	36	9,003	4/15/24	96	100	0	0	New Construction - Initial	1/1/80

BranchID	Sec ID	Name	From	To	Surface Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
2950	1	WAYSIDE ST	PAULSEN AVE (N)	CITY LIMITS (E)	AC	E	2	65	22	1,231	6/18/24	51	44	56	0	New Construction - Initial	1/1/80
2960	1	WEBER ST	ALAMEDA ST (N)	CITY LIMITS (E)	AC	I	2	1,780	46	56,167	6/24/24	11	35	58	7	New Construction - Initial	1/1/80
2970	1	WHITE AVE	CALDWELL ST (E)	ALONDRA BLVD (E)	AAC	E	2	1,330	31	36,095	6/18/24	41	24	47	29	Overlay - AC Structural	1/18/11
2980	1	WHITEMARSH AVE	GREENLEAF BLVD (W)	CALDWELL ST (W)	AAC	E	2	1,150	31	32,477	4/12/24	100	100	0	0	Overlay - AC Structural	6/13/23
2980	2	WHITEMARSH AVE	CALDWELL ST (W)	RAYMOND ST (W)	AC	E	2	1,150	31	32,971	4/12/24	52	10	84	6	New Construction - Initial	1/1/80
2990	2	WILLIAMS AVE	CITY LIMITS (S)	MCMILLIAN ST (E)	AC	E	2	85	31	3,002	6/26/24	83	100	0	0	New Construction - Initial	1/1/80
2990	3	WILLIAMS AVE	ROSECRANS AVE	CITY LIMITS (N)	AC	E	2	75	31	3,881	6/26/24	78	100	0	0	New Construction - Initial	1/1/80
3000	1	WILLOW AVE	CALDWELL ST (E)	MYRRH ST (E)	AC	E	2	645	22	14,430	3/7/24	100	0	0	0	New Construction - Initial	1/1/80
3000	2	WILLOW AVE	MYRRH ST (E)	LAUREL ST (E)	AC	E	2	670	27	17,238	3/7/24	100	0	0	0	New Construction - Initial	1/1/80
3000	3	WILLOW AVE	LAUREL ST (E)	COMPTON BLVD (E)	AC	E	2	675	27	17,786	3/7/24	100	0	0	0	New Construction - Initial	1/1/80
3000	4	WILLOW AVE	COMPTON BLVD (E)	PALMER ST (E)	AC	E	2	835	31	19,874	6/10/24	82	84	13	3	New Construction - Initial	1/1/80
3000	5	WILLOW AVE	PALMER ST (E)	ELM ST (E)	AAC	E	2	775	23	19,607	6/10/24	96	100	0	0	Overlay - AC Structural	6/13/23
3000	6	WILLOW AVE	ELM ST (E)	ROSECRANS AVE (E)	AAC	E	2	954	26	22,204	6/10/24	97	100	0	0	Overlay - AC Structural	6/13/23
3000	7	WILLOW AVE	ROSECRANS AVE (E)	PECK ST (E)	AC	E	2	655	30	17,154	6/25/24	79	69	31	0	New Construction - Initial	1/1/80
3000	8	WILLOW AVE	PECK ST (E)	TUCKER ST (E)	AC	E	2	659	30	17,764	6/25/24	75	57	23	20	New Construction - Initial	1/1/80
3000	9	WILLOW AVE	TUCKER ST (E)	END (N)	AC	E	2	435	29	12,055	6/25/24	76	91	7	2	New Construction - Initial	1/1/80
3020	1	WILLOWBROOK AVE	MANVILLE ST (E)	STANLEY ST (E)	AC	I	2	815	26	20,740	4/5/24	27	19	81	0	New Construction - Initial	1/1/80
3030	8	WILLOWBROOK AVE (S) NB	END (S)	ELM ST (E)	AC	E	2	557	35	21,204	6/4/24	68	29	71	0	New Construction - Initial	1/1/80
3650	1	WILMINGTON AVE (FRONTAGE)	STOCKWELL ST (W)	NORD ST (W)	AC	E	2	746	24	17,732	5/29/24	90	28	72	0	Complete Reconstruction - AC	3/31/20
3650	2	WILMINGTON AVE (FRONTAGE)	NORD ST (W)	131ST ST (W)	AC	E	2	815	24	18,584	5/29/24	98	100	0	0	Complete Reconstruction - AC	3/31/20
3080	1	WINONA AVE	ACACIA AVE (N)	WILLOWBROOK AVE (N)	AC	E	2	723	40	26,513	6/4/24	60	30	70	0	New Construction - Initial	1/1/80
3080	2	WINONA AVE	WILLOWBROOK AVE (N)	MONA BLVD (N)	AC	E	2	546	40	18,763	6/4/24	33	15	85	0	New Construction - Initial	1/1/80
								123.2		**19,207,990**							

BranchID	Sec ID	Name	From	To	Surface Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
		Arterials / Collectors															
1730	5	LAUREL ST (E)	BULLIS RD (S)	PANNES AVE	AC	C	2	1,156	32	33,644	4/18/24	7	10	89	1	New Construction - Initial	1/1/80
1730	6	LAUREL ST (E)	PANNES AVE (S)	LOCUST AVE (S)	AC	C	2	637	32	16,426	4/18/24	9	8	87	5	New Construction - Initial	1/1/80
2740	13	TAMARIND AVE	285' S/ ORIS ST	ORIS ST	AC	C	2	285	54	16,147	6/25/24	9	23	74	3	New Construction - Initial	1/1/80
1730	7	LAUREL ST (E)	LOCUST AVE (S)	CITY LIMITS	AC	C	2	656	32	13,636	4/18/24	9	6	93	1	New Construction - Initial	1/1/80
2910	4	WALNUT ST EB	PACIFIC RR TRACKS	WILMINGTON AVE (S)	AC	C	2	960	24	26,642	6/10/24	9	25	61	14	New Construction - Initial	1/1/80
1810	3	MAGNOLIA ST (W)	MAIE AVE (N)	DWIGHT AVE (S)	AC	C	2	659	25	19,746	6/11/24	10	25	68	7	New Construction - Initial	1/1/80
560	4	ATLANTIC AVE NB	ALONDRA BLVD (E)	CITY LIMITS (N)	AC	A	2	254	28	4,113	6/26/24	11	36	49	15	New Construction - Initial	1/1/80
840	2	CALDWELL ST (E)	ALAMEDA ST (S)	END (E)	AC	B	2	981	20	15,490	6/10/24	12	42	56	2	New Construction - Initial	1/1/80
3460	3	WALNUT ST WB	WILMINGTON AVE (S)	PACIFIC RR TRACKS	AC	C	2	960	23	24,623	6/10/24	13	29	68	3	New Construction - Initial	1/1/80
2840	2	VICTORIA ST (W)	APRA ST (W)	DOMINGUEZ HILLS DR (S)	AC	B	4	1,515	35	90,529	6/11/24	13	37	59	4	New Construction - Initial	1/1/80
3460	5	WALNUT ST WB	ANDERSON AVE (S)	WALNUT PARK DR	AC	C	2	1,210	23	32,786	6/10/24	13	23	63	14	New Construction - Initial	1/1/80
2910	3	WALNUT ST EB	ANDERSON AVE (S)	PACIFIC RR TRACKS	AC	C	2	890	24	23,896	6/10/24	14	25	59	16	New Construction - Initial	1/1/80
2840	1	VICTORIA ST (W)	WILMINGTON AVE (S)	APRA ST (W)	AC	B	5	1,350	110	81,320	6/11/24	15	25	71	4	New Construction - Initial	1/1/80
3070	1	WILMINGTON AVE SB	CITY LIMITS (N)	EL SEGUNDO BLVD (W)	AC	A	2	583	32	21,187	6/24/24	15	29	62	9	New Construction - Initial	1/1/80
3460	4	WALNUT ST WB	PACIFIC RR TRACKS	ANDERSON AVE (S)	AC	C	2	895	23	26,758	6/10/24	15	24	63	13	New Construction - Initial	1/1/80
1810	1	MAGNOLIA ST (W)	NESTOR AVE (N)	TAJAUTA AVE (S)	AC	C	2	681	32	23,218	6/5/24	16	3	90	7	New Construction - Initial	1/1/80
1870	2	MANVILLE ST (W)	1400' e/o WILLMINGTON	RR TRACKS	AC	C	4	1,824	57	109,354	4/5/24	16	20	80	0	New Construction - Initial	1/1/80
3460	6	WALNUT ST WB	WALNUT PARK DR	CITY LIMITS (W)	AC	C	2	685	23	18,728	6/10/24	16	27	56	17	New Construction - Initial	1/1/80
1810	2	MAGNOLIA ST (W)	TAJAUTA AVE (S)	MAIE AVE (N)	AC	C	2	699	32	23,095	6/5/24	18	11	82	7	New Construction - Initial	1/1/80
2910	1	WALNUT ST EB	CITY LIMITS (W)	WALNUT PARK DR	AC	C	2	680	24	18,860	6/10/24	18	36	52	12	New Construction - Initial	1/1/80
1870	3	MANVILLE ST (W)	RR TRACKS	ACACIA AVE (S)	AC	C	4	550	57	32,055	4/5/24	18	10	87	3	New Construction - Initial	1/1/80
550	6	ATLANTIC AVE SB	CITY LIMITS (N)	ALONDRA BLVD (E)	AC	A	3	254	34	3,429	6/26/24	19	39	44	17	New Construction - Initial	1/1/80
2910	6	WALNUT ST EB	1724' W WILMINGTON AVE (S)	ACACIA AVE (S)	AC	C	2	1,724	24	49,135	6/10/24	19	35	61	4	New Construction - Initial	1/1/80
3460	1	WALNUT ST WB	ACACIA AVE (S)	1724' E ACACIA AVE (S)	AC	C	2	1,724	23	47,245	6/10/24	19	38	52	10	New Construction - Initial	1/1/80
840	3	CALDWELL ST (E)	END (W)	MAYO AVE (S)	AC	B	2	680	36	21,619	6/24/24	19	23	63	14	New Construction - Initial	1/1/80
2910	2	WALNUT ST EB	WALNUT PARK DR	ANDERSON AVE (S)	AC	C	2	1,210	24	35,253	6/10/24	19	22	72	6	New Construction - Initial	1/1/80
2910	5	WALNUT ST EB	WILMINGTON AVE (S)	1724' W WILMINGTON AVE (S)	AC	C	2	1,724	24	46,277	6/10/24	19	25	59	16	New Construction - Initial	1/1/80
1040	55	COMPTON BLVD EB	WILLIAMS AVE (E)	CITY LIMITS (E)	AC	A	2	98	38	3,028	6/26/24	19	44	36	20	New Construction - Initial	1/1/80
530	5	ARTESIA BLVD EB	1850' E of WILMINGTON	ACACIA AVE (S)	AC	A	2	1,580	24	56,043	6/10/24	20	40	60	0	New Construction - Initial	1/1/80
1480	1	GREENLEAF BLVD	CITY LIMIT (W)	NORTHWOOD AVE (S)	AC	C	2	1,167	48	55,891	6/17/24	20	29	67	4	New Construction - Initial	1/1/80
540	2	ARTESIA BLVD WB	ACACIA AVE (S)	AMERICAN DAWN INC	AC	A	2	1,452	33	52,920	6/10/24	21	33	57	10	New Construction - Initial	1/1/80
560	5	ATLANTIC AVE NB	CITY LIMITS (S)	SAN VINCENTE ST (E)	AC	A	2	378	34	13,341	6/26/24	21	28	50	22	New Construction - Initial	1/1/80
2020	1	NESTOR AVE (N)	COMPTON BLVD (W)	PALMER ST (W)	AC	C	2	786	32	25,459	6/5/24	21	32	68	0	New Construction - Initial	1/1/80
540	7	ARTESIA BLVD WB	SANTA FE AVE (S)	HARBOR AVE (S)	AC	A	2	2,232	42	84,403	6/25/24	21	32	50	18	New Construction - Initial	1/1/80
2020	2	NESTOR AVE (N)	PALMER ST (W)	POPLAR ST (W)	AC	C	2	708	32	23,773	6/5/24	22	60	40	0	New Construction - Initial	1/1/80
920	3	CENTER AVE (S)	CALDWELL ST (W)	TICHENOR ST (W)	AC	C	2	627	24	11,703	4/12/24	22	20	75	5	New Construction - Initial	1/1/80
560	6	ATLANTIC AVE NB	SAN VINCENTE ST (E)	CITY LIMITS (N)	AC	A	2	393	34	12,561	6/26/24	22	22	57	21	New Construction - Initial	1/1/80
540	4	ARTESIA BLVD WB	WILMINGTON AVE (S)	ANDERSON AVE (S)	AC	A	2	1,890	30	62,562	6/10/24	24	40	50	10	New Construction - Initial	1/1/80
1050	1	COMPTON BLVD WB	CITY LIMITS (E)	WILLIAMS AVE (E)	AC	A	2	95	38	3,451	6/26/24	24	37	45	18	New Construction - Initial	1/1/80
930	1	CENTRAL AVE NB	CITY LIMITS (S)	91 FWY BRIDGE	AC	A	2	1,208	36	54,370	6/11/24	24	28	69	3	New Construction - Initial	1/1/80
3460	2	WALNUT ST WB	1724' E ACACIA AVE (S)	WILMINGTON AVE (S)	AC	C	2	1,724	23	48,123	6/10/24	24	36	64	0	New Construction - Initial	1/1/80
840	4	CALDWELL ST (E)	MAYO AVE (S)	BURRIS AVE (S)	AC	B	2	580	36	16,237	6/24/24	24	29	58	13	New Construction - Initial	1/1/80
1040	15	COMPTON BLVD EB	LOCUST AVE (S)	HARRIS AVE (S)	AC	A	2	640	32	18,005	6/18/24	25	46	39	15	New Construction - Initial	1/1/80
1030	4	COMPTON AVE	END PCC N/ EL SEGUNDO BLVD	CITY LIMITS (N)	AC	C	4	380	60	12,203	5/29/24	25	35	54	11	New Construction - Initial	1/1/80
1970	2	MONA BLVD (N)	MEALY ST (E)	WILLOWBROOK AVE (N)	AC	C	2	524	36	37,486	6/4/24	25	33	63	4	New Construction - Initial	1/1/80
550	5	ATLANTIC AVE SB	SAN VINCENTE ST (E)	CITY LIMITS (S)	AC	A	2	378	34	12,069	6/26/24	25	41	59	0	New Construction - Initial	1/1/80
1050	3	COMPTON BLVD WB	HARRIS AVE (S)	LOCUST AVE (N)	AC	A	2	511	28	17,316	6/26/24	25	43	35	22	New Construction - Initial	1/1/80
3060	18	WILMINGTON AVE NB	EL SEGUNDO BLVD (W)	CITY LIMITS (N)	AC	A	2	583	30	18,194	6/24/24	26	33	63	4	New Construction - Initial	1/1/80
1480	2	GREENLEAF BLVD	NORTHWOOD AVE (S)	GREENLEAF DR	AC	C	2	1,145	46	54,174	6/17/24	26	33	67	0	New Construction - Initial	1/1/80
930	2	CENTRAL AVE NB	91 FWY BRIDGE	WALNUT ST (W)	AC	A	2	610	36	23,679	6/11/24	26	40	58	2	New Construction - Initial	1/1/80
920	4	CENTER AVE (S)	TICHENOR ST (W)	ALONDRA BLVD (W)	AC	C	2	999	20	19,966	4/12/24	26	14	78	8	New Construction - Initial	1/1/80
1050	4	COMPTON BLVD WB	LOCUST AVE (N)	BRADFORD AVE (N)	AC	A	2	955	32	37,093	6/26/24	27	37	38	25	New Construction - Initial	1/1/80
540	3	ARTESIA BLVD WB	AMERICAN DAWN INC	WILMINGTON AVE (S)	AC	A	2	2,003	33	64,943	6/10/24	27	41	57	2	New Construction - Initial	1/1/80
1870	1	MANVILLE ST (W)	WILLMINGTON AVE (S)	1400' e/o WILLMINGTON	AC	C	4	1,400	80	80,735	4/5/24	27	31	69	0	New Construction - Initial	1/1/80
300	2	ACACIA AVE	ARTESIA BLVD (S)	WALNUT ST (W)	AC	C	4	1,085	76	60,257	6/10/24	28	22	66	12	New Construction - Initial	1/1/80
1040	16	COMPTON BLVD EB	HARRIS AVE (S)	CITY LIMITS (E)	AC	A	2	145	32	4,179	6/18/24	28	46	44	10	New Construction - Initial	1/1/80
1040	14	COMPTON BLVD EB	BRADFORD AVE (S)	LOCUST AVE (S)	AC	A	2	945	32	35,541	6/18/24	28	47	42	11	New Construction - Initial	1/1/80
540	9	ARTESIA BLVD WB	HARBOR AVE (S)	SANTA FE AVE (S)	AC	A	2	2,232	40	81,783	6/25/24	28	34	44	22	New Construction - Initial	1/1/80
2740	11	TAMARIND AVE	MEALY ST (E)	AC PAVEMENT (285' S/ ORIS ST)	PCC	C	2	1,140	40	56,654	6/25/24	28	10	69	21	New Construction - Initial	1/1/80

BranchID	Sec ID	Name	From	To	Surface Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
3070	12	WILMINGTON AVE SB	156TH ST (W)	ALONDRA BLVD (W)	AC	A	2	1,012	36	36,783	6/24/24	29	34	56	10	New Construction - Initial	1/1/80
3070	16	WILMINGTON AVE SB	WALNUT ST (W)	91 FWY BRIDGE	AC	A	3	875	36	25,583	6/24/24	29	54	38	8	New Construction - Initial	1/1/80
560	2	ATLANTIC AVE NB	SPORTSMAN DR (S)	ATLANTIC DR (S)	AC	A	2	1,336	44	45,894	6/18/24	29	51	37	12	New Construction - Initial	1/1/80
3060	2	WILMINGTON AVE NB	ELECTRIC FACILITY	91 FWY BRIDGE	AC	A	2	1,051	42	35,072	6/24/24	30	31	51	18	New Construction - Initial	1/1/80
3070	17	WILMINGTON AVE SB	91 FWY BRIDGE	ELECTRIC FACILITY	AC	A	2	1,051	36	32,397	6/24/24	30	39	50	11	New Construction - Initial	1/1/80
3060	3	WILMINGTON AVE NB	91 FWY BRIDGE	WALNUT ST (W)	AC	A	3	875	36	28,095	6/24/24	30	43	41	16	New Construction - Initial	1/1/80
3060	7	WILMINGTON AVE NB	ALONDRA BLVD (W)	156TH ST (W)	AC	A	2	1,008	36	35,516	6/24/24	30	45	53	2	New Construction - Initial	1/1/80
530	4	ARTESIA BLVD EB	WILMINGTON AVE (S)	1850' E of WILMINGTON	AC	A	2	1,850	24	62,192	6/10/24	31	41	51	8	New Construction - Initial	1/1/80
840	6	CALDWELL ST (E)	TEMPLE AVE (S)	CITY LIMITS	AC	B	2	545	36	18,515	6/25/24	31	38	52	10	New Construction - Initial	1/1/80
1480	3	GREENLEAF BLVD	GREENLEAF DR	WILMINGTON AVE (S)	AC	C	2	1,085	46	47,815	6/17/24	31	35	64	1	New Construction - Initial	1/1/80
3060	12	WILMINGTON AVE NB	POPLAR ST (W)	ROSECRANS AVE (W)	AC	A	2	1,232	33	47,855	6/24/24	31	33	58	9	New Construction - Initial	1/1/80
560	1	ATLANTIC AVE NB	BRIDGE DECK	SPORTSMAN DR (S)	AC	A	2	281	40	7,470	6/25/24	31	53	37	10	New Construction - Initial	1/1/80
3070	18	WILMINGTON AVE SB	ELECTRIC FACILITY	VICTORIA ST (W)	AC	A	2	1,177	40	45,436	6/24/24	32	36	62	2	New Construction - Initial	1/1/80
3070	15	WILMINGTON AVE SB	GREENLEAF BLVD (W)	WALNUT ST (W)	AC	A	2	1,688	36	60,952	6/24/24	32	49	45	6	New Construction - Initial	1/1/80
560	3	ATLANTIC AVE NB	ATLANTIC DR (S)	BEGIN PCC	AC	A	2	572	34	8,559	6/18/24	32	60	30	10	New Construction - Initial	1/1/80
3060	10	WILMINGTON AVE NB	COMPTON BLVD (W)	PALMER ST (W)	AC	A	2	933	36	29,161	6/24/24	33	46	47	7	New Construction - Initial	1/1/80
560	7	ATLANTIC AVE NB	CITY LIMTS (S)	ROSECRANS AVE (E)	AC	A	2	252	34	10,146	6/26/24	33	40	60	0	New Construction - Initial	1/1/80
450	19	ALONDRA BLVD WB	I-710 OVERPASS	I-710 SB ON RAMP	AC	C	2	440	36	16,456	6/26/24	33	29	71	0	New Construction - Initial	1/1/80
1480	12	GREENLEAF BLVD	BUTLER AVE (S)	ATLANTIC DR (S)	AC	C	2	1,223	20	21,235	6/18/24	33	22	70	8	New Construction - Initial	1/1/80
3490	12	CENTRAL AVE SB	WALNUT ST (W)	ARTESIA BLVD (W)	AC	A	3	610	30	23,333	6/11/24	33	46	46	8	New Construction - Initial	1/1/80
550	4	ATLANTIC AVE SB	CITY LIMITS (N)	SAN VINCENTE ST (E)	AC	A	2	393	34	14,216	6/26/24	33	39	44	17	New Construction - Initial	1/1/80
1050	5	COMPTON BLVD WB	BRADFORD AVE (N)	LONG BEACH BLVD (N)	AC	A	2	1,310	37	51,014	6/26/24	33	51	41	8	New Construction - Initial	1/1/80
430	19	ALONDRA BLVD EB	I-710 SB ON RAMP	I-710 OVERPASS	AC	C	2	380	36	16,576	6/26/24	33	46	54	0	New Construction - Initial	1/1/80
3060	9	WILMINGTON AVE NB	LAUREL ST (W)	COMPTON BLVD (W)	AC	A	2	1,156	36	39,690	6/24/24	34	38	62	0	New Construction - Initial	1/1/80
3060	11	WILMINGTON AVE NB	PALMER ST (W)	POPLAR ST (W)	AC	A	2	612	32	22,744	6/24/24	34	42	50	8	New Construction - Initial	1/1/80
1730	3	LAUREL ST (E)	CHESTER AVE (S)	BURRIS AVE (S)	AC	C	2	990	32	27,144	6/26/24	34	34	66	0	Surface Treatment-Cape Seal	1/19/16
3070	11	WILMINGTON AVE SB	LAUREL ST (W)	156TH ST (W)	AC	A	2	569	36	19,990	6/24/24	34	43	52	5	New Construction - Initial	1/1/80
540	5	ARTESIA BLVD WB	ANDERSON AVE (S)	CENTRAL AVE (S)	AC	A	2	1,925	30	63,603	6/10/24	34	60	28	12	New Construction - Initial	1/1/80
560	9	ATLANTIC AVE NB	CITY LIMITS (S)	MCMILLAN ST (E)	AC	A	2	134	28	3,821	6/26/24	34	67	33	0	New Construction - Initial	1/1/80
1040	13	COMPTON BLVD EB	LONG BEACH BLVD (S)	BRADFORD AVE (S)	AC	A	2	1,315	39	47,811	6/26/24	34	44	40	16	New Construction - Initial	1/1/80
2740	10	TAMARIND AVE	ROSECRANS AVE (E)	MEALY ST (E)	PCC	C	2	795	40	33,981	6/25/24	34	13	55	32	New Construction - Initial	1/1/80
2510	1	SANTA FE AVE NB	91 FWY BRIDGE	ARTESIA BLVD (E)	AC	A	3	240	57	9,396	6/25/24	35	26	69	5	New Construction - Initial	1/1/80
3060	1	WILMINGTON AVE NB	VICTORIA AVE (W)	ELECTRIC FACILITY	AC	A	3	1,177	46	47,520	6/24/24	36	32	68	0	New Construction - Initial	1/1/80
3060	4	WILMINGTON AVE NB	WALNUT ST (W)	GREENLEAF BLVD (W)	AC	A	3	1,697	34	60,202	6/24/24	36	39	57	4	New Construction - Initial	1/1/80
1900	4	MATTHISEN AVE (N)	POPLAR ST (W)	SPRUCE ST (W)	AC	B	2	953	26	32,111	6/18/24	36	42	58	0	New Construction - Initial	1/1/80
550	9	ATLANTIC AVE SB	SPORTSMAN DR (S)	BRIDGE DECK	AC	A	2	281	40	7,911	6/25/24	36	54	38	8	New Construction - Initial	1/1/80
1900	3	MATTHISEN AVE (N)	ARBUTUS ST (W)	POPLAR ST (W)	AC	B	2	286	26	7,304	6/18/24	37	28	64	8	New Construction - Initial	1/1/80
920	1	CENTER AVE (S)	GREENLEAF BLVD (W)	BENNETT ST (W)	AC	C	2	517	36	10,534	4/12/24	37	21	70	9	New Construction - Initial	1/1/80
2740	12	TAMARIND AVE	WILLOWBROOK AVE (N)	CARSON PL (E)	AC	C	2	546	30	23,667	6/4/24	38	72	28	0	New Construction - Initial	1/1/80
2500	12	SANTA FE AVE SB	ARTESIA BLVD (E)	CITY LIMIT (S)	AC	A	3	245	42	7,244	6/25/24	38	26	67	7	New Construction - Initial	1/1/80
2430	19	ROSECRANS AVE WB	ROSECRANS AVE (OFF RAMP)	ALAMEDA ST NB	AC	B	2	820	15	9,747	6/25/24	38	27	49	24	New Construction - Initial	1/1/80
550	8	ATLANTIC AVE SB	ATLANTIC DR (S)	SPORTSMAN DR (S)	AC	A	2	1,336	35	46,344	6/25/24	38	47	44	9	New Construction - Initial	1/1/80
550	2	ATLANTIC AVE SB	CITY LIMITS (N)	ROSECRANS AVE (E)	AC	A	2	164	34	5,582	6/26/24	38	70	30	0	New Construction - Initial	1/1/80
3060	8	WILMINGTON AVE NB	156TH ST (W)	LAUREL ST (W)	AC	A	2	570	36	21,318	6/24/24	39	45	55	0	New Construction - Initial	1/1/80
3070	10	WILMINGTON AVE SB	COMPTON BLVD (W)	LAUREL ST (W)	AC	A	2	1,156	40	39,493	6/24/24	39	42	48	10	New Construction - Initial	1/1/80
530	1	ARTESIA BLVD EB	CENTRAL AVE (S)	1285' E of CENTRAL AVE	AC	A	2	1,285	24	49,982	6/10/24	39	59	40	1	New Construction - Initial	1/1/80
920	2	CENTER AVE (S)	BENNETT ST (W)	CALDWELL ST (W)	AC	C	2	658	36	12,748	4/12/24	39	17	65	18	Surface Treatment-Cape Seal	1/19/16
330	4	ALAMEDA ST SB	AUTO DR (S)	GREENLEAF BLVD (E)	AC	B	4	1,405	46	84,323	6/19/24	39	24	64	12	New Construction - Initial	1/1/80
3070	7	WILMINGTON AVE SB	ROSECRANS AVE (W)	POPLAR ST (W)	AC	A	2	1,232	33	41,925	6/24/24	40	47	34	19	New Construction - Initial	1/1/80
1480	8	GREENLEAF BLVD	ALAMEDA ST (S)	MAYO AVE (S)	AC	C	2	1,780	55	73,990	6/10/24	41	39	60	1	New Construction - Initial	1/1/80
1040	1	COMPTON BLVD EB	CITY LIMITS (W)	APRILLA AVE (S)	AC	A	2	1,170	35	78,472	6/17/24	41	43	56	1	New Construction - Initial	1/1/80
530	3	ARTESIA BLVD EB	2580' E of CENTRAL AVE	WILMINGTON AVE (S)	AC	A	2	1,285	24	46,533	6/10/24	42	50	34	16	New Construction - Initial	1/1/80
3040	3	WILLOWBROOK AVE (N) SB	ROSECRANS AVE (W)	ELM ST (W)	AC	B	2	1,015	25	19,649	6/18/24	43	31	64	5	New Construction - Initial	1/1/80
550	7	ATLANTIC AVE SB	ALONDRA BLVD (E)	ATLANTIC DR (S)	AC	A	2	572	34	17,358	6/25/24	43	53	44	3	New Construction - Initial	1/1/80
320	8	ALAMEDA ST NB	ELM ST (E)	ROSECRANS AVE (E)	AC	B	2	967	46	42,925	6/24/24	43	50	49	1	New Construction - Initial	1/1/80
530	2	ARTESIA BLVD EB	1285' E of CENTRAL AVE	2570' E of CENTRAL AVE	AC	A	2	1,285	24	38,137	6/10/24	44	61	38	1	New Construction - Initial	1/1/80
3040	5	WILLOWBROOK AVE (N) SB	SCHOOL ST (W)	COMPTON BLVD (W)	AC	B	2	582	26	12,333	2/29/24	44	52	45	3	New Construction - Initial	1/1/80
1480	9	GREENLEAF BLVD	MAYO AVE (S)	345' E of BURRIS AVE (S)	AC	C	2	940	40	37,184	6/10/24	44	48	52	0	New Construction - Initial	1/1/80
2430	18	ROSECRANS AVE WB	ALAMEDA ST OVERPASS	WILLOWBROOK AVE (S)	AC	B	2	538	25	18,620	6/19/24	44	50	44	6	New Construction - Initial	1/1/80
3070	14	WILMINGTON AVE SB	CALDWELL ST (W)	GREENLEAF BLVD (W)	AC	A	2	1,185	32	32,120	6/24/24	44	32	64	4	New Construction - Initial	1/1/80

BranchID	Sec ID	Name	From	To	Surface Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
830	10	CALDWELL ST (W)	OLEANDER AVE (S)	END	AC	B	2	404	36	14,204	6/12/24	44	16	83	1	Cape Seal	1/1/15
2410	3	ROSECRANS AVE EB	NESTOR AVE (N)	TAJAUTA AVE (N)	AC	B	2	754	31	23,611	6/19/24	45	14	56	30	New Construction - Initial	1/1/80
3060	5	WILMINGTON AVE NB	GREENLEAF BLVD (W)	CALDWELL ST (W)	AC	A	2	1,197	28	30,110	6/24/24	45	40	50	10	New Construction - Initial	1/1/80
840	5	CALDWELL ST (E)	BURRIS AVE (S)	TEMPLE AVE (S)	AC	B	2	889	36	31,256	6/25/24	45	38	62	0	Surface Treatment - Slurry Seal	1/19/16
1040	2	COMPTON BLVD EB	APRILLA AVE (S)	CENTRAL AVE (S)	AC	A	2	1,320	32	91,479	6/17/24	45	36	48	16	New Construction - Initial	1/1/80
3070	8	WILMINGTON AVE SB	POPLAR ST (W)	BRAZIL ST (W)	AC	A	2	612	33	20,674	6/24/24	46	33	47	20	New Construction - Initial	1/1/80
1870	5	MANVILLE ST (W)	PACIFIC ELECTRIC RR	ALAMEDA ST (S)	AC	C	4	1,175	57	55,024	4/5/24	46	12	83	5	New Construction - Initial	1/1/80
3510	2	LONG BEACH BLVD SB	ARLINGTON ST (E)	EZMIRLIAN ST (E)	AC	A	2	1,065	31	35,133	6/19/24	46	53	34	13	New Construction - Initial	1/1/80
3060	6	WILMINGTON AVE NB	CALDWELL ST (W)	ALONDRA BLVD (W)	AC	A	2	1,696	26	44,151	6/24/24	47	45	48	7	New Construction - Initial	1/1/80
3040	1	WILLOWBROOK AVE (N) SB	CITY LIMITS (N)	DOUGLAS ST (W)	AC	B	2	1,140	29	29,746	6/18/24	47	32	50	18	New Construction - Initial	1/1/80
1810	5	MAGNOLIA ST (W)	KEMP AVE (N)	WILMINTON AVE (N)	AC	C	2	657	25	16,249	6/11/24	48	40	26	34	New Construction - Initial	1/1/80
530	6	ARTESIA BLVD EB	ACACIA AVE	RR TRACK OVERPASS	AC	A	2	748	22	17,887	6/10/24	48	35	65	0	New Construction - Initial	1/1/80
1900	5	MATTHISEN AVE (N)	SPRUCE ST (W)	CHERRY ST (W)	AC	B	2	493	26	11,329	6/18/24	49	36	64	0	New Construction - Initial	1/1/80
1820	1	MAHALO PL (W)	CITY LIMITS	MAHALO PL (S)	AC	C	2	1,423	32	59,595	6/11/24	49	53	36	11	New Construction - Initial	1/1/80
540	10	ARTESIA BLVD WB	RR TRACKS OVERPASS	ACACIA AVE	AC	A	2	756	22	15,638	6/10/24	50	19	81	0	New Construction - Initial	1/1/80
1480	10	GREENLEAF BLVD	LONG BEACH BLVD (S)	MURIEL AVE (S)	AC	C	2	1,271	20	23,896	6/18/24	50	26	74	0	New Construction - Initial	1/1/80
540	1	ARTESIA BLVD WB	ALAMEDA ST OVERPASS	RR TRACKS OVERPASS	AC	A	4	885	22	22,383	6/10/24	51	29	71	0	New Construction - Initial	1/1/80
1480	11	GREENLEAF BLVD	MURIEL AVE (S)	BUTLER AVE (S)	AC	C	2	1,253	20	23,083	6/18/24	51	22	73	5	New Construction - Initial	1/1/80
3030	7	WILLOWBROOK AVE (S) NB	COMPTON BLVD (W)	TAMARIND AVE	AC	B	2	735	40	18,665	6/4/24	52	45	54	1	New Construction - Initial	1/1/80
450	9	ALONDRA BLVD WB	ALAMEDA ST (S)	WILLOWBROOK AVE (S)	AC	C	2	1,270	34	40,050	3/8/24	52	54	46	0	New Construction - Initial	1/1/80
1050	14	COMPTON BLVD WB	DWIIGHT AVE (N)	TAJAUTA AVE (N)	AC	A	2	1,320	26	31,059	6/17/24	52	31	68	1	New Construction - Initial	1/1/80
3290	5	LAUREL ST (W)	CENTER AVE (S)	WILMINGTON AVE (S)	AAC	C	2	866	32	36,517	4/12/24	52	52	48	0	Overlay - AC Structural	1/18/11
3510	3	LONG BEACH BLVD SB	EZMIRLIAN ST (E)	ROSECRANS AVE (E)	AC	A	2	1,090	31	34,395	6/25/24	53	69	30	1	New Construction - Initial	1/1/80
3510	1	LONG BEACH BLVD SB	CITY LIMITS (N)	ARLINGTON ST (E)	AC	A	2	750	31	23,724	6/19/24	53	44	46	10	New Construction - Initial	1/1/80
320	10	ALAMEDA ST NB	1450' N of ROSECRANS	PINE ST (E)	AC	B	2	1,290	46	61,394	6/17/24	53	59	30	11	New Construction - Initial	1/1/80
560	8	ATLANTIC AVE NB	ROSECRANS AVE (E)	CITY LIMIT (N)	AC	A	2	164	34	4,219	6/26/24	53	100	0	0	New Construction - Initial	1/1/80
320	9	ALAMEDA ST NB	ROSECRANS AVE (E)	1450' N of ROSECRANS	AC	B	2	1,450	46	61,870	6/24/24	53	45	52	3	New Construction - Initial	1/1/80
1050	12	COMPTON BLVD WB	ARANBE AVE (N)	WILMINGTON AVE (N)	AC	A	2	1,720	28	49,222	6/17/24	53	46	41	13	New Construction - Initial	1/1/80
330	2	ALAMEDA ST SB	MANVILLE ST (E)	ARTESIA BLVD (E)	AC	B	4	1,337	46	59,268	6/11/24	53	58	35	7	New Construction - Initial	1/1/80
1050	2	COMPTON BLVD WB	CITY LIMITS (E)	HARRIS AVE (S)	AC	A	2	145	38	4,248	6/26/24	54	38	58	4	New Construction - Initial	1/1/80
2430	9	ROSECRANS AVE WB	EAST CITY LIMITS (E/ GIBSON)	WEST CITY LIMITS (E/ FRAILEY AVE)	AC	B	2	860	28	26,689	6/26/24	54	26	47	27	New Construction - Initial	1/1/80
550	3	ATLANTIC AVE SB	ROSECRANS AVE (E)	CITY LIMITS (S)	AC	A	2	252	34	8,222	6/26/24	55	48	52	0	New Construction - Initial	1/1/80
550	1	ATLANTIC AVE SB	MCMILLAN ST (E)	CITY LIMITS (S)	APC	A	2	134	34	2,864	6/26/24	55	36	64	0	New Construction - Initial	1/1/80
3070	9	WILMINGTON AVE SB	BRAZIL ST (W)	COMPTON BLVD (W)	AC	A	2	933	35	31,466	6/24/24	55	33	54	13	New Construction - Initial	1/1/80
3030	9	WILLOWBROOK AVE (S) NB	ELM ST (E)	ROSECRANS AVE (E)	AC	B	2	990	40	31,918	6/4/24	55	35	58	7	New Construction - Initial	1/1/80
2430	5	ROSECRANS AVE WB	DWIGHT AVE (N)	TAJAUTA AVE (N)	AC	B	2	1,344	30	38,814	6/19/24	56	21	67	12	New Construction - Initial	1/1/80
2410	18	ROSECRANS AVE EB	WILLOWBROOK AVE (S)	ALAMEDA ST OVERPASS	AC	B	2	538	25	16,975	6/19/24	56	75	23	2	New Construction - Initial	1/1/80
2430	20	ROSECRANS AVE WB	ALAMEDA ST SB	ROSECRANS AVE (ON RAMP)	AC	B	2	830	15	13,062	6/25/24	56	22	48	30	New Construction - Initial	1/1/80
1780	8	LONG BEACH BLVD NB	EZMIRLIAN ST (E)	ARLINGTON ST (E)	AC	A	2	1,066	34	34,931	6/19/24	57	62	20	18	New Construction - Initial	1/1/80
530	7	ARTESIA BLVD EB	RR TRACK OVERPASS	ALAMEDA ST OVERPASS	AC	A	2	895	22	29,675	6/10/24	57	37	59	4	New Construction - Initial	1/1/80
1040	8	COMPTON BLVD EB	ACACIA AVE (S)	WILLOWBROOK AVE (S)	AC	A	2	670	32	21,431	5/30/24	57	39	54	7	New Construction - Initial	1/1/80
1810	4	MAGNOLIA ST (W)	DWIGHT AVE (N)	KEMP AVE (N)	AC	C	2	670	25	16,933	6/11/24	58	66	5	29	New Construction - Initial	1/1/80
920	5	CENTER AVE (S)	ALONDRA BLVD (W)	CYPRESS ST (W)	AAC	C	2	641	36	30,803	4/12/24	58	49	49	2	Overlay - AC Structural	1/18/11
1780	6	LONG BEACH BLVD NB	ELM ST (E)	ROSECRANS AVE (E)	AC	A	2	1,360	32	41,843	6/19/24	58	57	27	16	New Construction - Initial	1/1/80
3510	4	LONG BEACH BLVD SB	ROSECRANS AVE (E)	ELM ST (E)	AC	A	2	1,360	28	38,806	6/25/24	58	43	32	25	New Construction - Initial	1/1/80
1730	4	LAUREL ST (E)	BURRIS AVE (S)	LONG BEACH BLVD (S)	AC	C	2	1,077	32	31,120	6/26/24	58	37	55	8	Surface Treatment - Slurry Seal	1/19/16
2410	20	ROSECRANS AVE EB	ALAMEDA ST NB	ROSECRANS AVE (ON RAMP)	AC	B	2	899	15	11,699	6/25/24	59	55	43	2	New Construction - Initial	1/1/80
3030	6	WILLOWBROOK AVE (S) NB	MYRRH ST (E)	COMPTON BLVD (W)	AC	B	2	1,365	32	35,675	6/5/24	59	36	58	6	New Construction - Initial	1/1/80
1780	9	LONG BEACH BLVD NB	ARLINGTON ST (E)	CITY LIMITS (N)	AC	A	2	750	32	24,824	6/19/24	60	62	22	16	New Construction - Initial	1/1/80
2410	6	ROSECRANS AVE EB	WILMINGTON AVE (N)	ARANBE AVE (N)	AC	B	2	1,711	29	50,189	6/19/24	60	38	60	2	New Construction - Initial	1/1/80
530	8	ARTESIA BLVD EB	ALAMEDA ST OVERPASS	SANTA FE AVE	AC	A	2	570	34	22,409	6/25/24	60	55	45	0	New Construction - Initial	1/1/80
540	6	ARTESIA BLVD WB	SANTA FE AVE (S)	ALAMEDA ST OVERPASS	AC	A	4	570	34	19,791	6/25/24	60	61	39	0	New Construction - Initial	1/1/80
330	1	ALAMEDA ST SB	CITY LIMITS (S)	MANVILLE ST (E)	AC	B	4	397	46	27,717	6/11/24	61	91	5	4	New Construction - Initial	1/1/80
430	21	ALONDRA BLVD EB	ATLANTIC AVE	END PCC	PCC	C	2	140	30	4,539	6/26/24	61	70	0	30	New Construction - Initial	1/1/80
1240	12	EL SEGUNDO BLVD (W)	PARMELEE AVE (N)	CITY LIMITS	AC	A	2	1,356	30	41,827	5/28/24	61	41	52	7	New Construction - Initial	1/1/80
1780	7	LONG BEACH BLVD NB	ROSECRANS AVE (E)	EZMIRLIAN ST (E)	AC	A	2	1,090	34	33,548	6/19/24	61	64	29	7	New Construction - Initial	1/1/80
2430	4	ROSECRANS AVE WB	WILMINGTON AVE (N)	DWIGHT AVE (N)	AC	B	2	1,294	30	37,626	6/19/24	62	29	50	21	New Construction - Initial	1/1/80
3510	5	LONG BEACH BLVD SB	ELM ST (E)	COMPTON BLVD (E)	AC	A	2	1,340	28	41,223	6/25/24	62	53	32	15	New Construction - Initial	1/1/80
730	2	BRADFIELD AVE (N)	SAN VINCENTE ST (E)	ROSECRANS AVE (E)	AC	C	2	1,512	36	43,401	6/4/24	62	23	71	6	Complete Reconstruction - AC	3/31/20
1730	2	LAUREL ST (E)	WILLOW AVE (S)	CHESTER AVE (S)	AC	C	2	823	32	22,110	6/10/24	63	56	37	7	Surface Treatment - Slurry Seal	1/19/16

BranchID	Sec ID	Name	From	To	Surface Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
300	9	ACACIA AVE	MYRRH ST (W)	COMPTON BLVD (W)	AAC	C	4	1,390	60	74,604	6/5/24	63	32	67	1	Overlay - AC Structural	6/2/10
2500	11	SANTA FE AVE SB	AUTO DRIVE (S)	ARTESIA BLVD (E)	AC	A	2	1,180	32	56,491	3/7/24	63	49	51	0	New Construction - Initial	1/1/80
330	3	ALAMEDA ST SB	ARTESIA BLVD (E)	AUTO DR (S)	AC	B	4	1,176	46	73,222	6/19/24	64	41	59	0	New Construction - Initial	1/1/80
3510	6	LONG BEACH BLVD SB	COMPTON BLVD (E)	MYRRH ST (E)	AC	A	2	1,330	28	36,739	6/25/24	64	37	61	2	New Construction - Initial	1/1/80
1040	4	COMPTON BLVD EB	TAJAUTA AVE (S)	DWIGHT AVE (S)	AC	A	2	1,310	32	40,273	6/17/24	64	28	36	36	New Construction - Initial	1/1/80
920	6	CENTER AVE (S)	CYPRESS ST (W)	LAUREL ST (W)	AAC	C	2	1,108	36	40,434	4/12/24	64	64	36	0	Overlay - AC Structural	1/18/11
1050	15	COMPTON BLVD WB	TAJAUTA AVE (N)	CENTRAL AVE (N)	AC	A	2	1,640	26	40,375	6/17/24	65	28	66	6	New Construction - Initial	1/1/80
1040	7	COMPTON BLVD EB	ARANBE AVE (N)	ACACIA AVE (S)	AC	A	2	1,625	28	45,197	5/30/24	65	64	31	5	New Construction - Initial	1/1/80
1900	6	MATTHISEN AVE (N)	CHERRY ST (W)	CITY LIMITS	AC	B	2	857	26	22,963	6/18/24	65	100	0	0	New Construction - Initial	1/1/80
2430	6	ROSECRANS AVE WB	TAJAUTA AVE (N)	NESTOR AVE (N)	AC	B	2	754	30	22,262	6/19/24	65	39	61	0	New Construction - Initial	1/1/80
1040	5	COMPTON BLVD EB	DWIGHT AVE (S)	WILMINGTON AVE (S)	AC	A	2	1,310	30	37,741	6/17/24	65	23	53	24	New Construction - Initial	1/1/80
2430	7	ROSECRANS AVE WB	NESTOR AVE (N)	CENTRAL AVE (N)	AC	B	2	1,254	30	45,007	6/19/24	65	24	67	9	New Construction - Initial	1/1/80
330	11	ALAMEDA ST SB	ROSECRANS AVE (E)	MEALY ST (E)	AC	B	4	816	58	43,590	6/19/24	66	27	49	24	New Construction - Initial	1/1/80
320	4	ALAMEDA ST NB	CALDWELL ST (E)	ALONDRA BLVD (E)	AC	B	2	1,260	40	47,201	6/10/24	66	41	41	18	New Construction - Initial	1/1/80
560	10	ATLANTIC AVE NB	BEGIN PCC (300' S/ ALONDRA BLVD)	ALONDRA BLVD	PCC	A	2	310	32	13,281	6/26/24	66	66	5	29	New Construction - Initial	1/1/80
3510	8	LONG BEACH BLVD SB	ALONDRA BLVD (E)	CALDWELL ST (E)	AC	A	2	1,385	34	45,502	6/25/24	67	53	39	8	New Construction - Initial	1/1/80
3030	2	WILLOWBROOK AVE (S) NB	JOHNSON ST (E)	TICHENOR ST (E)	AC	B	2	730	30	20,788	6/12/24	67	36	64	0	New Construction - Initial	1/1/80
3030	5	WILLOWBROOK AVE (S) NB	CYPRESS ST (E)	MYRRH ST (E)	AC	B	2	780	30	22,080	6/5/24	67	45	55	0	New Construction - Initial	1/1/80
3490	4	CENTRAL AVE SB	200' N ROSECRANS AVE	ROSECRANS AVE (W)	PCC	A	2	200	35	9,732	4/15/24	67	8	46	46	New Construction - Initial	1/1/80
1780	1	LONG BEACH BLVD NB	CITY LIMITS (S)	CALDWELL ST (E)	AC	A	2	1,373	32	45,022	6/25/24	68	56	41	3	New Construction - Initial	1/1/80
3040	7	WILLOWBROOK AVE (N) SB	MYRRH ST (W)	ALONDRA BLVD (W)	AC	B	2	1,373	27	31,869	6/5/24	68	56	34	10	New Construction - Initial	1/1/80
1050	11	COMPTON BLVD WB	ACACIA AVE (N)	ARANBE AVE (N)	AC	A	2	1,620	32	44,456	5/30/24	68	53	32	15	New Construction - Initial	1/1/80
1040	6	COMPTON BLVD EB	WILMINGTON AVE (S)	ARANBE AVE (N)	AC	A	2	1,715	28	43,623	6/17/24	68	45	36	19	New Construction - Initial	1/1/80
3030	1	WILLOWBROOK AVE (S) NB	GREENLEAF BLVD (W)	JOHNSON ST (E)	AC	B	2	910	30	24,327	6/12/24	68	35	65	0	New Construction - Initial	1/1/80
1780	3	LONG BEACH BLVD NB	ALONDRA BLVD (E)	MYRRH ST (E)	AC	A	2	1,363	31	42,531	6/25/24	69	56	32	12	New Construction - Initial	1/1/80
430	18	ALONDRA BLVD EB	ATLANTIC AVE (S)	I-710 SB ON RAMP	AC	C	2	612	30	19,928	6/26/24	69	45	55	0	New Construction - Initial	1/1/80
1040	3	COMPTON BLVD EB	CENTRAL AVE (S)	TAJAUTA AVE (S)	AC	A	2	1,640	32	49,963	6/17/24	69	26	34	40	New Construction - Initial	1/1/80
2740	1	TAMARIND AVE	GREENLEAF BLVD (E)	CALDWELL ST (E)	AAC	C	2	1,225	40	42,487	6/12/24	69	85	15	0	Overlay - AC Structural	6/2/10
1780	4	LONG BEACH BLVD NB	MYRRH ST (E)	COMPTON BLVD (E)	AC	A	2	1,330	32	41,533	6/25/24	69	50	34	16	New Construction - Initial	1/1/80
3040	2	WILLOWBROOK AVE (N) SB	DOUGLAS ST (W)	ROSECRANS AVE (W)	AC	B	2	834	30	21,096	6/18/24	69	49	51	0	New Construction - Initial	1/1/80
320	3	ALAMEDA ST NB	GREENLEAF BLVD (E)	CALDWELL ST (E)	AC	B	2	1,454	39	57,600	6/10/24	70	52	36	12	New Construction - Initial	1/1/80
1240	1	EL SEGUNDO BLVD (W)	CITY LIMITS	PARMELEE AVE (N)	AC	A	2	1,356	30	46,469	5/28/24	70	56	38	6	New Construction - Initial	1/1/80
3510	7	LONG BEACH BLVD SB	MYRRH ST (E)	ALONDRA BLVD (E)	AC	A	2	1,365	29	40,386	6/25/24	70	56	44	0	New Construction - Initial	1/1/80
330	12	ALAMEDA ST SB	MEALY ST (E)	CITY LIMITS (N)	AC	B	4	1,190	58	63,886	6/19/24	70	45	40	15	New Construction - Initial	1/1/80
2410	19	ROSECRANS AVE EB	ROSECRANS AVE (OFF RAMP)	ALAMEDA ST SB	AC	B	2	830	15	12,032	6/4/24	70	60	40	0	New Construction - Initial	1/1/80
3510	9	LONG BEACH BLVD SB	CALDWELL ST (E)	CITY LIMITS (S)	AC	A	2	1,375	34	42,070	6/25/24	70	55	35	10	New Construction - Initial	1/1/80
320	5	ALAMEDA ST NB	ALONDRA BLVD (E)	MYRRH ST (E)	AC	B	2	1,365	46	59,612	6/10/24	71	63	29	8	New Construction - Initial	1/1/80
1780	5	LONG BEACH BLVD NB	COMPTON BLVD (E)	ELM ST (E)	AC	A	2	1,340	31	38,232	6/19/24	71	54	37	9	New Construction - Initial	1/1/80
2410	7	ROSECRANS AVE EB	ARANNBE AVE (N)	ACACIA AVE (N)	AC	B	2	1,476	30	42,719	6/19/24	71	37	56	7	New Construction - Initial	1/1/80
3040	9	WILLOWBROOK AVE (N) SB	TICHENOR ST (W)	GREENLEAF BLVD (W)	AC	B	2	1,535	28	37,736	6/12/24	71	66	34	0	New Construction - Initial	1/1/80
3070	13	WILMINGTON AVE SB	ALONDRA BLVD (W)	CALDWELL ST (W)	AC	A	2	1,685	31	53,363	6/24/24	71	61	39	0	New Construction - Initial	1/1/80
2410	5	ROSECRANS AVE EB	DWIGHT AVE (N)	WILMINGTON AVE (N)	AC	B	2	1,294	30	38,905	6/19/24	71	24	54	22	New Construction - Initial	1/1/80
3040	8	WILLOWBROOK AVE (N) SB	ALONDRA BLVD (W)	TICHENOR ST (W)	AC	B	2	1,238	27	32,734	6/12/24	71	63	37	0	New Construction - Initial	1/1/80
1780	2	LONG BEACH BLVD NB	CALDWELL ST (E)	ALONDRA BLVD (E)	AC	A	2	1,387	35	49,428	6/25/24	72	47	42	11	New Construction - Initial	1/1/80
2430	3	ROSECRANS AVE WB	ARANBE AVE (N)	WILMINGTON AVE (N)	AC	B	2	1,711	30	50,058	6/19/24	72	17	79	4	New Construction - Initial	1/1/80
1050	13	COMPTON BLVD WB	WILMINGTON AVE (N)	DWIGHT AVE (N)	AC	A	2	1,310	26	34,776	6/17/24	72	38	43	19	New Construction - Initial	1/1/80
1870	4	MANVILLE ST (W)	ACACIA AVE (S)	PACIFIC ELECTRIC RR	AC	C	4	920	57	44,600	4/5/24	72	20	75	5	New Construction - Initial	1/1/80
300	8	ACACIA AVE	ALONDRA BLVD (W)	MYRRH ST (W)	AC	C	2	1,305	40	49,305	6/5/24	72	66	34	0	New Construction - Initial	1/1/80
2740	3	TAMARIND AVE	ALONDRA BLVD (E)	MYRRH ST (E)	AAC	C	2	1,375	40	49,432	6/5/24	73	84	7	9	Overlay - AC Structural	6/2/10
1240	7	EL SEGUNDO BLVD (W)	WILMINGTON AVE (N)	GRANDEE AVE (N)	AC	A	2	1,277	30	46,805	5/29/24	73	58	42	0	New Construction - Initial	1/1/80
1240	11	EL SEGUNDO BLVD (W)	END PCC	PARMELEE AVE (N)	AC	A	2	998	30	32,496	5/28/24	73	53	28	19	New Construction - Initial	1/1/80
2430	2	ROSECRANS AVE WB	ACACIA AVE (N)	ARANBE AVE (N)	AC	B	2	1,476	30	43,856	6/19/24	73	38	25	37	New Construction - Initial	1/1/80
1240	6	EL SEGUNDO BLVD (W)	GRANDEE AVE (N)	WILMINGTON AVE (N)	AC	A	2	1,233	30	43,602	5/29/24	73	49	51	0	New Construction - Initial	1/1/80
320	6	ALAMEDA ST NB	MYRRH ST (E)	COMPTON BLVD (E)	AC	B	2	1,356	46	56,334	6/10/24	73	42	39	19	New Construction - Initial	1/1/80
1480	6	GREENLEAF BLVD	OLEANDER AVE (S)	WILLOWBROOK AVE (S)	AAC	C	3	1,345	52	67,552	6/17/24	74	51	49	0	Overlay - AC Structural	10/16/10
2410	17	ROSECRANS AVE EB	WEST CITY LIMIT (W/ FRAILEY)	EAST CITY LIMITS (E/ GIBSON)	AC	B	2	750	40	31,578	6/26/24	74	65	34	1	New Construction - Initial	1/1/89
3030	10	WILLOWBROOK AVE (S) NB	MONA BLVD (N)	CITY LIMITS (N)	AC	B	2	1,942	30	61,678	6/4/24	74	49	51	0	New Construction - Initial	1/1/80
330	5	ALAMEDA ST SB	GREENLEAF BLVD (E)	CALDWELL ST (E)	AC	B	4	1,237	60	68,025	6/19/24	74	31	56	13	New Construction - Initial	1/1/80
330	6	ALAMEDA ST SB	CALDWELL ST (E)	ALONDRA BLVD (E)	AC	B	4	1,455	60	76,868	6/19/24	74	37	27	36	New Construction - Initial	1/1/80
2410	8	ROSECRANS AVE EB	ACACIA AVE (N)	WILLOWBROOK AVE (N)	AC	B	2	630	31	22,799	6/19/24	74	23	57	20	New Construction - Initial	1/1/80

BranchID	Sec ID	Name	From	To	Surface Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1810	6	MAGNOLIA ST (W)	PAULSEN AVE (N)	MATTHISEN AVE (N)	AC	C	2	557	32	14,125	2/29/24	74	86	0	14	New Construction - Initial	1/1/80
330	7	ALAMEDA ST SB	ALONDRA BLVD (E)	MYRRH ST (E)	AC	B	4	1,423	60	71,475	6/19/24	75	39	16	45	New Construction - Initial	1/1/80
1240	3	EL SEGUNDO BLVD (W)	BEGIN PCC	COMPTON AVE (N)	PCC	A	3	300	30	14,338	5/29/24	75	44	18	38	New Construction - Initial	1/1/80
320	7	ALAMEDA ST NB	COMPTON BLVD (E)	ELM ST (E)	AC	B	2	1,731	46	73,903	6/24/24	76	69	15	16	New Construction - Initial	1/1/80
330	10	ALAMEDA ST SB	ELM ST (E)	ROSECRANS AVE (E)	AC	B	4	971	60	50,119	6/19/24	76	39	18	43	New Construction - Initial	1/1/80
1050	10	COMPTON BLVD WB	WILLOWBROOK AVE (N)	ACACIA AVE (N)	AC	A	2	660	26	16,205	5/30/24	76	52	22	26	New Construction - Initial	1/1/80
1480	7	GREENLEAF BLVD	WILLOWBROOK AVE (S)	ALAMEDA ST (S)	AAC	C	3	1,630	60	76,009	6/17/24	76	91	8	1	Overlay - AC Structural	10/16/10
2740	2	TAMARIND AVE	CLADWELL ST (E)	ALONDRA BLVD (E)	AAC	C	2	1,460	40	52,433	6/12/24	76	91	9	0	Overlay - AC Structural	6/2/10
1240	2	EL SEGUNDO BLVD (W)	PARMELEE AVE (N)	BEGIN PCC	AC	A	2	812	30	27,393	5/28/24	76	66	34	0	New Construction - Initial	1/1/80
1810	7	MAGNOLIA ST (W)	MATTHISEN AVE (N)	ARANBE AVE	AC	C	2	607	32	15,913	2/29/24	76	100	0	0	New Construction - Initial	1/1/80
840	1	CALDWELL ST (E)	WILLOWBROOK AVE (S)	ALAMEDA ST (S)	AC	B	2	1,417	36	37,509	6/12/24	76	58	42	0	New Construction - Initial	1/1/80
2410	2	ROSECRANS AVE EB	CENTRAL AVE (N)	NESTOR AVE (N)	AC	B	3	1,254	37	37,475	6/19/24	76	32	66	2	New Construction - Initial	1/1/80
1810	8	MAGNOLIA ST (W)	ARANBE AVE (N)	OLEANDER AVE (S)	AC	C	2	945	32	24,707	2/29/24	77	57	26	17	New Construction - Initial	1/1/80
2430	8	ROSECRANS AVE WB	CENTRAL AVE (N)	CITY LIMITS (W)	AC	B	3	617	45	22,154	6/19/24	77	41	53	6	New Construction - Initial	1/1/80
3040	4	WILLOWBROOK AVE (N) SB	ELM ST (W)	SCHOOL ST (W)	AC	B	2	1,150	26	26,472	6/18/24	77	79	20	1	New Construction - Initial	1/1/80
3030	4	WILLOWBROOK AVE (S) NB	ALONDRA BLVD (W)	CYPRESS ST (E)	AC	B	2	575	30	17,254	6/5/24	77	64	36	0	New Construction - Initial	1/1/80
330	9	ALAMEDA ST SB	COMPTON BLVD (E)	ELM ST (E)	AC	B	4	1,731	60	84,251	6/19/24	77	38	25	37	New Construction - Initial	1/1/80
1240	8	EL SEGUNDO BLVD (W)	GRANDEE AVE (N)	BEGIN PCC	AC	A	2	701	30	25,688	5/29/24	77	54	42	4	New Construction - Initial	1/1/80
2010	2	MYRRH ST (E)	WILLOW AVE (S)	CHESTER AVE (S)	AC	B	2	816	36	19,493	3/7/24	77	15	84	1	New Construction - Initial	1/1/80
2500	5	SANTA FE AVE SB	ELM ST (E)	COMPTON BLVD (E)	AAC	A	2	1,760	36	63,198	3/7/24	78	58	42	0	Overlay - AC Structural	10/16/10
2410	4	ROSECRANS AVE EB	TAJAUTA AVE (N)	DWIGHT AVE (N)	AC	B	2	1,344	30	41,647	6/19/24	78	31	58	11	New Construction - Initial	1/1/80
1030	5	COMPTON AVE	EL SEGUNDO BLVD	END PCC N/ EL SEGUNDO BLVD	PCC	C	2	215	60	9,556	5/29/24	78	23	20	57	New Construction - Initial	1/1/80
430	17	ALONDRA BLVD EB	315' W of ATLANTIC (S)	ATLANTIC AVE (S)	PCC	C	3	315	33	14,421	6/25/24	78	34	23	43	New Construction - Initial	1/1/80
1240	5	EL SEGUNDO BLVD (W)	END PCC	GRANDEE AVE (N)	AC	A	2	823	30	29,420	5/29/24	79	64	36	0	New Construction - Initial	1/1/80
830	11	CALDWELL ST (W)	END (W)	WILLOWBROOK AVE (S)	AC	B	2	778	36	27,937	6/12/24	79	66	34	0	New Construction - Initial	1/1/80
2410	1	ROSECRANS AVE EB	CITY LIMITS (W)	CENTRAL AVE (N)	AC	B	3	617	38	22,919	6/19/24	79	32	53	15	New Construction - Initial	1/1/80
1240	10	EL SEGUNDO BLVD (W)	COMPTON AVE (N)	END PCC	PCC	A	2	114	30	3,809	5/29/24	79	56	0	44	New Construction - Initial	1/1/80
1240	4	EL SEGUNDO BLVD (W)	COMPTON AVE (N)	END PCC	PCC	A	2	114	30	5,431	5/29/24	79	63	0	37	New Construction - Initial	1/1/80
330	19	ALAMEDA ST SB	CITY LIMITS (N)	WEBER AVE (E)	AC	B	4	916	55	52,444	6/25/24	79	42	41	17	New Construction - Initial	1/1/80
1480	5	GREENLEAF BLVD	CENTER AVE (S)	OLEANDER AVE (S)	AAC	C	3	1,365	60	64,810	6/17/24	79	84	16	0	Overlay - AC Structural	10/16/10
1480	4	GREENLEAF BLVD	WILMINGTON AVE (S)	CENTER AVE (S)	AAC	C	3	1,310	60	58,295	6/17/24	80	89	10	1	Overlay - AC Structural	10/16/10
3060	13	WILMINGTON AVE NB	ROSECRANS AVE (W)	CRESSEY ST (W)	AC	A	2	758	32	24,002	6/24/24	80	59	41	0	Complete Reconstruction - AC	1/1/17
2010	1	MYRRH ST (E)	ALAMEDA ST (S)	WILLOW AVE (S)	AAC	B	2	611	36	21,382	3/7/24	80	42	58	0	Overlay - AC Structural	7/14/20
330	8	ALAMEDA ST SB	MYRRH ST (E)	COMPTON BLVD (E)	AC	B	4	1,282	60	69,645	6/19/24	80	35	31	34	New Construction - Initial	1/1/80
450	21	ALONDRA BLVD WB	ATLANTIC AVE	END PCC	PCC	C	2	140	24	5,202	6/26/24	80	45	16	39	New Construction - Initial	1/1/80
2430	1	ROSECRANS AVE WB	WILLOWBROOK AVE (N)	ACACIA (N)	AC	B	2	630	31	22,078	6/19/24	80	39	46	15	New Construction - Initial	1/1/80
2740	5	TAMARIND AVE	CARSON PL (E)	ELM ST (E)	AC	C	2	995	40	30,641	6/4/24	80	87	0	13	New Construction - Initial	1/1/80
560	11	ATLANTIC AVE NB	ALONDRA BLVD	END PCC	PCC	A	2	87	30	2,544	6/26/24	80	100	0	0	New Construction - Initial	1/1/80
450	2	ALONDRA BLVD WB	LIME AVE (S)	ATLANTIC AVE (S)	PCC	C	4	350	50	12,932	6/26/24	80	54	0	46	New Construction - Initial	1/1/80
3070	4	WILMINGTON AVE SB	134TH ST	137TH ST	AC	A	2	1,214	33	43,500	6/24/24	82	86	14	0	Complete Reconstruction - AC	1/1/17
3070	6	WILMINGTON AVE SB	CRESSEY ST (W)	ROSECRANS AVE (W)	AC	A	2	758	33	24,257	6/24/24	82	92	8	0	Complete Reconstruction - AC	1/1/17
2010	6	MYRRH ST (E)	BULLIS RD (S)	BRADFIELD AVE (S)	AAC	B	2	891	40	29,628	4/18/24	82	8	92	0	Overlay - AC Structural	7/14/20
3060	16	WILMINGTON AVE NB	134TH ST (W)	131ST ST (W)	AC	A	2	1,027	28	35,099	6/24/24	83	62	0	38	Complete Reconstruction - AC	1/1/17
3030	3	WILLOWBROOK AVE (S) NB	TICHENOR ST (E)	ALONDRA BLVD (W)	AC	B	2	1,110	30	34,628	6/12/24	83	61	39	0	New Construction - Initial	1/1/80
320	11	ALAMEDA ST NB	PINE ST (E)	CARLIN AVE (E)	AC	B	2	1,320	48	55,898	6/17/24	83	83	0	17	New Construction - Initial	1/1/80
320	13	ALAMEDA ST NB	BANNING ST (E)	CITY LIMITS (N)	AC	B	2	1,570	46	71,726	6/24/24	83	69	25	6	New Construction - Initial	1/1/80
3070	2	WILMINGTON AVE SB	EL SEGUNDO BLVD (W)	131ST ST (W)	AC	A	2	1,073	28	34,951	6/24/24	83	94	0	6	Complete Reconstruction - AC	1/1/17
3060	15	WILMINGTON AVE NB	137TH ST (W)	134TH ST (W)	AC	A	2	1,214	28	41,475	6/24/24	83	100	0	0	Complete Reconstruction - AC	1/1/17
3070	5	WILMINGTON AVE SB	137TH ST	CRESSEY ST (W)	AC	A	2	799	33	27,560	6/24/24	83	84	16	0	Complete Reconstruction - AC	1/1/17
930	13	CENTRAL AVE NB	POPLAR ST (W)	ROSECRANS AVE (W)	AC	A	1	1,060	22	33,919	4/16/24	83	75	25	0	Complete Reconstruction - AC	5/1/16
1900	1	MATTHISEN AVE (N)	COMPTON BLVD (W)	SCHOOL ST (W)	AC	B	2	627	26	15,469	6/18/24	84	92	8	0	New Construction - Initial	1/1/80
1240	9	EL SEGUNDO BLVD (W)	BEGIN PCC	COMPTON AVE (N)	PCC	A	3	236	30	9,761	5/29/24	84	45	18	37	New Construction - Initial	1/1/80
550	11	ATLANTIC AVE SB	ALONDRA BLVD	END PCC (85' S/ ALONDRA BLVD)	PCC	A	2	85	32	2,222	6/25/24	84	66	0	34	New Construction - Initial	1/1/80
3130	1	CASTLEGATE AVE (S)	CITY LIMITS	MCMILLAN ST (E)	AC	B	2	130	36	3,060	6/26/24	84	93	0	7	New Construction - Initial	1/1/80
2510	2	SANTA FE AVE NB	ARTESIA BLVD (S)	TARTAR LN (S)	AC	A	2	1,310	57	48,946	3/7/24	84	73	27	0	New Construction - Initial	1/1/80
430	15	ALONDRA BLVD EB	PANNES AVE (S)	310' E of HARRIS AVE (S)	AC	C	2	1,443	33	49,602	3/8/24	84	48	52	0	New Construction - Initial	1/1/80
3060	17	WILMINGTON AVE NB	131ST ST (W)	EL SEGUNDO BLVD (W)	AC	A	2	1,073	32	38,048	6/24/24	84	57	27	16	Complete Reconstruction - AC	1/1/17
2140	8	PALMER ST (E)	ALAMEDA ST (N)	ALAMEDA ST (N) w/o RR	PCC	C	4	155	58	4,107	6/25/24	85	49	0	51	New Construction - Initial	1/1/80
3490	6	CENTRAL AVE SB	POPLAR ST (W)	COMPTON BLVD (W)	AC	A	2	1,518	30	49,033	4/16/24	85	78	8	14	Complete Reconstruction - AC	5/1/16
1900	2	MATTHISEN AVE (N)	SCHOOL ST (W)	ARBUTUS ST (W)	AC	B	2	584	26	14,776	6/18/24	85	85	15	0	New Construction - Initial	1/1/80

BranchID	Sec ID	Name	From	To	Surface Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
550	10	ATLANTIC AVE SB	BEGIN PCC (145' N/ ALONDRA BLVD)	ALONDRA BLVD	PCC	A	2	145	40	5,780	6/26/24	85	43	0	57	New Construction - Initial	1/1/80
3060	14	WILMINGTON AVE NB	CRESSEY ST (W)	137TH ST (W)	AC	A	2	799	32	26,362	6/24/24	85	100	0	0	Complete Reconstruction - AC	1/1/17
3070	3	WILMINGTON AVE SB	131ST ST (W)	134TH ST (W)	AC	A	2	1,027	41	33,814	6/24/24	85	73	0	27	Complete Reconstruction - AC	1/1/17
320	12	ALAMEDA ST NB	CARLIN AVE (E)	BANNING ST (E)	AC	B	2	1,325	46	60,576	6/24/24	85	70	30	0	New Construction - Initial	1/1/80
930	12	CENTRAL AVE NB	COMPTON BLVD (W)	POPLAR ST (W)	AC	A	1	1,518	28	49,908	4/16/24	86	99	1	0	Complete Reconstruction - AC	5/1/16
1810	9	MAGNOLIA ST (W)	OLEANDER AVE (S)	ACACIA AVE (S)	AC	C	2	697	32	17,755	2/29/24	86	66	0	34	New Construction - Initial	1/1/80
3490	5	CENTRAL AVE SB	ROSECRANS AVE (W)	POPLAR ST (W)	AC	A	1	1,060	21	38,008	4/16/24	87	100	0	0	Complete Reconstruction - AC	5/1/16
450	4	ALONDRA BLVD WB	CITY LIMITS (E)	PANNES AVE (S)	AC	C	2	1,443	36	53,760	3/8/24	87	45	55	0	New Construction - Initial	1/1/80
830	9	CALDWELL ST (W)	CENTER ST (S)	OLEANDER AVE (S)	AAC	B	2	1,372	36	39,652	6/12/24	89	24	71	5	Overlay - AC Structural	7/14/20
430	16	ALONDRA BLVD EB	CITY LIMITS (W)	315' W of ATLANTIC (S)	AC	C	2	279	28	8,169	6/25/24	89	76	24	0	New Construction - Initial	1/1/80
930	17	CENTRAL AVE NB	STOCKWELL ST (W)	CITY LIMITS (N)	AC	A	2	1,280	35	45,302	4/15/24	89	79	21	0	Complete Reconstruction - AC	5/1/16
830	8	CALDWELL ST (W)	WILMINGTON AVE (S)	CENTER ST (S)	AAC	B	2	1,297	36	37,724	6/12/24	90	60	40	0	Overlay - AC Structural	7/14/20
3490	3	CENTRAL AVE SB	PIRU ST (W)	200' N ROSECRANS AVE (W)	AC	A	2	1,876	35	68,338	4/15/24	90	95	0	5	Complete Reconstruction - AC	5/1/16
1050	6	COMPTON BLVD WB	LONG BEACH BLVD (N)	BURRIS AVE (N)	AAC	A	2	1,070	36	42,999	6/4/24	90	19	0	81	Overlay - AC Structural	12/18/17
3490	1	CENTRAL AVE SB	CITY LIMITS (N)	135TH ST (W)	AC	A	2	1,280	35	49,278	4/15/24	90	100	0	0	Complete Reconstruction - AC	5/1/16
3490	13	CENTRAL AVE SB	91 FWY BRIDGE	CITY LIMIT (S)	AC	A	2	1,335	32	50,337	6/11/24	90	76	0	24	New Construction - Initial	1/1/80
3490	2	CENTRAL AVE SB	135TH ST (W)	PIRU ST(W)	AC	A	2	210	35	8,615	4/15/24	91	95	0	5	Complete Reconstruction - AC	5/1/16
930	16	CENTRAL AVE NB	PIRU ST (W)	STOCKWELL ST (W)	AC	A	2	210	35	7,249	4/15/24	91	95	0	5	Complete Reconstruction - AC	5/1/16
540	8	ARTESIA BLVD WB	HARBOR AVE (S)	CITY LIMITS (E)	AC	A	2	505	36	40,554	6/25/24	91	85	15	0	Complete Reconstruction - AC	5/1/16
1040	10	COMPTON BLVD EB	ALAMEDA ST (S)	SANTA FE AVE (S)	AAC	A	2	1,265	36	48,133	6/4/24	91	35	34	31	Overlay - AC Structural	12/18/17
3640	1	HARBOR AVE	CITY LIMIT (N)	ARTESIA BLVD (E)	AC	C	2	241	60	7,882	6/25/24	91	52	0	48	New Construction - Initial	1/1/80
930	14	CENTRAL AVE NB	CITY LIMITS (S)	138TH ST (W)	AC	A	2	670	35	30,915	4/15/24	92	100	0	0	Complete Reconstruction - AC	5/1/16
3630	1	SUSANA RD (S)	ARTESIA BLVD (E)	CITY LIMIT (S)	AC	C	4	251	60	10,863	6/25/24	92	51	37	12	Complete Reconstruction - AC	1/1/17
930	15	CENTRAL AVE NB	138TH ST (W)	PIRU ST (W)	AC	A	2	775	35	29,930	4/15/24	92	100	0	0	Complete Reconstruction - AC	5/1/16
930	11	CENTRAL AVE NB	154TH ST (W)	COMPTON BLVD (W)	AC	A	2	1,135	32	38,335	4/16/24	92	51	49	0	Complete Reconstruction - AC	1/15/19
2140	4	PALMER ST (E)	LONG BEACH BLVD (N)	SLOAN AVE (N)	AC	C	4	758	54	40,043	6/4/24	92	100	0	0	New Construction - Initial	1/1/80
2140	6	PALMER ST (E)	PEARL AVE (N)	WILLOW AVE (N)	AC	C	4	975	58	49,753	6/4/24	92	100	0	0	New Construction - Initial	1/1/80
830	4	CALDWELL ST (W)	KEENE AVE (S)	HILLFORD AVE (S)	AAC	B	2	884	36	27,375	4/5/24	93	49	51	0	Overlay - AC Structural	7/14/20
1040	9	COMPTON BLVD EB	WILLOWBROOK AVE (S)	ALAMEDA ST (S)	AAC	A	2	1,255	32	31,863	5/30/24	93	24	69	7	Overlay - AC Structural	7/14/20
830	7	CALDWELL ST (W)	DWIGHT AVE (S)	WILMINGTON AVE (S)	AAC	B	2	1,190	36	39,522	4/5/24	93	68	32	0	Overlay - AC Structural	7/14/20
930	4	CENTRAL AVE NB	REEVE ST (W)	ALONDRA BLVD (W)	AC	A	2	675	34	22,063	4/16/24	93	58	42	0	Complete Reconstruction - AC	1/15/19
3490	10	CENTRAL AVE SB	ALONDRA BLVD (W)	REEVE ST (W)	AC	A	2	675	30	21,726	4/16/24	94	78	0	22	Complete Reconstruction - AC	1/15/19
2140	5	PALMER ST (E)	SLOAN AVE (N)	PEARL AVE (N)	AC	C	4	985	54	55,615	6/4/24	94	100	0	0	New Construction - Initial	1/1/80
2140	7	PALMER ST (E)	WILLOW AVE (N)	ALAMEDA ST (N)	AC	C	4	940	58	51,195	6/4/24	94	100	0	0	New Construction - Initial	1/1/80
1050	7	COMPTON BLVD WB	BURRIS AVE (N)	SANTE FE AVE (N)	AAC	A	2	1,290	38	51,086	6/4/24	94	38	0	62	Overlay - AC Structural	12/18/17
1040	11	COMPTON BLVD EB	SANTA FE AVE (S)	BURRIS AVE (S)	AAC	A	2	1,285	38	50,113	6/4/24	94	43	48	9	Overlay - AC Structural	12/18/17
830	6	CALDWELL ST (W)	NORTHWOOD AVE (S)	DWIGHT AVE (S)	AAC	B	2	1,032	36	36,004	4/5/24	94	100	0	0	Overlay - AC Structural	7/14/20
3490	9	CENTRAL AVE SB	156TH ST (W)	ALONDRA BLVD (W)	AC	A	2	1,105	30	35,547	4/16/24	94	55	45	0	Complete Reconstruction - AC	1/15/19
3490	11	CENTRAL AVE SB	REEVE ST (W)	CITY LIMIT (S)	AC	A	2	1,780	30	51,976	4/16/24	94	78	22	0	Complete Reconstruction - AC	1/15/19
930	3	CENTRAL AVE NB	CEMENTARY ENT.	REEVE ST (W)	AC	A	2	1,780	35	56,617	4/16/24	94	80	20	0	Complete Reconstruction - AC	1/15/19
930	5	CENTRAL AVE NB	ALONDRA BLVD (W)	156TH ST (W)	AC	A	2	1,105	30	37,349	4/16/24	94	80	20	0	Complete Reconstruction - AC	1/15/19
2010	5	MYRRH ST (E)	LONG BEACH BLVD (S)	BULLIS RD (S)	AC	B	2	434	40	13,127	4/18/24	95	77	0	23	New Construction - Initial	1/1/80
1050	9	COMPTON BLVD WB	ALAMEDA ST (N)	WILLOWBROOK AVE (N)	AAC	A	2	1,255	32	35,568	5/30/24	95	61	30	9	Overlay - AC Structural	7/14/20
930	10	CENTRAL AVE NB	156TH ST (W)	154TH ST (W)	AC	A	2	465	33	20,784	4/16/24	95	100	0	0	Complete Reconstruction - AC	1/15/19
830	5	CALDWELL ST (W)	HILLFORD AVE (S)	NORTHWOOD AVE (S)	AAC	B	2	1,165	36	42,523	4/5/24	95	100	0	0	Overlay - AC Structural	7/14/20
840	7	CALDWELL ST (E)	HARRIS AVE	ATLANTIC DR (S)	AC	B	2	1,570	33	53,061	6/18/24	95	100	0	0	Complete Reconstruction - AC	5/1/16
1040	12	COMPTON BLVD EB	BURRIS AVE (S)	LONG BEACH BLVD (S)	AAC	A	2	1,055	37	42,582	6/4/24	96	39	0	61	Overlay - AC Structural	12/18/17
830	1	CALDWELL ST (W)	END (W)	MCKINLEY AVE	AAC	B	2	1,195	36	40,679	4/5/24	96	100	0	0	Overlay - AC Structural	7/14/20
830	2	CALDWELL ST (W)	MCKINLEY AVE	WADSWORTH AVE (S)	AAC	B	2	1,308	36	44,164	4/5/24	96	100	0	0	Overlay - AC Structural	7/14/20
830	3	CALDWELL ST (W)	WADSWORTH AVE (S)	KEENE AVE (S)	AAC	B	2	1,149	36	37,750	4/5/24	96	100	0	0	Overlay - AC Structural	7/14/20
450	12	ALONDRA BLVD WB	CENTER AVE (S)	WILMINGTON AVE (S)	AC	C	2	1,290	42	46,708	3/8/24	96	72	28	0	New Construction - Initial	1/1/80
3490	7	CENTRAL AVE SB	COMPTON BLVD (W)	154TH ST (W)	AC	A	2	1,232	30	49,487	4/16/24	96	100	0	0	Complete Reconstruction - AC	1/15/19
3490	8	CENTRAL AVE SB	154TH ST (W)	156TH ST (W)	AC	A	2	463	30	17,010	4/16/24	96	100	0	0	Complete Reconstruction - AC	1/15/19
430	4	ALONDRA BLVD EB	CENTRAL AVE (S)	NORTHWOOD AVE (S)	AC	C	2	1,785	30	51,413	3/8/24	96	100	0	0	New Construction - Initial	1/1/80
430	5	ALONDRA BLVD EB	NORTHWOOD AVE (S)	DWIGHT AVE (S)	AC	C	2	925	30	27,563	3/8/24	96	100	0	0	New Construction - Initial	1/1/80
730	1	BRADFIELD AVE (N)	COMPTON BLVD (E)	SAN VINCENTE ST (E)	AAC	B	2	1,207	36	31,916	6/4/24	97	84	0	16	Overlay - AC Structural	7/14/20
1050	8	COMPTON BLVD WB	SANTE FE AVE (N)	ALAMEDA ST (N)	AAC	A	2	1,270	38	44,841	6/4/24	97	77	0	23	Overlay - AC Structural	12/18/17
450	11	ALONDRA BLVD WB	OLEANDER AVE (S)	CENTER AVE (S)	AC	C	2	1,365	46	45,724	3/8/24	97	100	0	0	New Construction - Initial	1/1/80
450	8	ALONDRA BLVD WB	SANTA FE AVE (S)	ALAMEDA ST (S)	AC	C	2	975	34	25,282	3/8/24	97	100	0	0	New Construction - Initial	1/1/80
450	10	ALONDRA BLVD WB	WILLOWBROOK AVE (S)	OLEANDER AVE (S)	AC	C	2	1,345	35	45,314	3/8/24	97	100	0	0	New Construction - Initial	1/1/80

BranchID	Sec ID	Name	From	To	Surface Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
430	3	ALONDRA BLVD EB	KENNE AVE (S)	CENTRAL AVE (S)	AC	C	2	545	33	19,491	3/8/24	97	60	40	0	New Construction - Initial	1/1/80
430	9	ALONDRA BLVD EB	OLEANDER AVE (S)	WILLOWBROOK AVE (S)	AC	C	2	1,340	36	43,277	3/8/24	97	60	40	0	New Construction - Initial	1/1/80
450	20	ALONDRA BLVD WB	I-710 SB ON RAMP	LIME ST (S)	AC	C	2	408	33	16,282	6/26/24	98	100	0	0	New Construction - Initial	1/1/80
450	5	ALONDRA BLVD WB	PANNES AVE (S)	LONG BEACH BLVD (S)	AC	C	2	1,475	36	49,584	3/8/24	98	65	35	0	New Construction - Initial	1/1/80
2010	7	MYRRH ST (E)	BRADFIELD AVE (S)	LOCUST AVE (S)	AAC	B	2	942	40	31,342	4/18/24	98	78	0	22	Overlay - AC Structural	7/14/20
2010	8	MYRRH ST (E)	LOCUST AVE (S)	CITY LIMITS (E)	AAC	B	2	831	40	26,244	4/18/24	98	85	0	15	Overlay - AC Structural	7/14/20
2010	4	MYRRH ST (E)	BURRIS AVE (S)	LONG BEACH BLVD (S)	AAC	B	2	1,081	36	33,048	3/7/24	98	82	0	18	Overlay - AC Structural	7/14/20
430	13	ALONDRA BLVD EB	MAYO AVE (S)	LONG BEACH BLVD (S)	AC	C	2	1,485	33	53,583	3/8/24	98	100	0	0	New Construction - Initial	1/1/80
430	12	ALONDRA BLVD EB	SANTA FE AVE (S)	MAYO AVE (S)	AC	C	2	1,150	33	38,883	3/8/24	98	100	0	0	New Construction - Initial	1/1/80
430	14	ALONDRA BLVD EB	LONG BEACH BLVD (S)	PANNES AVE (S)	AC	C	2	1,475	33	52,971	3/8/24	98	100	0	0	New Construction - Initial	1/1/80
430	6	ALONDRA BLVD EB	DWIGHT AVE (S)	WILMINGTON AVE (S)	AC	C	2	1,151	33	38,209	3/8/24	98	100	0	0	New Construction - Initial	1/1/80
450	15	ALONDRA BLVD WB	NORTHWOOD AVE (S)	CENTRAL AVE (S)	AC	C	2	1,765	32	63,646	3/8/24	98	100	0	0	New Construction - Initial	1/1/80
450	13	ALONDRA BLVD WB	WILMINGTON AVE (S)	DWIGHT AVE (S)	AC	C	2	1,150	32	42,857	3/8/24	98	100	0	0	New Construction - Initial	1/1/80
450	14	ALONDRA BLVD WB	DWIGHT AVE (S)	NORTHWOOD AVE (S)	AC	C	2	930	32	36,345	3/8/24	98	100	0	0	New Construction - Initial	1/1/80
2010	3	MYRRH ST (E)	CHESTER AVE (S)	BURRIS AVE (S)	AAC	B	2	996	36	24,084	3/7/24	98	82	0	18	Overlay - AC Structural	7/14/20
430	20	ALONDRA BLVD EB	I-710 OVERPASS	CITY LIMITS	AAC	C	2	135	36	7,210	6/26/24	98	100	0	0	Overlay - AC Structural	7/14/20
430	11	ALONDRA BLVD EB	ALAMEDA ST (S)	SANTA FE AVE (S)	AC	C	2	966	32	24,471	3/8/24	98	100	0	0	New Construction - Initial	1/1/80
430	2	ALONDRA BLVD EB	OYMAR AVE (S)	KEENE AVE (S)	AC	C	2	1,710	36	61,930	3/8/24	98	100	0	0	New Construction - Initial	1/1/80
430	8	ALONDRA BLVD EB	CENTER AVE (S)	OLEANDER AVE (S)	AC	C	2	1,368	40	47,741	3/8/24	98	100	0	0	New Construction - Initial	1/1/80
430	1	ALONDRA BLVD EB	CITY LIMITS (W)	OYMAR AVE (S)	AC	C	2	1,295	40	41,564	3/8/24	98	100	0	0	New Construction - Initial	1/1/80
430	10	ALONDRA BLVD EB	WILLOWBROOK AVE (S)	ALAMEDA ST (S)	AC	C	2	1,264	36	41,203	3/8/24	98	100	0	0	New Construction - Initial	1/1/80
430	7	ALONDRA BLVD EB	WILMINGTON AVE (S)	CENTER AVE (S)	AC	C	2	1,285	36	45,780	3/8/24	98	100	0	0	New Construction - Initial	1/1/80
450	18	ALONDRA BLVD WB	OYMAR AVE (S)	CITY LIMIT (W)	AC	C	2	1,290	38	42,006	3/8/24	98	100	0	0	New Construction - Initial	1/1/80
450	1	ALONDRA BLVD WB	CITY LIMITS (E)	I-710 OVERPASS	AC	C	2	135	36	5,586	6/26/24	98	100	0	0	New Construction - Initial	1/1/80
450	16	ALONDRA BLVD WB	CENTRAL AVE (S)	KEENE AVE (S)	AC	C	2	545	36	17,667	3/8/24	98	100	0	0	New Construction - Initial	1/1/80
450	6	ALONDRA BLVD WB	LONG BEACH BLVD (S)	MAYO AVE (S)	AC	C	2	1,485	34	51,683	3/8/24	98	100	0	0	New Construction - Initial	1/1/80
450	7	ALONDRA BLVD WB	MAYO AVE (S)	SANTA FE AVE (S)	AC	C	2	1,150	34	42,810	3/8/24	98	100	0	0	New Construction - Initial	1/1/80
450	3	ALONDRA BLVD WB	END PCC W/ ATLANTIC AVE	CITY LIMITS (W)	AC	C	2	639	35	18,824	3/8/24	98	100	0	0	New Construction - Initial	1/1/80
450	17	ALONDRA BLVD WB	KEENE AVE (S)	OYMAR AVE (S)	AC	C	2	1,710	38	63,357	3/8/24	98	100	0	0	New Construction - Initial	1/1/80
2500	6	SANTA FE AVE SB	COMPTON BLVD (E)	MYRRH ST (E)	AAC	A	2	1,390	39	47,839	3/7/24	99	100	0	0	Overlay - AC Structural	10/16/10
2500	3	SANTA FE AVE SB	TUCKER ST (E)	ROSECRANS AVE (E)	AAC	A	2	1,350	42	46,939	3/7/24	99	100	0	0	Overlay - AC Structural	10/16/10
2500	7	SANTA FE AVE SB	MYRRH ST (E)	ALONDRA BLVD (E)	AAC	A	2	1,380	32	45,704	3/7/24	99	100	0	0	Overlay - AC Structural	10/16/10
2500	2	SANTA FE AVE SB	OAKS ST (E)	TUCKER ST (E)	AAC	A	2	1,050	40	36,466	3/7/24	99	100	0	0	Overlay - AC Structural	10/16/10
2500	4	SANTA FE AVE SB	ROSECRANS AVE (E)	ELM ST (E)	AAC	A	2	954	33	30,843	3/7/24	99	100	0	0	Overlay - AC Structural	10/16/10
2500	1	SANTA FE AVE SB	CITY LIMITS (N)	OAKS ST (E)	AAC	A	2	1,040	34	35,421	3/7/24	99	100	0	0	Overlay - AC Structural	10/16/10
2510	11	SANTA FE AVE NB	TUCKER ST (E)	OAKS ST (E)	AAC	A	2	1,050	36	35,951	3/7/24	99	100	0	0	Overlay - AC Structural	10/16/10
2510	12	SANTA FE AVE NB	OAKS ST (E)	CITY LIMITS (N)	AAC	A	2	1,040	36	35,173	3/7/24	99	100	0	0	Overlay - AC Structural	10/16/10
2510	6	SANTA FE AVE NB	ALONDRA BLVD (E)	MYRRH ST (E)	AAC	A	2	1,380	27	44,480	3/7/24	99	100	0	0	Overlay - AC Structural	10/16/10
2510	7	SANTA FE AVE NB	MYRRH ST (E)	COMPTON BLVD (E)	AAC	A	2	1,390	40	48,902	3/7/24	99	100	0	0	Overlay - AC Structural	10/16/10
2510	9	SANTA FE AVE NB	ELM ST (E)	ROSECRANS AVE (E)	AAC	A	2	980	36	32,878	3/7/24	99	100	0	0	Overlay - AC Structural	10/16/10
2510	8	SANTA FE AVE NB	COMPTON BLVD (E)	ELM ST (E)	AAC	A	2	1,760	40	58,840	3/7/24	99	100	0	0	Overlay - AC Structural	10/16/10
2510	10	SANTA FE AVE NB	ROSECRANS AVE (E)	TUCKER ST (E)	AAC	A	2	1,350	31	46,038	3/7/24	99	100	0	0	Overlay - AC Structural	10/16/10
2500	10	SANTA FE AVE SB	GREENLEAF BLVD (E)	TARTAR LN	AC	A	2	1,220	36	46,671	3/7/24	99	100	0	0	New Construction - Initial	1/1/80
2500	9	SANTA FE AVE SB	CALDWELL ST (E)	GREENLEAF BLVD (E)	AC	A	2	1,360	42	52,306	3/7/24	99	100	0	0	New Construction - Initial	1/1/80
2500	8	SANTA FE AVE SB	ALONDRA BLVD (E)	CALDWELL ST (E)	AC	A	2	1,360	31	48,867	3/7/24	99	100	0	0	New Construction - Initial	1/1/80
2510	5	SANTA FE AVE NB	CALDWELL ST (E)	ALONDRA BLVD (E)	AC	A	2	1,350	38	51,964	3/7/24	99	100	0	0	New Construction - Initial	1/1/80
2510	3	SANTA FE AVE NB	TARTAR LN (S)	GREENLEAF BLVD (S)	AC	A	2	1,280	37	49,371	3/7/24	99	100	0	0	New Construction - Initial	1/1/80
2510	4	SANTA FE AVE NB	GREENLEAF BLVD (E)	CALDWELL ST (E)	AC	A	2	1,360	40	50,826	3/7/24	99	100	0	0	New Construction - Initial	1/1/80
2410	12	ROSECRANS AVE EB	LONG BEACH BLVD	BULLIS RD (N)	AC	B	2	385	28	10,729	2/29/24	100	0	0	0	New Construction - Initial	1/1/80
2410	13	ROSECRANS AVE EB	BULLIS RD (N)	BRADFIELD AVE (N)	AC	B	2	830	28	25,497	2/29/24	100	0	0	0	New Construction - Initial	1/1/80
2410	15	ROSECRANS AVE EB	THORSON AVE (N)	CITY LIMIT (E)	AC	B	2	690	30	16,302	6/26/24	100	0	0	0	New Construction - Initial	1/1/80
2410	11	ROSECRANS AVE EB	MAYO AVE (N)	LONG BEACH BLVD	AC	B	2	1,355	28	42,005	2/29/24	100	0	0	0	New Construction - Initial	1/1/80
2410	9	ROSECRANS AVE EB	WILLOWBROOK AVE (N)	WILLOW AVE	AC	B	2	672	28	19,235	6/10/24	100	0	0	0	New Construction - Initial	1/1/80
2410	16	ROSECRANS AVE EB	WEST CITY LIMIT (E/ COOKACRE ST)	EAST CITY LIMIT (W/ ATLANTIC)	AC	B	2	230	36	8,665	6/26/24	100	0	0	0	New Construction - Initial	1/1/80
2410	10	ROSECRANS AVE EB	WILLOW AVE (N)	MAYO AVE (N)	AC	B	2	1,338	28	36,898	6/28/24	100	0	0	0	New Construction - Initial	1/1/80
2410	14	ROSECRANS AVE EB	BRADFIELD AVE (N)	HARRIS AVE	AC	B	2	1,524	28	45,835	2/29/24	100	0	0	0	New Construction - Initial	1/1/80
2430	15	ROSECRANS AVE WB	LONG BEACH BLVD	MAYO AVE (N)	AC	B	2	1,346	28	39,880	2/29/24	100	0	0	0	New Construction - Initial	1/1/80
2430	14	ROSECRANS AVE WB	BULLIS RD (N)	LONG BEACH BLVD	AC	B	2	384	28	11,759	2/29/24	100	0	0	0	New Construction - Initial	1/1/80
2430	12	ROSECRANS AVE WB	HARRIS AVE	BRADFIELD AVE (N)	AC	B	2	1,523	28	45,861	2/29/24	100	0	0	0	New Construction - Initial	1/1/80
2430	10	ROSECRANS AVE WB	EAST CITY LIMIT (W/ ATLANTIC AVE)	WEST CITY LIMIT (E/ COOKACRE ST)	AC	B	2	1,338	28	7,716	6/26/24	100	0	0	0	New Construction - Initial	1/1/80

BranchID	Sec ID	Name	From	To	Surface Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
2430	16	ROSECRANS AVE WB	MAYO AVE (N)	SANTA FE AVE	AC	B	2	950	28	27,833	2/29/24	100	0	0	0	New Construction - Initial	1/1/80
2430	17	ROSECRANS AVE WB	SANTA FE AVE	ALAMEDA ST OVERPASS	AC	B	2	981	28	27,011	6/10/24	100	0	0	0	New Construction - Initial	1/1/80
2430	13	ROSECRANS AVE WB	BRADFIELD AVE (N)	BULLIS RD (N)	AC	B	2	831	28	26,153	2/29/24	100	0	0	0	New Construction - Initial	1/1/80
2430	11	ROSECRANS AVE WB	CITY LIMITS (E/ BUTLER)	HARRIS AVE	AC	B	2	465	28	14,549	6/26/24	100	0	0	0	New Construction - Initial	1/1/80
730	4	BRADFIELD AVE (N)	EZMIRLIAM ST (E)	DIANE DR (E)	AAC	C	2	1,164	36	40,565	4/17/24	100	0	0	0	Overlay - AC Structural	6/13/23
730	3	BRADFIELD AVE (N)	ROSECRANS AVE (E)	EZMIRLIAM ST (E)	AAC	C	2	949	36	33,085	4/17/24	100	0	0	0	Overlay - AC Structural	6/13/23
730	5	BRADFIELD AVE (N)	DIANE DR (E)	CITY LIMITS	AAC	C	2	1,031	36	36,427	4/17/24	100	0	0	0	Overlay - AC Structural	6/13/23
								81.5		**14,932,179**							
		Locals															
2250	1	PETROLIA AVE	ALONDRA BLVD (E)	CALDWELL ST (E)	AC	E	2	1,335	33	40,558	6/10/24	1	34	48	18	New Construction - Initial	1/1/80
1940	9	MCMILLAN ST	CITY LIMITS (E)	GIBSON AVE (S)	AC	E	1	788	17	16,622	4/17/24	5	18	82	0	New Construction - Initial	1/1/80
300	1	ACACIA AVE	APRA ST (W)	MANVILLE ST (W)	AC	I	2	775	40	34,584	6/11/24	6	34	60	6	New Construction - Initial	1/1/80
1940	10	MCMILLAN ST	GIBSON AVE (S)	CITY LIMITS (W)	AC	E	1	193	17	3,180	4/17/24	6	9	85	6	New Construction - Initial	1/1/80
2660	1	STANFORD AVE	CITY LIMITS (S)	CITY LIMITS (N)	AC	I	2	1,150	36	38,498	4/15/24	6	25	65	10	New Construction - Initial	1/1/80
1940	7	MCMILLAN ST	LIME AVE (S)	GIBSON AVE (S)	AC	E	1	836	17	15,884	4/17/24	6	10	89	1	New Construction - Initial	1/1/80
40	4	130TH ST (W)	WILLMINGTON AVE (N)	CITY LIMITS	AC	E	2	225	26	5,694	6/24/24	7	39	46	15	New Construction - Initial	1/1/80
2490	5	SAN VINCENTE ST	ATLANTIC AVE (S)	CITY LIMITS e/o ATLANTIC	AC	E	2	120	39	4,583	6/26/24	8	10	82	8	New Construction - Initial	1/1/80
1760	1	LOCUST AVE (N)	ORCHARD ST (E)	PINE ST DR	AC	E	2	1,023	32	27,959	4/17/24	8	17	83	0	New Construction - Initial	1/1/80
640	1	BANNING ST	SOUTH PACIFIC RR	CITY LIMITS	AC	E	2	1,637	36	55,937	6/24/24	8	34	50	16	New Construction - Initial	1/1/80
80	1	134TH PL (W)	SLATER AVE (N)	GRANDEE AVE (N)	AC	E	2	908	36	23,162	5/29/24	8	19	81	0	New Construction - Initial	1/1/80
110	6	136TH ST (W)	PARMELEE AVE (N)	ELVA AVE (N)	AC	E	2	1,311	36	36,421	4/15/24	8	3	90	7	New Construction - Initial	1/1/80
1510	2	HARLAN AVE (S)	166TH ST (W)	BENNETT ST (W)	AC	E	2	443	36	14,223	4/12/24	8	41	57	2	New Construction - Initial	1/1/80
2180	1	PATTIE ST	LONG BEACH BLVD (N)	BULLIS RD (N)	AC	E	2	422	26	7,523	6/17/24	8	26	65	9	New Construction - Initial	1/1/80
120	1	137TH ST (W)	CENTRAL AVE (N)	PARMELEE AVE (N)	AC	E	2	1,087	36	34,923	4/15/24	9	6	92	2	New Construction - Initial	1/1/80
2520	3	SAUNDERS ST	THORSON AVE (N)	CITY LIMITS (E)	AC	E	2	305	42	10,727	6/4/24	9	23	64	13	New Construction - Initial	1/1/80
120	3	137TH ST (W)	TAJAUTA AVE (N)	ELVA AVE (N)	AC	E	2	355	36	9,216	4/15/24	9	3	89	8	New Construction - Initial	1/1/80
1610	3	JOHNSON ST (E)	ALAMEDA ST (S)	SANTA FE AVE (S)	AC	E	2	663	36	24,405	6/10/24	9	35	61	4	New Construction - Initial	1/1/80
2600	4	SLATER AVE	EL SEGUNDO BLVD (W)	CITY LIMITS (N)	AC	E	2	326	33	12,148	5/28/24	9	25	58	17	New Construction - Initial	1/1/80
940	4	CENTRAL AVE FRONTAGE	CITY LIMIT (S)	PIRU ST (W)	AC	E	2	921	27	23,004	4/15/24	9	10	86	4	New Construction - Initial	1/1/80
2270	3	PIRU ST	PARMELEE AVE (N)	ELVA AVE (N)	AC	E	2	1,101	28	29,850	4/15/24	9	21	73	6	New Construction - Initial	1/1/80
2460	1	SAN LUIS ST	END (W)	BRADFIELD AVE (N)	AC	E	2	458	34	13,754	6/4/24	9	26	66	8	New Construction - Initial	1/1/80
1200	1	DIXON ST (E)	ALAMEDA ST (N)	ESTER ST (N)	AC	E	2	965	36	21,533	6/24/24	9	23	66	11	New Construction - Initial	1/1/80
160	1	149TH ST (E)	CITY LIMITS	CENTRAL AVE (N)	AC	E	2	155	36	4,252	4/16/24	9	3	96	1	New Construction - Initial	1/1/80
720	5	BOWEN AVE (N)	CYPRESS ST (E)	ALONDRA BLVD (E)	AC	E	2	708	32	22,372	4/18/24	9	18	82	0	New Construction - Initial	1/1/80
1260	7	ELM ST (E)	LONG BEACH BLVD (N)	BULLIS RD (N)	AC	E	2	421	30	10,151	6/17/24	9	30	42	28	New Construction - Initial	1/1/80
2540	1	SCHOOL ST	NESTOR AVE (N)	TAJAUTA AVE (N)	AC	E	2	692	29	18,178	6/5/24	9	10	84	6	New Construction - Initial	1/1/80
280	1	165TH ST (W)	HILLFORD AVE (S)	NORTHWOOD AVE (S)	AC	E	2	1,131	36	33,974	4/12/24	10	35	65	0	New Construction - Initial	1/1/80
940	3	CENTRAL AVE FRONTAGE	132ND ST (W)	CITY LIMITS (N)	AC	E	2	134	28	2,708	5/28/24	10	9	81	10	New Construction - Initial	1/1/80
110	7	136TH ST (W)	CENTRAL AVE (N)	PARMELEE AVE (N)	AC	E	2	1,096	36	31,330	4/15/24	10	3	94	3	New Construction - Initial	1/1/80
1330	1	EZMIRLIAN ST (E)	LONG BEACH BLVD (N)	BULLIS RD (N)	AC	E	2	416	35	12,974	4/17/24	10	15	81	4	New Construction - Initial	1/1/80
2460	2	SAN LUIS ST	BRADFIELD AVE (N)	END (E)	AC	E	2	505	30	13,687	6/4/24	10	19	73	8	New Construction - Initial	1/1/80
2650	11	SPRUCE ST	WILLOWBROOK AVE (N)	ALAMEDA ST (N)	PCC	E	2	830	29	23,839	6/4/24	10	10	57	33	New Construction - Initial	1/1/80
130	1	138TH ST (W)	CENTRAL AVE (N)	PARMELEE AVE (N)	AC	E	2	1,027	36	29,451	4/15/24	10	7	83	10	New Construction - Initial	1/1/80
140	1	139TH ST (W)	KEMP AVE (N)	WILMINGTON AVE (N)	AC	E	2	176	36	3,858	6/18/24	10	26	74	0	New Construction - Initial	1/1/80
2150	6	PALMER ST (W)	KEMP AVE (N)	END	AC	E	2	458	27	11,958	6/11/24	10	12	78	10	New Construction - Initial	1/1/80
2690	2	STOCKWELL ST	GRANDEE AVE (N)	HOLMES AVE (N)	AC	E	2	560	55	30,255	5/29/24	10	16	73	11	New Construction - Initial	1/1/80
2960	1	WEBER ST	ALAMEDA ST (N)	CITY LIMITS (E)	AC	I	2	1,780	46	56,167	6/24/24	11	35	58	7	New Construction - Initial	1/1/80
2690	1	STOCKWELL ST	SLATER AVE (N)	GRANDEE AVE (N)	AC	E	2	685	55	33,847	5/29/24	11	25	71	4	New Construction - Initial	1/1/80
130	2	138TH ST (W)	PARMELEE AVE (N)	TAJAUTA AVE (N)	AC	E	2	1,216	36	33,507	4/15/24	11	8	82	10	New Construction - Initial	1/1/80
2150	1	PALMER ST (W)	HILLFORD AVE (N)	NESTOR AVE (N)	AC	E	2	720	27	19,164	6/5/24	11	23	77	0	New Construction - Initial	1/1/80
2690	3	STOCKWELL ST	HOLMES AVE (N)	WILMINGTON AVE (N)	AC	E	2	560	32	21,849	5/29/24	11	12	79	9	New Construction - Initial	1/1/80
130	3	138TH ST (W)	TAJAUTA AVE (N)	ELVA AVE (N)	AC	E	2	530	36	15,705	4/15/24	11	6	70	24	New Construction - Initial	1/1/80
2050	3	OAKS ST	SANTA FE AVE (N)	ALHAMBRA AVE (N)	AC	E	2	634	36	20,077	6/19/24	11	31	68	1	New Construction - Initial	1/1/80
2900	1	WALNUT PARK WY	END (W)	END (E)	AC	I	2	720	38	42,020	6/11/24	11	19	78	3	New Construction - Initial	1/1/80
2270	1	PIRU ST	CENTRAL AVE	PARMELEE AVE (N)	AC	E	2	1,105	37	40,379	4/15/24	11	11	88	1	New Construction - Initial	1/1/80
770	2	BROADACRES AVE (N)	ARBUTUS ST (W)	MAGNOLIA ST (W)	AC	E	2	1,017	36	33,746	6/11/24	11	18	82	0	New Construction - Initial	1/1/80
3440	1	PEACH ST	PINE ST (E)	CITY LIMITS	AC	O	2	322	26	4,502	6/25/24	12	40	58	2	New Construction - Initial	1/1/80
1110	2	CRESSEY ST (W)	END (W)	KEMP AVE (N)	AC	E	2	507	36	12,639	5/29/24	12	10	86	4	New Construction - Initial	1/1/80
2890	1	WALNUT PARK DR	WALNUT ST (W)	WALNUT PKWY (W)	AC	I	2	570	42	24,549	6/11/24	12	19	76	5	New Construction - Initial	1/1/80
2720	10	TAJAUTA AVE	CITY LIMITS (S)	137TH ST (W)	AC	E	2	370	37	11,916	4/15/24	13	14	80	6	New Construction - Initial	1/1/80

BranchID	Sec ID	Name	From	To	Surface Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
3230	1	HOLLY AVE (S)	COMPTON BLVD (E)	MYRRH ST (E)	AC	E	2	1,345	36	34,513	4/18/24	13	16	81	3	New Construction - Initial	1/1/80
1310	1	EVERS AVE (N)	POPLAR ST (W)	SPRUCE ST (W)	AC	E	2	963	30	26,028	5/30/24	13	4	95	1	New Construction - Initial	1/1/80
40	1	130TH ST (W)	SLATER AVE (N)	COMPTON AVE (N)	AC	E	2	570	36	18,953	5/29/24	13	13	87	0	New Construction - Initial	1/1/80
2650	2	SPRUCE ST	EVERS AVE (N)	TAJAUTA AVE (N)	AC	E	2	245	29	6,726	5/30/24	13	13	85	2	New Construction - Initial	1/1/80
2840	3	VICTORIA ST (W)	DOMINGUEZ HILLS DR (S)	CITY LIMITS (E)	AC	E	4	880	35	51,857	6/11/24	13	23	72	5	New Construction - Initial	1/1/80
1230	1	EL SEGUNDO AVE	ALAMEDA ST (N)	CITY LIMITS (E)	AC	I	2	1,773	40	58,424	6/24/24	13	40	49	11	New Construction - Initial	1/1/80
3110	2	BROADACRES AVE (S)	CALDWELL ST (W)	END	AC	E	2	382	36	10,182	4/12/24	13	3	95	2	New Construction - Initial	1/1/80
680	5	BENNETT ST (E)	APRILLA AVE (S)	END (E)	AC	E	2	380	28	11,814	4/16/24	14	3	84	13	New Construction - Initial	1/1/80
3320	1	MAPLE ST (E)	WILLOWBROOK AVE (N)	TAMARIND AVE (N)	PCC	E	2	542	26	14,228	6/4/24	14	11	81	8	New Construction - Initial	1/1/80
3570	1	HILLFORD AVE (S)	166TH ST (W)	CALDWELL ST (W)	AC	E	2	486	40	17,647	4/12/24	14	11	89	0	New Construction - Initial	1/1/80
60	3	132ND ST (W)	SLATER AVE (N)	COMPTON AVE (N)	AC	E	2	461	36	14,897	5/29/24	14	7	85	8	New Construction - Initial	1/1/80
2160	1	PANNES AVE (N)	PIXLEY ST (E)	SAUNDERS ST (E)	AC	E	2	374	28	9,427	6/4/24	14	39	49	12	New Construction - Initial	1/1/80
3430	3	PEARL AVE (S)	ALONDRA BLVD (E)	CALDWELL ST (E)	AC	E	2	1,336	30	34,597	6/3/24	14	23	70	7	New Construction - Initial	1/1/80
950	1	CHERRY ST (W)	END (W)	KEMP AVE (N)	AC	E	2	433	36	11,069	5/29/24	14	8	80	12	New Construction - Initial	1/1/80
2260	3	PINE ST	SANTA FE AVE (N)	ALHAMBRA AVE (N)	AC	E	2	790	33	26,787	6/19/24	14	45	55	0	New Construction - Initial	1/1/80
1430	1	GRAHAM AVE (N)	STOCKWELL ST (W)	137TH ST (W)	AC	E	2	671	36	17,636	5/28/24	15	16	74	10	New Construction - Initial	1/1/80
2110	2	PACIFIC AVE (W)	CEDAR ST (W)	SPRUCE ST (W)	AC	E	2	531	28	14,734	5/30/24	15	45	47	8	New Construction - Initial	1/1/80
680	2	BENNETT ST (E)	CHESTER AVE (S)	BURRIS AVE (S)	AC	E	2	1,149	36	30,850	6/3/24	15	22	68	10	New Construction - Initial	1/1/80
1760	2	LOCUST AVE (N)	ROSECRANS AVE (E)	PIXLEY ST (E)	AC	E	2	686	32	17,706	6/4/24	15	25	71	4	New Construction - Initial	1/1/80
3200	2	ELM ST (W)	WILMINGTON AVE (N)	END	AC	E	2	573	25	13,955	6/11/24	15	21	68	11	New Construction - Initial	1/1/80
770	1	BROADACRES AVE (N)	SPRUCE ST (W)	POPLAR ST (W)	AC	E	2	986	36	25,393	5/30/24	15	17	80	3	New Construction - Initial	1/1/80
3320	2	MAPLE ST (E)	TAMARIND AVE (N)	ALAMEDA ST (N)	PCC	E	2	352	26	8,585	6/4/24	15	23	57	20	New Construction - Initial	1/1/80
2150	5	PALMER ST (W)	DWIGHT AVE (N)	KEMP AVE (N)	AC	E	2	670	27	16,746	6/11/24	15	5	77	18	New Construction - Initial	1/1/80
1760	3	LOCUST AVE (N)	PIXLEY ST (E)	END (S)	AC	E	2	667	32	18,251	6/4/24	15	15	73	12	New Construction - Initial	1/1/80
2800	3	THORSON AVE	ALONDRA BLVD (E)	MYRRH ST (E)	AC	E	2	1,310	29	35,941	4/18/24	15	24	76	0	New Construction - Initial	1/1/80
1630	2	KALSMAN AVE (N)	POPLAR ST (W)	SPRUCE ST (W)	AC	E	2	961	36	25,072	6/3/24	15	7	93	0	New Construction - Initial	1/1/80
3380	1	NORTHWOOD AVE (N)	POPLAR ST (W)	SPRUCE ST (W)	AC	E	2	983	27	25,041	5/30/24	15	29	71	0	New Construction - Initial	1/1/80
3430	1	PEARL AVE (S)	COMPTON BLVD (E)	MYRRH ST (E)	AC	E	2	1,347	27	35,221	6/3/24	15	29	66	5	New Construction - Initial	1/1/80
1590	1	HOLMES AVE (N)	STOCKWELL ST (W)	136TH ST (W)	AC	E	2	374	36	9,800	5/28/24	15	27	61	12	New Construction - Initial	1/1/80
290	1	166TH ST (W)	HILLFORD AVE (S)	NORTHWOOD AVE (S)	AC	E	2	1,131	36	35,051	4/12/24	15	10	82	8	New Construction - Initial	1/1/80
90	2	134TH ST (W)	CENTRAL AVE (N)	PARMELLE AVE (N)	AC	E	2	1,176	36	41,652	4/15/24	15	25	70	5	New Construction - Initial	1/1/80
2540	4	SCHOOL ST	KEMP AVE (N)	WILMINGTON AVE (N)	AC	E	2	645	28	15,661	6/11/24	16	6	73	21	New Construction - Initial	1/1/80
2600	3	SLATER AVE	132ND ST (W)	END (N)	AC	E	2	870	42	30,786	5/29/24	16	20	78	2	New Construction - Initial	1/1/80
120	2	137TH ST (W)	PARMELEE AVE (N)	TAJAUTA AVE (N)	AC	E	2	1,156	36	33,415	4/15/24	16	7	90	3	New Construction - Initial	1/1/80
2150	4	PALMER ST (W)	BROADACRES AVE (N)	DWIGHT AVE (N)	AC	E	2	368	27	8,434	6/11/24	16	5	83	12	New Construction - Initial	1/1/80
940	2	CENTRAL AVE FRONTAGE	134TH ST (W)	132ND ST (W)	AC	E	2	628	28	16,745	5/28/24	16	13	75	12	New Construction - Initial	1/1/80
1940	8	MCMILLAN ST	GIBSON AVE (S)	CITY LIMITS (E)	AC	E	1	957	17	18,441	4/17/24	16	21	79	0	New Construction - Initial	1/1/80
2640	2	SPRING AVE	PALMER ST (E)	ELM ST (E)	AC	E	2	890	24	18,489	6/25/24	16	31	45	24	New Construction - Initial	1/1/80
710	1	BLISS ST (W)	PAULSEN AVE (N)	END	AC	E	2	89	36	1,913	6/18/24	16	3	97	0	Slurry Seal	1/1/15
910	1	CEDAR ST (W)	END (W)	WILMINGTON AVE (N)	AC	E	2	1,145	36	24,269	5/30/24	16	16	84	0	New Construction - Initial	1/1/80
1630	1	KALSMAN AVE (N)	134TH ST (W)	133RD ST (W)	AC	E	2	573	36	18,090	4/15/24	16	14	81	5	New Construction - Initial	1/1/80
2610	7	SLOAN AVE	ELM ST (E)	ROSECRANS AVE (E)	AC	E	2	965	27	24,625	6/26/24	16	48	39	13	New Construction - Initial	1/1/80
130	4	138TH ST (W)	GRANDEE AVE (N)	KEMP AVE (N)	AC	E	2	1,206	36	48,420	5/28/24	16	10	85	5	New Construction - Initial	1/1/80
720	4	BOWEN AVE (N)	END (N)	CYPRESS ST (E)	AC	E	2	276	32	7,938	4/18/24	17	20	80	0	New Construction - Initial	1/1/80
270	1	163RD ST (W)	HILLFORD AVE (S)	NORTHWOOD AVE (S)	AC	E	2	1,195	36	44,558	4/12/24	17	5	95	0	New Construction - Initial	1/1/80
3660	1	72ND ST (E)	CITY LIMIT (E)	END (W)	AC	O	2	126	14	3,649	6/26/24	17	66	34	0	New Construction - Initial	1/1/80
3550	1	GOLETA ST	COMPTON BLVD (W)	CITY LIMITS (N)	AC	E	2	172	26	4,282	6/17/24	17	33	63	4	New Construction - Initial	1/1/80
370	2	ALHAMBRA AVE	ARLINGTON ST (E)	END (N)	AC	E	2	911	14	12,507	6/19/24	17	34	54	12	New Construction - Initial	1/1/80
1740	2	LIME ST (S)	CITY LIMITS	MCMILLAN ST (E)	AC	E	2	87	32	2,947	6/26/24	17	25	56	19	New Construction - Initial	1/1/80
760	1	BRAZIL ST (W)	CENTRAL AVE (N)	ALBERTSON AVE (N)	AC	E	2	805	36	20,399	6/5/24	18	17	83	0	New Construction - Initial	1/1/80
820	3	BUTLER AVE (S)	ROSECRANS AVE (E)	CITY LIMITS	AC	E	2	146	36	3,844	6/26/24	18	31	69	0	New Construction - Initial	1/1/80
300	3	ACACIA AVE	WALNUT ST (W)	RR TRACKS	AC	I	2	710	44	26,201	6/10/24	18	21	79	0	New Construction - Initial	1/1/80
3430	4	PEARL AVE (S)	CALDWELL ST (E)	GREENLEAF BLVD (E)	AC	E	2	1,337	30	34,765	6/3/24	18	19	73	8	New Construction - Initial	1/1/80
680	3	BENNETT ST (E)	BURRIS AVE (S)	CITY LIMITS	AC	E	2	1,629	36	42,941	6/3/24	18	23	62	15	Complete Reconstruction - AC	1/1/17
2650	6	SPRUCE ST	KEMP AVE (N)	END (W)	AC	E	2	215	29	5,970	6/11/24	18	36	64	0	New Construction - Initial	1/1/80
3260	3	KEENE AVE (S)	156TH ST (W)	154TH ST (W)	AC	E	2	431	36	12,463	4/16/24	18	4	87	9	New Construction - Initial	1/1/80
3270	3	KEMP AVE (N)	SPRUCE ST (W)	END (S)	AC	E	2	530	36	16,811	6/11/24	18	46	48	6	New Construction - Initial	1/1/80
2260	6	PINE ST	BULLIS RD (N)	BRADFIELD AVE (N)	AC	E	2	1,008	33	32,666	4/17/24	19	31	69	0	New Construction - Initial	1/1/80
1910	2	MAYO AVE (S)	BENNETT ST (E)	CALDWELL ST (E)	AC	E	2	560	25	14,846	6/24/24	19	36	51	13	New Construction - Initial	1/1/80
120	4	137TH ST (W)	END	GRANDEE AVE (N)	AC	E	2	317	36	10,565	5/28/24	19	14	86	0	New Construction - Initial	1/1/80

BranchID	Sec ID	Name	From	To	Surface Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1440	2	GRANDEE AVE	CALDWELL ST (W)	END (N)	AC	E	2	250	34	9,205	4/12/24	19	15	84	1	New Construction - Initial	1/1/80
1570	3	HILLFORD AVE (N)	BRAZIL ST (W)	PALMER ST (W)	AC	E	2	270	36	8,156	6/5/24	19	10	90	0	New Construction - Initial	1/1/80
680	6	BENNETT ST (E)	HARLAN AVE (S)	NORTHWOOD AVE (S)	AC	E	2	255	32	9,032	4/12/24	19	12	79	9	New Construction - Initial	1/1/80
3570	2	HILLFORD AVE (S)	CALDWELL ST (W)	163RD ST (W)	AC	E	2	313	40	12,109	4/12/24	19	6	91	3	New Construction - Initial	1/1/80
2140	3	PALMER ST (E)	BULLIS RD	LONG BEACH BLVD (N)	PCC	I	2	420	30	10,942	6/4/24	19	8	76	16	New Construction - Initial	1/1/80
2110	1	PACIFIC AVE (W)	KEMP AVE (N)	CEDAR ST (W)	AC	E	2	426	28	11,755	5/30/24	19	29	60	11	New Construction - Initial	1/1/80
680	7	BENNETT ST (E)	NORTHWOOD AVE (S)	GRANDE AVE (S)	AC	E	2	705	32	23,921	4/12/24	19	4	92	4	New Construction - Initial	1/1/80
2650	1	SPRUCE ST	ALBERTSON AVE (N)	KALSMEN AVE (N)	AC	E	2	510	29	15,817	6/3/24	19	9	86	5	New Construction - Initial	1/1/80
900	3	CASWELL AVE (S)	ALONDRA BLVD (W)	CLAUDE ST (W)	AC	E	2	841	36	23,389	4/5/24	19	11	74	15	New Construction - Initial	1/1/80
3270	2	KEMP AVE (N)	CRESSEY ST (W)	SPRUCE ST (W)	AAC	E	2	778	36	21,977	5/29/24	19	24	70	6	Overlay - AC Structural	1/18/11
2740	6	TAMARIND AVE	ELM ST (E)	ROSECRANS AVE (E)	PCC	E	2	970	32	28,706	6/4/24	19	16	70	14	New Construction - Initial	1/1/80
760	6	BRAZIL ST (W)	END	WILMINGTON AVE (N)	AC	E	2	198	36	4,783	6/11/24	19	13	64	23	New Construction - Initial	1/1/80
990	4	CLIVEDEN AVE (S)	POPLAR ST (W)	SPRUCE ST (W)	AC	E	2	988	32	25,301	5/30/24	19	12	85	3	New Construction - Initial	1/1/80
1880	2	MAPLE ST (W)	END (W)	WILMINGTON AVE (N)	AC	E	2	777	26	18,785	6/11/24	19	67	30	3	New Construction - Initial	1/1/80
1910	1	MAYO AVE (S)	GREENLEAF BLVD (E)	BENNETT ST (E)	AC	E	2	621	25	16,088	6/24/24	19	35	54	11	New Construction - Initial	1/1/80
1950	2	MEALY SY (E)	TAMARIND AVE	ALAMEDA ST SB	PCC	E	2	192	32	6,660	6/25/24	20	9	71	20	New Construction - Initial	1/1/80
510	3	ARBUTUS ST (W)	BROADACRES AVE (N)	END	AC	E	2	1,204	36	31,616	5/30/24	20	22	65	13	New Construction - Initial	1/1/80
1970	1	MONA BLVD (N)	CITY LIMITS	MEALY ST (E)	AC	E	2	1,249	36	43,621	6/4/24	20	21	79	0	New Construction - Initial	1/1/80
900	1	CASWELL AVE (S)	154TH ST (W)	156TH ST (W)	AC	E	2	438	36	11,646	6/3/24	20	4	82	14	New Construction - Initial	1/1/80
2630	1	SPRAGUE ST (W)	KALSMAN AVE (N)	END (E)	AC	E	2	260	21	10,855	4/15/24	20	25	57	18	New Construction - Initial	1/1/80
1670	1	KENESAW AVE (N)	127TH PL (W)	127TH ST (W)	AC	E	2	228	27	5,693	5/28/24	20	20	80	0	Surface Treatment - Cape Seal	1/19/16
2260	2	PINE ST	ALAMEDA ST (N)	SANTA FE AVE (N)	AAC	E	2	1,673	33	56,955	6/17/24	20	23	60	17	Overlay - AC Structural	1/18/11
2810	4	TICHENOR ST	HILLFORD AVE (S)	TAJAUTA AVE (S)	AC	E	2	715	35	25,034	4/12/24	20	19	73	8	New Construction - Initial	1/1/80
1440	4	GRANDEE AVE	POPLAR ST (W)	SPRUCE ST (W)	AC	E	2	982	29	25,364	5/30/24	20	5	95	0	New Construction - Initial	1/1/80
620	2	BALES ST	LOCUST AVE (N)	CITY LIMITS	AC	E	2	497	36	13,597	6/4/24	20	12	67	21	New Construction - Initial	1/1/80
90	1	134TH ST (W)	SALINAS AVE (N)	BAHAMA AVE (N)	AC	E	2	1,486	36	55,476	5/28/24	20	20	67	13	New Construction - Initial	1/1/80
2050	1	OAKS ST	ALAMEDA ST (S)	ROSE AVE (N)	AAC	I	2	477	33	17,003	6/10/24	21	20	80	0	Surface Treatment - Slurry Seal	1/19/16
700	1	BILLINGS ST (W)	MCKINLEY AVE	WADSWORTH AVE (S)	AC	E	2	1,327	36	49,071	4/16/24	21	11	84	5	New Construction - Initial	1/1/80
870	2	CAROB ST (W)	526' E/O WILMINGTON AVE (S)	ACACIA AVE (S)	AC	E	2	2,963	36	107,801	6/10/24	21	16	82	2	New Construction - Initial	1/1/80
2060	1	OLANDA ST	CITY LIMITS	STONEACRE AVE (N)	AC	E	2	357	28	9,537	4/17/24	21	21	79	0	New Construction - Initial	1/1/80
760	5	BRAZIL ST (W)	KEMP AVE (N)	END	AC	E	2	305	36	7,884	6/11/24	21	19	66	15	New Construction - Initial	1/1/80
1000	1	CLYMAR AVE (S)	154TH ST (W)	156TH ST (W)	AC	E	2	440	36	11,781	4/5/24	21	11	71	18	New Construction - Initial	1/1/80
1440	1	GRANDEE AVE	BENNETT ST (W)	CALDWELL ST (W)	AC	E	2	948	34	30,357	4/12/24	21	12	88	0	New Construction - Initial	1/1/80
1860	1	MANETTE PL (S)	MCMILLAN ST (E)	HALO DR (S)	AC	E	2	609	36	21,459	6/26/24	21	29	70	1	New Construction - Initial	1/1/80
1630	3	KALSMAN AVE (N)	133RD ST (W)	END (N)	AC	E	2	502	36	17,563	4/15/24	21	16	69	15	New Construction - Initial	1/1/80
1940	11	MCMILLAN ST	STONEACRE AVE (N)	111' W of CASTLEGATE	AC	E	1	353	17	5,551	4/17/24	21	29	67	4	New Construction - Initial	1/1/80
750	1	BRADFIELD AVE (S)	COMPTON BLVD (E)	LAUREL ST (E)	AC	E	2	676	36	17,492	4/18/24	21	9	91	0	New Construction - Initial	1/1/80
890	2	CASTLEGATE AVE (N)	OLANDA ST	MCMILLAN ST (E)	AC	E	2	877	36	23,137	4/17/24	21	23	77	0	New Construction - Initial	1/1/80
2540	3	SCHOOL ST	BROADACRES AVE (N)	KEMP AVE (N)	AC	E	2	1,020	29	26,417	6/11/24	22	18	67	15	New Construction - Initial	1/1/80
1880	1	MAPLE ST (W)	DWIGHT AVE (N)	PACIFIC AVE (W)	AC	E	2	382	26	9,480	5/30/24	22	22	66	12	New Construction - Initial	1/1/80
3110	1	BROADACRES AVE (S)	BENNETT ST (W)	CALDWELL ST (W)	AC	E	2	947	36	24,948	4/12/24	22	5	94	1	New Construction - Initial	1/1/80
2150	3	PALMER ST (W)	TAJAUTA AVE (N)	MAIE AVE (N)	AC	E	2	736	27	19,286	6/5/24	22	17	77	6	New Construction - Initial	1/1/80
850	1	CALIFORNIA AVE (S)	GREENLEAF BLVD (E)	BENNETT ST (E)	AC	E	2	622	36	15,984	6/24/24	22	34	66	0	New Construction - Initial	1/1/80
2050	2	OAKS ST	ROSE AVE (N)	SANTA FE AVE (N)	AAC	I	2	1,198	33	41,859	6/10/24	23	20	71	9	Surface Treatment - Slurry Seal	1/16/16
3120	5	BURRIS AVE (S)	CALDWELL ST (E)	GREENLEAF BLVD (E)	AC	E	2	1,335	36	43,463	6/24/24	23	28	64	8	New Construction - Initial	1/1/80
1770	1	LOCUST CIR (S)	HOLLY AVE (S)	HOLLY AVE (S)	AAC	E	2	1,209	25	35,828	4/18/24	23	13	72	15	Overlay - AC Structural	6/21/16
720	1	BOWEN AVE (N)	ELM ST (E)	PALMER ST (E)	PCC	E	0	497	28	14,308	6/17/24	23	7	68	25	New Construction - Initial	1/1/80
3140	2	CEDAR ST (E)	WILLOWBROOK AVE	ALAMEDA ST	PCC	E	2	916	36	23,921	6/4/24	23	33	55	12	Surface Treatment - Slurry Seal	1/19/16
2100	1	ORIS ST	PAULSEN AVE (N)	CITY LIMITS	AC	E	2	88	20	1,592	6/18/24	23	12	82	6	New Construction - Initial	1/1/80
850	2	CALIFORNIA AVE (S)	BENNETT ST (E)	CALDWELL ST (E)	AC	E	2	560	36	14,556	6/24/24	23	20	74	6	New Construction - Initial	1/1/80
890	1	CASTLEGATE AVE (N)	CITY LIMITS	OLANDA ST	AC	E	2	942	36	25,156	4/17/24	23	17	69	14	New Construction - Initial	1/1/80
1550	1	HATCHWAY ST (W)	PAULSEN AVE (N)	CITY LIMITS	AC	E	2	75	36	1,409	6/18/24	23	5	73	22	New Construction - Initial	1/1/80
3210	1	ESSEY AVE (N)	PIXLEY ST (E)	SAUNDERS ST (E)	AC	E	2	360	32	12,278	6/4/24	23	31	69	0	New Construction - Initial	1/1/80
170	1	150TH ST (E)	CITY LIMITS	CENTRAL AVE (N)	AC	E	2	158	36	3,759	4/16/24	24	33	67	0	New Construction - Initial	1/1/80
2020	6	NESTOR AVE (N)	133RD ST (W)	END (N)	AC	E	2	268	32	10,881	4/15/24	24	23	77	0	New Construction - Initial	1/1/80
720	2	BOWEN AVE (N)	PALMER ST (E)	COMPTON BLVD (E)	PCC	E	0	775	28	22,859	6/17/24	24	7	59	34	New Construction - Initial	1/1/80
1530	1	HASKINS AVE	CALDWELL ST (W)	END (S)	AC	E	2	415	24	11,200	4/5/24	24	21	70	9	New Construction - Initial	1/1/80
3610	2	CRANE CT	MARCELLE ST	END PCC	PCC	E	2	93	31	2,276	3/7/24	24	21	60	19	New Construction - Initial	1/1/80
990	3	CLIVEDEN AVE (S)	CALDWELL ST (W)	BENNETT ST (W)	AC	E	2	948	36	25,362	4/12/24	24	18	81	1	New Construction - Initial	1/1/80
2330	2	POPLAR ST	NESTOR AVE (N)	TAJAUTA AVE (N)	AC	E	2	740	35	22,916	6/3/24	24	10	84	6	New Construction - Initial	1/1/80

BranchID	Sec ID	Name	From	To	Surface Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
50	3	131TH ST (W)	COMPTON AVE (N)	GRANDEE AVE (N)	AC	E	2	953	26	24,468	5/29/24	25	45	51	4	New Construction - Initial	1/1/80
2330	6	POPLAR ST	END (W)	WILLMINGTON AVE (N)	AC	E	2	450	27	11,972	6/11/24	25	41	45	14	New Construction - Initial	1/1/80
1930	1	MCKINLEY AVE (S)	TICHENOR ST (W)	CALDWELL ST (W)	AC	E	2	348	28	10,430	4/16/24	25	32	68	0	New Construction - Initial	1/1/80
230	1	156TH ST (W)	CLYMAR AVE (S)	CORLETT AVE	AC	E	2	1,186	36	32,474	4/16/24	25	22	69	9	New Construction - Initial	1/1/80
2800	5	THORSON AVE	LAUREL ST (E)	COMPTON BLVD (E)	AC	E	2	681	27	16,824	4/18/24	25	19	74	7	New Construction - Initial	1/1/80
650	1	BARCLAY AVE (S)	156TH ST (W)	CYPRESS ST (W)	AC	E	2	1,175	36	41,929	6/3/24	25	22	78	0	New Construction - Initial	1/1/80
1140	5	CYPRESS ST (E)	BULLIS RD (S)	HOLLY AVE (S)	AC	E	2	1,483	36	39,552	4/18/24	25	22	76	2	New Construction - Initial	1/1/80
1160	1	DEADORA AVE (S)	END (N)	COMPTON BLVD (W)	AC	E	2	161	36	3,431	6/17/24	25	37	51	12	New Construction - Initial	1/1/80
2260	7	PINE ST	BRADFIELD AVE (N)	PANNES AVE (N)	AC	E	2	771	33	25,448	4/17/24	25	35	65	0	New Construction - Initial	1/1/80
300	5	ACACIA AVE	GREENLEAF BLVD (W)	BENNETT ST (W)	AAC	E	2	515	33	14,658	6/12/24	26	16	78	6	Overlay - AC Structural	6/21/16
3400	4	PALM ST (W)	OLEANDER AVE (S)	END	AC	E	2	592	33	21,264	6/5/24	26	15	72	13	New Construction - Initial	1/1/80
1740	1	LIME ST (S)	ALONDRA BLVD (E)	CITY LIMITS	AC	E	2	255	32	6,550	6/26/24	26	33	55	12	New Construction - Initial	1/1/80
2270	2	PIRU ST	PAULSEN AVE (N)	CITY LIMITS	AC	E	2	88	28	1,375	6/18/24	26	4	70	26	New Construction - Initial	1/1/80
3020	1	WILLOWBROOK AVE	MANVILLE ST (E)	STANLEY ST (E)	AC	I	2	815	26	20,740	4/5/24	27	19	81	0	New Construction - Initial	1/1/80
1910	7	MAYO AVE (S)	LAUREL ST (E)	COMPTON BLVD (E)	AC	E	2	674	28	17,191	6/3/24	27	31	64	5	New Construction - Initial	1/1/80
2540	2	SCHOOL ST	TAJAUTA AVE (N)	MAIE AVE (N)	AC	E	2	720	28	19,477	6/5/24	27	13	66	21	New Construction - Initial	1/1/80
1360	2	FRAILEY AVE (S)	McMILLAN ST (E)	CITY LIMITS	AC	E	2	88	30	3,197	6/26/24	27	21	65	14	New Construction - Initial	1/1/80
3270	4	KEMP AVE (N)	PACIFIC AVE (W)	PALMER ST (W)	AC	E	2	871	36	25,702	5/30/24	27	39	51	10	New Construction - Initial	1/1/80
940	1	CENTRAL AVE FRONTAGE	SAM LITTLETON ST	134TH ST (W)	AC	E	2	540	28	14,270	5/28/24	27	21	66	13	New Construction - Initial	1/1/80
2300	1	PLUM ST	KEMP AVE (N)	WILMINGTON AVE (N)	AAC	E	2	654	27	15,226	5/29/24	28	16	84	0	Overlay - AC Structural	1/18/11
1710	1	LANTANA ST	MCKINLEY AVE	WADSWORTH AVE (S)	AC	E	2	1,299	36	35,459	4/16/24	28	19	77	4	New Construction - Initial	1/1/80
50	4	131TH ST (W)	GRANDEE AVE (N)	WILMINGTON AVE (N)	AC	E	2	1,212	26	31,108	5/29/24	28	48	47	5	New Construction - Initial	1/1/80
3260	1	KEENE AVE (S)	CALDWELL ST (W)	TICHENOR ST (W)	AC	E	2	497	36	13,535	4/16/24	28	40	56	4	New Construction - Initial	1/1/80
1220	3	DWIGHT AVE (S)	ALONDRA BLVD (W)	CALDWELL ST (W)	AC	E	2	1,723	36	48,308	4/12/24	29	14	82	4	Surface Treatment - Slurry Seal	1/19/16
2370	1	REEVE ST	APRILLA AVE (S)	CENTER AVE (S)	AC	E	2	1,470	35	40,741	4/16/24	29	48	52	0	New Construction - Initial	1/1/80
2620	1	SPORTSMAN DR	CITY LIMIT (S)	ATLANTIC AVE (S)	AC	E	2	1,140	21	31,831	6/18/24	29	34	66	0	New Construction - Initial	1/1/80
3600	1	APRA ST (W)	VICTORIA ST (W)	RR TRACKS	AC	I	4	1,595	60	95,343	6/11/24	29	47	47	6	New Construction - Initial	1/1/80
750	2	BRADFIELD AVE (S)	LAUREL ST (E)	MYRRTH ST (E)	AC	E	2	670	36	18,977	4/18/24	29	7	90	3	New Construction - Initial	1/1/80
1260	6	ELM ST (E)	BURRIS AVE (N)	LONG BEACH BLVD (N)	AC	E	2	1,084	26	25,863	6/25/24	29	30	66	4	New Construction - Initial	1/1/80
1970	3	MONA BLVD (N)	CITY LIMITS (N)	CITY LIMITS (S)	AC	E	4	1,064	36	60,695	6/25/24	29	46	47	7	New Construction - Initial	1/1/80
470	1	ANDERSON AVE (S)	END	WALNUT ST (W)	AC	E	2	1,273	36	52,871	6/11/24	29	22	56	22	New Construction - Initial	1/1/80
800	3	BURRIS AVE (N)	PALMER ST (E)	COMPTON BLVD (E)	AC	E	2	842	36	20,822	6/25/24	30	27	52	21	New Construction - Initial	1/1/80
2610	6	SLOAN AVE	PALMER ST (E)	ELM ST (E)	AC	E	2	885	27	22,487	6/25/24	30	49	43	8	New Construction - Initial	1/1/80
1440	3	GRANDEE AVE	REEVE ST (W)	ALONDRA BLVD (W)	AC	E	2	562	34	19,472	4/12/24	30	40	55	5	New Construction - Initial	1/1/80
2850	1	VISALIA AVE	END (S)	CALDWELL ST (W)	AC	E	2	615	27	18,094	4/5/24	30	25	75	0	New Construction - Initial	1/1/80
3250	2	JOHNSON ST (W)	END (E)	OLEANDER AVE (S)	AC	E	2	548	36	13,651	6/12/24	30	28	72	0	New Construction - Initial	1/1/80
3220	3	GLENCOE ST (W)	ACACIA AVE (S)	OLEANDER AVE (S)	AAC	E	2	677	36	16,761	6/12/24	31	21	79	0	Surface Treatment - Slurry Seal	1/19/16
1840	2	MAIE AVE (N)	SCHOOL ST (W)	BRAZIL ST (W)	AC	E	2	505	33	17,888	6/5/24	31	50	50	0	New Construction - Initial	1/1/80
2360	5	RAYMOND ST	WILLMINGTON AVE (S)	CENTER ST (S)	AC	E	2	1,290	35	37,025	6/12/24	31	26	59	15	New Construction - Initial	1/1/80
2650	7	SPRUCE ST	KEMP AVE (N)	WILMINGTON AVE (N)	AC	E	2	645	28	15,568	6/11/24	31	68	29	3	New Construction - Initial	1/1/80
3580	1	DOMINGUEZ HILLS DR	VICTORIA ST (W)	CITY LIMITS (S)	AC	I	2	546	30	30,212	6/11/24	31	45	55	0	New Construction - Initial	1/1/80
2330	5	POPLAR ST	END (W)	END (E) OF KEMP	AC	E	2	535	27	13,859	5/30/24	31	14	71	15	New Construction - Initial	1/1/80
990	2	CLIVEDEN AVE (S)	TICHENOR ST (W)	CALDWELL ST (W)	AC	E	2	552	36	14,511	4/12/24	31	23	77	0	New Construction - Initial	1/1/80
2020	3	NESTOR AVE (N)	POPLAR ST (W)	145TH ST (W)	AC	E	2	374	32	11,758	6/5/24	32	59	41	0	New Construction - Initial	1/1/80
680	4	BENNETT ST (E)	MCKINLEY AVE	WADSWORTH AVE (S)	AC	E	2	1,285	38	43,275	4/5/24	32	28	68	4	New Construction - Initial	1/1/80
2360	6	RAYMOND ST	CENTER ST (S)	END (W)	AC	E	2	1,195	32	38,470	6/12/24	32	50	50	0	New Construction - Initial	1/1/80
1790	1	LUCIEN ST (W)	PAULSEN AVE (N)	END (E)	AC	E	2	80	18	1,475	6/18/24	32	11	89	0	New Construction - Initial	1/1/80
3290	4	LAUREL ST (W)	SHERER PL (S)	CENTER AVE (S)	AC	E	2	253	32	7,392	6/3/24	32	19	81	0	New Construction - Initial	1/1/80
2370	7	REEVE ST	GRANDEE AVE (S)	END (W)	AC	E	2	133	28	5,926	4/12/24	32	39	57	4	New Construction - Initial	1/1/80
3600	2	APRA ST (W)	RR TRACKS	ACACIA AVE (S)	AC	I	3	730	60	37,493	6/11/24	32	54	46	0	New Construction - Initial	1/1/80
2570	2	SHERER PL	LAUREL ST (W)	MYRRH LN (W)	AC	E	2	492	28	17,190	6/3/24	33	35	62	3	New Construction - Initial	1/1/80
130	5	138TH ST (W)	WILMINTON AVE (N)	PAULSEN AVE (N)	AC	E	2	752	36	23,023	6/18/24	33	23	75	2	New Construction - Initial	1/1/80
1400	2	GLENCOE AVE (E)	TEMPLE AVE (S)	BURRIS AVE (S)	AC	E	2	859	36	22,545	6/24/24	33	21	62	17	New Construction - Initial	1/1/80
2790	3	TEMPLE AVE	CALDWELL ST (E)	MARCELLE ST (E)	AC	E	2	530	40	29,463	6/25/24	33	42	41	17	New Construction - Initial	1/1/80
3080	2	WINONA AVE	WILLOWBROOK AVE (N)	MONA BLVD (N)	AC	E	2	546	40	18,763	6/4/24	33	15	85	0	New Construction - Initial	1/1/80
2310	3	POINSETTIA AVE (N)	ELM ST (E)	ROSECRANS AVE (E)	AC	E	2	970	27	24,703	6/26/24	34	58	37	5	New Construction - Initial	1/1/80
2490	2	SAN VINCENTE ST	BRADFIELD AVE (N)	HOLLY AVE (N)	AC	E	2	485	28	25,873	6/4/24	34	31	68	1	Cape Seal	1/1/15
1400	1	GLENCOE AVE (E)	LONG BEACH BLVD (S)	TEMPLE AVE (S)	AC	E	2	637	36	16,294	6/24/24	34	30	67	3	Slurry Seal	1/1/17
2810	7	TICHENOR ST	CENTER ST (S)	OLEANDER AVE (S)	AC	E	2	1,365	30	40,259	6/12/24	34	44	55	1	New Construction - Initial	1/1/80
370	1	ALHAMBRA AVE	POPPY AVE (N)	ARLINGTON ST (E)	AC	E	2	951	16	15,884	6/19/24	34	36	63	1	New Construction - Initial	1/1/80

BranchID	Sec ID	Name	From	To	Surface Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
970	3	CLAUDE ST (W)	HILLFORD AVE (S)	NESTOR AVE (S)	AC	E	2	513	36	13,494	4/12/24	34	32	65	3	New Construction - Initial	1/1/80
1110	3	CRESSEY ST (W)	KEMP AVE (N)	WILMINGTON AVE (N)	AAC	E	2	654	36	15,265	5/29/24	34	13	84	3	Overlay - AC Structural	1/18/11
1840	1	MAIE AVE (N)	COMPTON BLVD (W)	SCHOOL ST (W)	AC	E	2	437	36	12,198	6/5/24	34	61	32	7	New Construction - Initial	1/1/80
680	8	BENNETT ST (E)	WILMINGTON AVE (S)	CENTER AVE (S)	AC	E	2	1,280	30	38,239	6/12/24	34	26	47	27	New Construction - Initial	1/1/80
1250	3	ELIZABETH ST (E)	CITY LIMITS	MURIAL AVE (S)	AC	E	2	278	33	9,067	6/25/24	35	24	64	12	New Construction - Initial	1/1/80
490	1	APRILIA AVE (S)	BENNETT ST (W)	CLAUDE ST (W)	AC	E	2	713	36	19,920	4/16/24	35	21	78	1	New Construction - Initial	1/1/80
2320	1	POINSETTIA AVE (S)	BENNETT ST (E)	CALDWELL ST (E)	AC	E	2	719	35	19,099	6/25/24	35	30	54	16	Surface Treatment-Cape Seal	1/19/16
1940	3	MCMILLAN ST	PINE ST (E)	HARRIS AVE (N)	AC	E	1	306	17	9,192	4/17/24	35	15	85	0	New Construction - Initial	1/1/80
2020	4	NESTOR AVE (N)	145TH ST (W)	ROSECRANS AVE (E)	AC	E	2	783	32	23,215	6/5/24	35	53	47	0	New Construction - Initial	1/1/80
2560	1	SHAUER ST	PAULSEN AVE (N)	CITY LIMIT (E)	AC	E	2	80	25	1,568	6/18/24	35	26	74	0	New Construction - Initial	1/1/80
2810	8	TICHENOR ST	OLEANDER AVE (S)	END (E)	AC	E	2	242	29	6,570	6/12/24	35	14	86	0	Cape Seal	1/1/15
2260	4	PINE ST	ALHAMBRA AVE (N)	SHORT AVE (N)	AC	E	2	895	33	29,295	6/19/24	35	47	49	4	New Construction - Initial	1/1/80
3190	6	DWIGHT AVE (N)	POPLAR ST	ARBUTUS ST (W)	AC	E	2	263	26	6,718	5/30/24	36	27	65	8	Complete Reconstruction - AC	5/1/16
1520	2	HARRIS AVE	PAULINE ST (E)	ALONDRA BLVD (E)	AC	E	2	1,349	28	34,003	6/18/24	36	24	57	19	New Construction - Initial	1/1/80
2360	1	RAYMOND ST	APRILLA AVE (S)	REEVE ST (W)	AC	E	2	1,275	33	36,751	4/16/24	36	48	49	3	New Construction - Initial	1/1/80
660	1	BARRON AVE (S)	END	CYPRESS ST (W)	AC	E	2	243	36	11,214	6/3/24	36	33	67	0	New Construction - Initial	1/1/80
2800	4	THORSON AVE	MYRRH ST (E)	LAUREL ST (E)	AC	E	2	660	27	17,237	4/18/24	36	11	74	15	New Construction - Initial	1/1/80
510	2	ARBUTUS ST (W)	TAJAUTA AVE (N)	BROADACRES AVE (N)	AC	E	2	972	36	31,384	5/30/24	37	35	63	2	New Construction - Initial	1/1/80
2070	4	OLEANDER AVE (N)	CEDAR ST (W)	ROSECRANS AVE (W)	AC	E	2	737	28	17,883	6/4/24	37	38	62	0	New Construction - Initial	1/1/80
10	2	127TH PL (W)	GRANDEE AVE (N)	127TH ST (W)	AC	E	2	575	27	15,789	5/28/24	37	27	73	0	Surface Treatment-Cape Seal	1/19/16
1300	1	EVARG AVE (S)	CALDWELL ST (W)	TICHENOR ST (W)	AC	E	2	383	26	10,066	4/16/24	37	33	59	8	New Construction - Initial	1/1/80
1140	1	CYPRESS ST (E)	WILLOWBROOK AVE (S)	TAMARIND AVE (S)	AC	E	2	609	36	21,323	6/5/24	37	30	70	0	New Construction - Initial	1/1/80
970	2	CLAUDE ST (W)	APRILIA AVE (S)	AMANTHA AVE (S)	AC	E	2	1,179	36	33,703	4/16/24	37	58	42	0	New Construction - Initial	1/1/80
1260	3	ELM ST (E)	ALAMEDA ST (N)	ROSS AVE (N)	AC	E	2	407	25	9,260	6/25/24	38	37	44	19	New Construction - Initial	1/1/80
2000	3	MURIEL AVE (S)	PIXLEY ST (E)	ROSECRANS AVE (E)	AC	E	2	690	28	16,654	6/4/24	38	53	46	1	New Construction - Initial	1/1/80
470	2	ANDERSON AVE (S)	WALNUT ST (W)	ARTESIA BLVD (W)	AC	E	2	727	36	24,806	6/11/24	38	58	42	0	New Construction - Initial	1/1/80
2080	4	OLEANDER AVE (S)	ALONDRA BLVD (W)	REEVE ST (W)	AC	E	2	659	33	18,797	6/12/24	38	42	53	5	New Construction - Initial	1/1/80
1120	4	CULVER AVE (N)	ROSECRANS AVE (E)	CEDAR AVE (N)	AC	E	2	747	36	20,917	2/29/24	39	35	65	0	Surface Treatment - Slurry Seal	1/19/16
1260	2	ELM ST (E)	TAMARIND AVE (N)	ALAMEDA ST (N)	AC	E	2	543	25	9,131	6/4/24	39	39	59	2	New Construction - Initial	1/1/80
3300	1	LOCUST AVE (S)	COMPTON BLVD (E)	MYRRH ST (E)	AC	E	2	1,343	25	33,024	4/18/24	39	54	46	0	New Construction - Initial	1/1/80
870	1	CAROB ST (W)	WILMINGTON AVE (S)	526' E/O WILMINGTON AVE (S)	AC	E	2	526	36	18,102	6/10/24	39	41	59	0	New Construction - Initial	1/1/80
60	5	132ND ST (W)	GRANDEE AVE (N)	WILMINGTON AVE (N)	AC	E	2	1,210	36	31,762	5/29/24	39	10	86	4	New Construction - Initial	1/1/80
1930	2	MCKINLEY AVE (S)	CALDWELL ST (W)	BILLINGS ST (W)	AC	E	2	720	28	20,092	4/16/24	39	32	59	9	New Construction - Initial	1/1/80
3150	1	CHESTER AVE (N)	COMPTON BLVD (E)	PALMER ST (E)	AC	E	2	843	36	20,878	6/25/24	39	43	39	18	New Construction - Initial	1/1/80
3570	4	HILLFORD AVE (S)	REEVE ST (W)	RAYMOND ST (W)	AC	E	2	292	30	9,860	4/12/24	39	55	45	0	New Construction - Initial	1/1/80
2460	4	SAN LUIS ST	CITY LIMIT	CITY LIMIT	AC	E	2	98	32	5,376	6/26/24	39	70	29	1	New Construction - Initial	1/1/80
1220	2	DWIGHT AVE (S)	MYRRH ST (S)	156TH ST (W)	AC	E	2	269	36	7,603	5/30/24	40	37	47	16	New Construction - Initial	1/1/80
2470	3	SAN MARCUS ST	HOLLY AVE (N)	END (W)	AC	E	2	130	31	4,447	6/4/24	40	31	68	1	New Construction - Initial	1/1/80
2330	1	POPLAR ST	CENTRAL AVE (N)	NESTOR AVE (N)	AAC	E	2	1,140	36	35,633	6/3/24	40	55	45	0	Overlay - AC Structural	6/2/10
2680	4	STOCKTON ST	BRADFORD AVE (N)	PANNES AVE (N)	AC	E	2	830	28	23,057	4/17/24	40	49	51	0	New Construction - Initial	1/1/80
180	1	151ST ST (W)	CENTRAL AVE (S)	NESTOR AVE (S)	AC	E	2	835	36	24,902	6/3/24	40	28	54	18	New Construction - Initial	1/1/80
2090	3	ORCHARD ST	PANNES AVE (N)	CITY LIMITS	AC	E	2	440	36	14,875	4/17/24	40	44	56	0	New Construction - Initial	1/1/80
1940	4	MCMILLAN ST	HARRIS AVE (N)	WALDORF DR (N)	AC	E	1	563	17	10,539	4/17/24	41	13	87	0	New Construction - Initial	1/1/80
3160	1	COCOA ST (E)	WILLOWBROOK AVE (S)	TAMARIND AVE (S)	AC	E	2	604	36	21,476	6/5/24	41	16	84	0	Surface Treatment - Slurry Seal	1/19/16
2970	1	WHITE AVE	CALDWELL ST (E)	ALONDRA BLVD (E)	AAC	E	2	1,330	31	36,095	6/18/24	41	24	47	29	Overlay - AC Structural	1/18/11
2650	5	SPRUCE ST	PACIFIC AVE (W)	END (W)	AC	E	2	105	28	3,506	5/30/24	41	33	37	30	New Construction - Initial	1/1/80
2640	3	SPRING AVE	ELM ST (E)	ROSECRANS AVE (E)	AC	E	2	950	24	21,038	6/25/24	41	55	26	19	New Construction - Initial	1/1/80
1500	1	HALO DR (S)	MCMILLAN ST (E)	MANETTE PL (S)	AC	E	2	578	36	22,214	6/26/24	41	36	64	0	Surface Treatment-Cape Seal	1/19/16
180	5	151ST ST (W)	DWIGHT AVE (N)	KEMP AVE (S)	AAC	E	2	568	36	14,525	6/3/24	41	32	68	0	Surface Treatment - Slurry Seal	1/19/16
50	2	131TH ST (W)	SLATER AVE (M)	COMPTON AVE (N)	AC	E	2	497	26	12,922	5/29/24	41	14	86	0	Surface Treatment - Slurry Seal	1/19/16
230	2	156TH ST (W)	CORLETT AVE	CENTRAL AVE (S)	AC	E	2	1,206	36	34,761	4/16/24	41	17	80	3	New Construction - Initial	1/1/80
2260	5	PINE ST	SHORT AVE (N)	LONG BEACH BLVD (N)	AC	E	2	773	33	23,902	6/19/24	42	59	27	14	New Construction - Initial	1/1/80
1250	2	ELIZABETH ST (E)	END PCC	CITY LIMITS	AC	E	2	163	30	4,711	6/18/24	42	31	69	0	Surface Treatment-Cape Seal	1/19/16
1570	1	HILLFORD AVE (N)	END (N)	POPLAR ST (W)	AC	E	2	397	36	13,269	6/3/24	42	20	80	0	Surface Treatment - Slurry Seal	1/19/16
3450	1	ALLEY SAN MARCUS	END (W)	CITY LIMITS (E)	AC	O	1	1,240	15	11,745	12/8/20	42	61	32	7	New Construction - Initial	1/1/80
1290	1	EUCLID AVE (E)	ALAMEDA ST (N)	CITY LIMITS	AC	E	2	1,631	37	58,798	6/24/24	42	34	65	1	Complete Reconstruction - AC	3/31/20
750	4	BRADFIELD AVE (S)	CYPRESS ST (E)	CITY LIMITS	AC	E	2	846	36	22,355	4/18/24	43	17	74	9	Cape Seal	1/1/15
3360	3	NESTOR AVE (S)	ALONDRA BLVD (W)	TICHENOR ST (W)	AC	E	2	1,197	32	38,196	4/12/24	43	65	35	0	New Construction - Initial	1/1/80
1940	1	MCMILLAN ST	BULLIS RD (N)	BRADFIELD AVE (N)	AAC	E	2	1,033	31	28,161	4/17/24	43	32	68	0	Overlay - AC Structural	1/18/11
1570	2	HILLFORD AVE (N)	ARBUTUS ST (W)	BRAZIL ST (W)	AC	E	2	249	36	6,817	6/5/24	43	54	46	0	New Construction - Initial	1/1/80

BranchID	Sec ID	Name	From	To	Surface Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
3240	2	INDIGO ST (W)	END (E)	END (W)	AC	E	2	299	36	13,643	6/3/24	43	45	55	0	New Construction - Initial	1/1/80
3340	1	MAYO AVE (N)	COMPTON BLVD (E)	PALMER ST (E)	AC	E	2	846	25	20,839	6/28/24	43	40	60	0	New Construction - Initial	1/1/80
660	3	BARRON AVE (S)	COMPTON BLVD (W)	ALMOND ST (W)	AC	E	2	619	36	15,356	6/5/24	43	8	84	8	New Construction - Initial	1/1/80
2700	2	STONEACRE AVE	CALDWELL ST (E)	ALONDRA BLVD (E)	AAC	E	2	1,330	30	38,653	6/18/24	43	28	72	0	Slurry Seal	5/1/16
1000	4	CLYMAR AVE (S)	ALONDRA BLVD	CLAUDE ST (W)	AC	E	2	785	30	23,280	4/5/24	43	44	56	0	New Construction - Initial	1/1/80
1010	3	COCOA AVE (W)	ACACIA AVE (S)	WILLOWBROOK AVE (S)	AC	E	2	647	36	24,379	6/5/24	43	34	66	0	New Construction - Initial	1/1/80
2810	6	TICHENOR ST	WILMINGTON AVE (S)	CENTER ST (S)	AC	E	2	1,290	32	39,247	6/12/24	43	34	66	0	New Construction - Initial	1/1/80
2050	4	OAKS ST	ALHAMBRA AVE (N)	SHORT AVE (N)	AC	E	2	866	32	25,171	6/19/24	43	41	59	0	New Construction - Initial	1/1/80
2330	12	POPLAR ST	TAMARIND AVE (N)	ALAMEDA ST (N)	AAC	I	2	407	28	8,753	6/4/24	43	21	76	3	Overlay - AC Structural	1/18/11
1520	8	HARRIS AVE	ROSECRANS AVE (E)	CITY LIMITS (N)	AC	E	2	164	39	2,731	6/26/24	43	52	47	1	New Construction - Initial	1/1/80
2530	1	SCHINNER ST	TEMPLE AVE (S)	LONG BEACH BLVD (S)	AC	E	2	495	31	13,204	6/24/24	44	39	58	3	Slurry Seal	1/1/17
2610	1	SLOAN AVE	BENNETT ST (E)	CALDWELL ST (E)	AC	E	2	715	32	19,017	6/25/24	44	32	48	20	Surface Treatment - Slurry Seal	1/19/16
2680	3	STOCKTON ST	WARD AVE (N)	BRADFORD AVE (N)	AC	E	2	660	28	17,845	4/17/24	44	43	30	27	New Construction - Initial	1/1/80
2190	2	PAULSEN AVE (N)	NORD ST (W)	STOCKWELL ST (W)	AAC	E	2	734	28	20,522	5/29/24	44	12	88	0	Overlay - AC Structural	1/18/11
2720	4	TAJAUTA AVE	154TH ST (W)	152ND ST (W)	AC	E	2	490	40	17,084	6/3/24	44	38	42	20	New Construction - Initial	1/1/80
1140	2	CYPRESS ST (E)	WILLOW ST (S)	CHESTER AVE (S)	AC	E	2	800	36	20,276	6/3/24	44	45	55	0	New Construction - Initial	1/1/80
2810	5	TICHENOR ST	TAJAUTA AVE (S)	CLIVEDEN AVE (S)	AC	E	2	690	36	22,622	4/12/24	44	11	89	0	New Construction - Initial	1/1/80
1280	2	ESSEY AVE (S)	CYPRESS ST (E)	LAUREL ST (E)	AC	E	2	1,332	32	38,258	4/18/24	44	12	87	1	Complete Reconstruction - AC	5/1/16
3180	6	CYPRESS ST (W)	CENTER AVE (W)	BARON AVE (S)	AC	E	2	625	36	19,793	6/3/24	44	38	62	0	New Construction - Initial	1/1/80
1890	3	MARCELLE ST (E)	LONG BEACH BLVD (S)	CITY LIMIT (E)	AC	E	2	349	28	5,291	6/3/24	45	65	24	11	New Construction - Initial	1/1/80
1250	1	ELIZABETH ST (E)	LONG BEACH BLVD (S)	END PCC	PCC	E	2	42	30	1,589	6/25/24	45	12	88	0	New Construction - Initial	1/1/80
2230	4	PEARL AVE (N)	ROSECRANS AVE (E)	PECK ST (E)	AC	E	2	864	26	21,928	6/17/24	45	51	12	37	New Construction - Initial	1/1/80
20	1	127TH ST (W)	KENESAW AVE (N)	CITY LIMITS	AC	E	2	1,173	27	32,115	5/28/24	45	32	68	0	Surface Treatment-Cape Seal	1/19/16
3470	3	MCKINLEY AVE (N)	SAM LITTLETON ST	SALINAS AVE (N)	AC	E	2	155	37	7,331	5/28/24	45	26	47	27	New Construction - Initial	1/1/80
680	9	BENNETT ST (E)	CENTER AVE (S)	OLEANDER AVE (S)	AC	E	2	1,355	32	43,764	6/12/24	45	37	48	15	New Construction - Initial	1/1/80
1320	1	EXMOOR AVE (S)	KEMP AVE (S)	CALDWELL ST (W)	AC	E	2	1,362	30	36,338	4/12/24	45	9	91	0	New Construction - Initial	1/1/80
1390	2	GLADYS ST (E)	SHERER PL (S)	END (W)	AC	E	2	165	35	7,592	6/3/24	45	47	52	1	New Construction - Initial	1/1/80
2720	3	TAJAUTA AVE	156TH ST (W)	154TH ST (W)	AC	E	2	580	38	18,322	6/3/24	45	45	49	6	New Construction - Initial	1/1/80
1660	3	KEMP AVE (S)	ALONDRA BLVD (W)	EXMOOR AVE (S)	AC	E	2	556	36	15,820	4/12/24	45	10	90	0	New Construction - Initial	1/1/80
2570	1	SHERER PL	PALM ST (W)	LAUREL ST (W)	AC	E	2	805	35	26,197	6/3/24	45	30	70	0	New Construction - Initial	1/1/80
960	1	CHESTER AVE (S)	GREENLEAF BLVD (E)	BENNETT ST (E)	AAC	E	2	619	36	16,328	6/3/24	46	15	85	0	Overlay - AC Structural	7/14/20
2920	1	WARD AVE	ALONDRA BLVD (E)	CYPRESS ST (E)	AAC	E	2	645	28	16,678	4/18/24	46	19	81	0	Overlay - AC Structural	1/18/11
2070	3	OLEANDER AVE (N)	ARBUTUS ST (W)	CEDAR ST (W)	AC	E	2	757	28	19,085	6/4/24	46	52	47	1	New Construction - Initial	1/1/80
3220	2	GLENCOE ST (W)	END (E)	ACACIA AVE (S)	AC	E	2	166	36	4,403	6/12/24	46	24	76	0	New Construction - Initial	1/1/80
400	6	ALMOND ST (W)	OLEANDER AVE (N)	END	AC	E	2	598	36	21,622	6/5/24	46	23	66	11	New Construction - Initial	1/1/80
300	4	ACACIA AVE	RR TRACKS	CAROB ST (W)	AC	I	2	225	44	8,266	6/10/24	46	33	67	0	New Construction - Initial	1/1/80
2800	2	THORSON AVE	CITY LIMITS (S)	ALONDRA BLVD (E)	AC	E	2	175	42	3,762	6/25/24	46	9	37	54	New Construction - Initial	1/1/80
1660	1	KEMP AVE (S)	COMPTON BLVD (W)	152ND ST (W)	AC	E	2	538	36	10,351	6/3/24	46	24	62	14	Surface Treatment - Slurry Seal	1/19/16
2610	5	SLOAN AVE	COMPTON BLVD (E)	PALMER ST (E)	AC	E	2	845	29	20,657	6/26/24	46	63	35	2	New Construction - Initial	1/1/80
210	6	154TH ST (W)	NESTOR AVE (S)	TAJAUTA AVE (S)	AC	E	2	800	36	24,786	6/3/24	47	43	41	16	New Construction - Initial	1/1/80
2310	1	POINSETTIA AVE (N)	COMPTON BLVD (E)	PALMER ST (E)	AC	E	2	847	31	20,649	6/25/24	47	53	46	1	New Construction - Initial	1/1/80
2800	7	THORSON AVE	ROSECRANS AVE (E)	CITY LIMITS (N)	AC	E	2	205	30	4,421	4/17/24	47	22	72	6	New Construction - Initial	1/1/80
2360	2	RAYMOND ST	HILLFORD AVE (S)	NESTOR AVE (S)	AC	E	2	475	34	17,296	4/12/24	47	58	33	9	New Construction - Initial	1/1/80
2130	1	PALM ST	BULLIS RD (S)	BOWEN CT (S)	AC	E	2	168	33	4,753	4/18/24	47	34	66	0	New Construction - Initial	1/1/80
750	3	BRADFIELD AVE (S)	MYRRTH ST (E)	CYPRESS ST (E)	AC	E	2	658	36	18,547	4/18/24	47	46	52	2	New Construction - Initial	1/1/80
1120	3	CULVER AVE (N)	DOUGLAS ST (W)	ROSECRANS AVE (W)	AC	E	2	679	36	24,206	6/4/24	47	25	75	0	Surface Treatment - Slurry Seal	1/19/16
1150	1	DALHART AVE (N)	EL SEGUNDO BLVD (W)	END (N)	AC	E	2	434	36	10,744	5/28/24	47	50	50	0	Surface Treatment-Cape Seal	1/19/16
1720	1	LARGO AVE	MONA BLVD (N)	CITY LIMIT (N)	AC	E	2	632	43	22,639	6/4/24	47	39	61	0	New Construction - Initial	1/1/80
1660	4	KEMP AVE (S)	EXMOOR AVE (S)	CALDWELL ST (W)	AC	E	2	1,141	36	30,661	4/12/24	48	14	86	0	New Construction - Initial	1/1/80
1580	2	HOLLY AVE (N)	SAN VINCENTE ST (E)	COMPTON BLVD (E)	AC	E	2	1,206	36	33,068	6/4/24	48	41	58	1	Surface Treatment-Cape Seal	1/19/16
2390	2	ROSE AVE	PALMER ST (E)	ELM ST (E)	AC	E	2	880	20	16,914	6/10/24	48	25	44	31	New Construction - Initial	1/1/80
2580	2	SHORT AVE	ARLINGTON ST (E)	CITY LIMITS (N)	AC	E	2	825	28	21,557	6/19/24	48	46	49	5	New Construction - Initial	1/1/80
2230	3	PEARL AVE (N)	ELM ST (E)	ROSECRANS AVE (E)	AC	E	2	965	26	24,755	6/25/24	48	39	31	30	New Construction - Initial	1/1/80
2310	2	POINSETTIA AVE (N)	PALMER ST (E)	ELM ST (E)	AC	E	2	886	28	22,625	6/26/24	48	66	34	0	New Construction - Initial	1/1/80
500	2	ARANBE AVE	CYPRESS ST (W)	WINDIGO ST	AC	E	2	635	34	19,175	6/3/24	48	43	56	1	New Construction - Initial	1/1/80
960	2	CHESTER AVE (S)	CALDWELL ST (E)	ALONDRA BLVD (E)	AAC	E	2	1,338	36	34,279	6/24/24	48	30	62	8	Overlay - AC Structural	7/14/20
2780	2	TARTAR LN	CLEMMER DR (E)	IGREENLEAF BLVD (E)	AC	E	1	700	18	10,898	3/7/24	49	14	72	14	New Construction - Initial	1/1/80
400	3	ALMOND ST (W)	GRAPE AVE (S)	SHERER PL (S)	AC	E	2	742	36	23,315	6/3/24	49	36	64	0	New Construction - Initial	1/1/80
2370	2	REEVE ST	CENTER AVE (S)	NESTOR AVE (S)	AC	E	2	830	36	26,025	4/12/24	49	57	43	0	New Construction - Initial	1/1/80
3270	5	KEMP AVE (N)	PALMER AVE (W)	COMPTON BLVD (W)	AC	E	2	711	36	20,959	5/30/24	49	44	56	0	Surface Treatment - Slurry Seal	1/19/16

BranchID	Sec ID	Name	From	To	Surface Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
1450	4	GRAPE AVE (N)	PALM ST (W)	ALMOND ST (W)	AC	E	2	580	36	18,068	6/3/24	49	41	57	2	New Construction - Initial	1/1/80
2680	1	STOCKTON ST	ALHAMBRA AVE (N)	SHORT AVE(N)	PCC	E	2	880	28	19,398	6/19/24	49	11	44	45	New Construction - Initial	1/1/80
2870	3	WADSWORTH AVE	COMPTON BLVD (W)	CITY LIMITS (N)	AC	E	2	152	26	3,114	6/17/24	49	57	33	10	New Construction - Initial	1/1/80
3570	3	HILLFORD AVE (S)	TICHENOR ST (W)	REEVE ST (W)	AC	E	2	590	30	16,258	4/12/24	49	64	23	13	New Construction - Initial	1/1/80
1520	7	HARRIS AVE	CITY LIMITS (S)	ROSECRANS AVE (E)	AC	E	2	183	39	4,576	6/26/24	50	46	54	0	New Construction - Initial	1/1/80
1610	2	JOHNSON ST (E)	TAMARIND AVE (S)	ALAMEDA ST (S)	AC	E	2	826	36	20,196	6/12/24	50	12	88	0	New Construction - Initial	1/1/80
820	2	BUTLER AVE (S)	ADANA ST (E)	CALDWELL ST (E)	AAC	E	2	959	36	26,299	6/18/24	50	18	82	0	Slurry Seal	5/1/16
3190	5	DWIGHT AVE (N)	SCHOOL ST (W)	COMPTON BLVD (W)	AC	E	2	487	36	11,066	5/30/24	50	24	75	1	Surface Treatment - Slurry Seal	1/19/16
3340	2	MAYO AVE (N)	PALMER ST (E)	ELM ST (E)	AC	E	2	885	28	23,387	6/10/24	50	29	37	34	New Construction - Initial	1/1/80
2040	5	NORTHWOOD AVE (S)	156TH ST (W)	LAUREL ST (W)	AC	E	2	568	33	16,222	5/30/24	50	35	56	9	New Construction - Initial	1/1/80
2720	1	TAJAUTA AVE	TICHEROR ST (W)	ALONDRA BLVD (W)	AC	E	2	1,180	30	31,514	4/12/24	50	83	17	0	New Construction - Initial	1/1/80
3540	1	CYPRESS CIR (W)	ARANBE AVE (S)	END (E)	AC	E	2	172	32	7,434	6/3/24	50	61	37	2	New Construction - Initial	1/1/80
2720	5	TAJAUTA AVE	152ND ST (W)	COMPTON BLVD (W)	AC	E	2	515	40	17,466	6/3/24	50	37	44	19	New Construction - Initial	1/1/80
2580	1	SHORT AVE	POPPY AVE (E)	ARLINGTON ST (E)	AC	E	2	780	27	21,179	6/19/24	50	70	23	7	New Construction - Initial	1/1/80
2050	5	OAKS ST	SHORT AVE (N)	LONG BEACH BLVD (N)	AC	E	2	864	32	23,400	6/19/24	50	48	49	3	New Construction - Initial	1/1/80
2810	2	TICHENOR ST	APRILLA AVE (S)	EVARG AVE (S)	AC	E	2	640	30	19,075	4/16/24	50	42	58	0	New Construction - Initial	1/1/80
150	2	145TH ST (W)	ALBERTSON AVE (N)	NESTOR AVE (N)	AC	E	2	264	36	6,305	6/3/24	51	42	58	0	Slurry Seal	1/1/15
460	5	AMANTHA AV	REEVE ST (W)	CALDWELL ST (W)	AC	E	2	1,136	30	34,304	4/16/24	51	42	58	0	Surface Treatment - Slurry Seal	1/19/16
2080	1	OLEANDER AVE (S)	COMPTON BLVD (W)	ALMOND ST (W)	AC	E	2	672	33	20,602	6/4/24	51	46	12	42	New Construction - Initial	1/1/80
2950	1	WAYSIDE ST	PAULSEN AVE (N)	CITY LIMITS (E)	AC	E	2	65	22	1,231	6/18/24	51	44	56	0	New Construction - Initial	1/1/80
3590	1	EDISON WAY (S)	VICTORIA ST (W)	END (N)	AC	I	2	495	30	24,762	6/11/24	51	75	25	0	New Construction - Initial	1/1/80
2780	1	TARTAR LN	SANTE FE AVE (S)	CLEMMER DR (E)	AC	E	1	810	18	16,037	3/7/24	51	12	70	18	New Construction - Initial	1/1/80
2190	1	PAULSEN AVE (N)	131ST ST (W)	NORD ST (W)	AAC	E	2	790	28	21,872	5/29/24	51	15	85	0	Overlay - AC Structural	1/18/11
230	3	156TH ST (W)	CENTRAL AVE (S)	TAJAUTA AVE (S)	AC	E	2	1,453	36	51,769	4/5/24	51	28	72	0	Surface Treatment - Slurry Seal	1/19/16
60	4	132ND ST (W)	COMPTON AVE (N)	GRANDEE AVE (N)	AAC	E	2	957	36	25,008	5/29/24	52	9	78	13	Overlay - AC Structural	7/14/20
1260	5	ELM ST (E)	SANTA FE AVE (N)	BURRIS AVE (N)	AC	E	2	1,289	26	33,163	6/25/24	52	38	52	10	Surface Treatment - Slurry Seal	1/19/16
2980	2	WHITEMARSH AVE	CALDWELL ST (W)	RAYMOND ST (W)	AC	E	2	1,150	31	32,971	4/12/24	52	10	84	6	New Construction - Initial	1/1/80
3340	3	MAYO AVE (N)	ELM ST (E)	ROSECRANS AVE (E)	AC	E	2	964	28	22,164	6/10/24	52	37	34	29	New Construction - Initial	1/1/80
2160	4	PANNES AVE (N)	PINE ST (E)	ORCHARD ST (E)	AAC	E	2	772	26	21,296	4/17/24	52	8	65	27	Overlay - AC Structural	7/14/20
500	1	ARANBE AVE	COCOA ST (W)	CYPRESS ST (W)	AC	E	2	265	32	8,876	6/3/24	52	38	62	0	Surface Treatment-Cape Seal	1/19/16
2370	5	REEVE ST	WILLOWBROOK AVE (S)	TAMARIND AVE (S)	AC	E	2	577	28	15,892	6/12/24	52	42	58	0	New Construction - Initial	1/1/80
3480	1	ACACIA CT	ACACIA AVE (S)	END (W)	AC	I	2	285	40	13,674	6/10/24	52	48	52	0	New Construction - Initial	1/1/80
2230	5	PEARL AVE (N)	PECK ST (E)	END	AC	E	2	788	26	21,674	6/17/24	52	53	4	43	New Construction - Initial	1/1/80
760	3	BRAZIL ST (W)	BROADACRES AVE (N)	DWIGHT AVE (N)	AC	E	2	355	36	8,946	6/11/24	53	21	54	25	Surface Treatment - Slurry Seal	1/19/16
1640	3	KAY ST (E)	BULLIS RD (N)	BRADFIELD AVE (N)	AAC	E	2	640	36	17,623	4/17/24	53	24	66	10	Overlay - AC Structural	1/18/11
2390	3	ROSE AVE	ELM ST (E)	ROSECRANS AVE (E)	AC	E	2	950	28	25,074	6/10/24	53	36	22	42	New Construction - Initial	1/1/80
2070	6	OLEANDER AVE (N)	CRESSEY ST (W)	CITY LIMITS	AC	E	2	806	28	19,498	6/4/24	53	94	6	0	New Construction - Initial	1/1/80
990	1	CLIVEDEN AVE (S)	154TH ST (W)	156TH ST (W)	AC	E	2	565	36	14,213	5/30/24	53	34	66	0	New Construction - Initial	1/1/80
1730	1	LAUREL ST (E)	SOUTHERN PACIFIC RR	WILLOW AVE (S)	AC	E	2	658	32	17,700	6/10/24	53	40	51	9	New Construction - Initial	1/1/80
2670	1	STANLEY ST	WILLOWBROOK AVE (S)	MANVILLE ST (E)	AC	I	2	1,685	25	48,005	4/5/24	53	37	52	11	New Construction - Initial	1/1/80
2370	3	REEVE ST	OLEANDER AVE (S)	ACACIA AVE (S)	AC	E	2	620	26	16,916	6/12/24	53	45	55	0	New Construction - Initial	1/1/80
680	10	BENNETT ST (E)	OLEANDER AVE (S)	ACACIA AVE (S)	AC	E	2	652	40	21,375	6/12/24	53	38	62	0	New Construction - Initial	1/1/80
150	1	145TH ST (W)	HILLFORD AVE (N)	ALBERTSON AVE (N)	AC	E	2	714	36	18,472	6/3/24	53	35	57	8	Surface Treatment - Slurry Seal	1/19/16
2400	1	ROSE ST	CITY LIMITS (E)	GIBSON AVE (S)	AC	E	2	250	26	8,030	3/7/24	53	46	37	17	New Construction - Initial	1/1/80
760	4	BRAZIL ST (W)	DWIGHT AVE (N)	KEMP AVE (N)	AC	E	2	670	36	16,861	6/11/24	53	23	50	27	Surface Treatment - Slurry Seal	1/19/16
180	2	151ST ST (W)	NESTOR AVE (S)	TAJAUTA AVE (S)	AC	E	2	796	36	25,057	6/3/24	54	29	39	32	New Construction - Initial	1/1/80
2490	6	SAN VINCENTE ST	WILLIAMS AVE (S)	CITY LIMIT (E)	AC	E	2	95	36	3,534	6/26/24	54	44	56	0	New Construction - Initial	1/1/80
3150	3	CHESTER AVE (N)	ELM ST (E)	ROSECRANS AVE (E)	AC	E	2	960	36	21,911	6/25/24	54	51	32	17	New Construction - Initial	1/1/80
2080	5	OLEANDER AVE (S)	REEVE ST (W)	CALDWELL ST (W)	AC	E	2	928	33	25,317	6/12/24	54	44	53	3	New Construction - Initial	1/1/80
3200	4	ELM ST (W)	OLEANDER AVE (N)	WILLOWBROOK AVE (N)	AC	E	2	1,577	25	40,319	2/29/24	54	65	30	5	New Construction - Initial	1/1/80
1220	1	DWIGHT AVE (S)	COMPTON BLVD (W)	ALMOND ST (W)	AC	E	2	834	36	26,670	5/30/24	54	34	53	13	Cape Seal	1/1/15
1140	3	CYPRESS ST (E)	CHESTER AVE (S)	BURRIS AVE (S)	AC	E	2	989	36	22,980	6/3/24	54	39	61	0	New Construction - Initial	1/1/80
1910	3	MAYO AVE (S)	CALDWELL ST (W)	ALONDRA BLVD (E)	AAC	E	2	1,497	30	39,878	6/24/24	54	28	68	4	Overlay - AC Structural	7/14/20
1510	1	HARLAN AVE (S)	ALONDRA BLVD	TICHENOR ST (W)	AC	E	2	1,199	36	31,455	4/12/24	54	53	43	4	New Construction - Initial	1/1/80
2230	2	PEARL AVE (N)	PALMER ST (E)	ELM ST (E)	AC	E	2	886	33	22,957	6/26/24	54	56	27	17	New Construction - Initial	1/1/80
2450	1	SAN CARLOS ST	GIBSON AVE (S)	CITY LIMITS (E)	AC	E	2	145	28	3,543	6/26/24	54	28	72	0	New Construction - Initial	1/1/80
960	4	CHESTER AVE (S)	MYRRH ST (E)	COMPTON BLVD (E)	AC	E	2	1,346	36	34,520	6/3/24	55	36	64	0	New Construction - Initial	1/1/80
2390	4	ROSE AVE	ROSECRANS AVE (E)	TUCKER ST (E)	AC	E	2	1,310	29	33,957	6/10/24	55	44	41	15	New Construction - Initial	1/1/80
2870	1	WADSWORTH AVE	BILLINGS ST (W)	CALDWELL ST (W)	AC	E	2	695	27	19,925	4/16/24	55	36	64	0	New Construction - Initial	1/1/80
1260	4	ELM ST (E)	ROSE AVE (N)	SANTA FE AVE (N)	AC	E	2	955	26	21,050	6/25/24	55	60	39	1	Surface Treatment - Slurry Seal	1/19/16

BranchID	Sec ID	Name	From	To	Surface Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
2260	8	PINE ST	PANNES AVE (N)	LOCUST AVE (N)	AC	E	2	524	33	17,946	4/17/24	55	47	53	0	New Construction - Initial	1/1/80
190	6	152ND ST (W)	DWIGHT AVE (N)	KEMP AVE (S)	AAC	E	2	578	36	15,934	6/3/24	55	13	70	17	Overlay - AC Structural	1/18/11
210	7	154TH ST (W)	TAJAUTA AVE (S)	DWIGHT AVE (S)	AAC	E	2	1,031	36	39,611	5/30/24	55	42	58	0	Overlay - AC Structural	6/2/10
3200	1	ELM ST (W)	DWIGHT AVE (N)	PACIFIC AVE (W)	AC	E	2	590	25	15,064	5/30/24	55	49	51	0	Surface Treatment - Slurry Seal	1/19/16
2200	1	PAULSEN CIR	CYPRESS ST (W)	END	AC	E	2	268	26	10,207	4/12/24	55	71	26	3	New Construction - Initial	1/1/80
2340	1	POPPY AVE	ALHAMBRA AVE (N)	SHORT AVE (N)	AC	E	2	847	32	24,926	6/19/24	55	57	21	22	New Construction - Initial	1/1/80
2640	4	SPRING AVE	ROSECRANS AVE (E)	PECK ST (E)	AC	E	2	622	27	16,654	6/10/24	55	51	24	25	New Construction - Initial	1/1/80
400	2	ALMOND ST (W)	DWIGHT AVE (N)	KEMP AVE (S)	AAC	E	2	986	36	30,512	5/30/24	56	17	83	0	Overlay - AC Structural	1/18/11
950	2	CHERRY ST (W)	KEMP AVE (N)	WILMNGTON AVE (N)	AAC	E	2	648	36	15,424	5/29/24	56	26	72	2	Overlay - AC Structural	1/18/11
630	1	BANDERA ST	STOCKWELL ST (W)	136TH ST (W)	AC	E	2	375	36	9,786	5/28/24	56	28	43	29	Surface Treatment - Slurry Seal	1/19/16
1920	3	MCDIVITT AVE (N)	TUCKER ST (E)	END (N)	AC	E	2	480	28	12,615	6/25/24	56	76	23	1	New Construction - Initial	1/1/80
3250	1	JOHNSON ST (W)	WILLOWBROOKO AVE (S)	ACACIA AVE (S)	AC	E	2	638	36	16,744	6/12/24	56	60	40	0	New Construction - Initial	1/1/80
3410	5	PANNES AVE (S)	CITY LIMIT	CITY LIMIT	AC	E	2	86	36	2,553	6/18/24	56	32	68	0	New Construction - Initial	1/1/80
2790	4	TEMPLE AVE	MARCELLE ST (E)	CITY LIMITS (E)	AC	E	2	520	40	26,409	6/25/24	56	33	67	0	New Construction - Initial	1/1/80
220	2	155TH ST (W)	NESTOR AVE (N)	TAJAUTA AVE (N)	AC	E	2	811	36	25,357	6/3/24	56	49	26	25	New Construction - Initial	1/1/80
3190	2	DWIGHT AVE (N)	ROSECRANS AVE (W)	MAPLE ST (W)	AC	E	2	487	36	11,891	5/30/24	56	27	67	6	Complete Reconstruction - AC	5/1/16
1940	6	MCMILLAN ST	COOKACRE AVE (S)	LIME AVE (S)	AC	E	1	539	17	8,423	4/17/24	56	22	78	0	New Construction - Initial	1/1/80
3150	5	CHESTER AVE (N)	TUCKER ST (E)	SANTA FE AVE (N)	AC	E	2	408	36	15,730	6/17/24	56	55	12	33	New Construction - Initial	1/1/80
3310	1	MAIE AVE (S)	COMPTON BLVD (W)	151ST ST (W)	AC	E	2	300	33	9,503	6/3/24	56	52	48	0	New Construction - Initial	1/1/80
2190	4	PAULSEN AVE (N)	138TH ST (W)	CHERRY ST (W)	AC	E	2	978	28	25,721	6/18/24	56	69	30	1	New Construction - Initial	1/1/80
2810	3	TICHENOR ST	EVARG AVE (S)	AMANTHA AVE (S)	AC	E	2	505	30	14,791	4/16/24	57	65	35	0	New Construction - Initial	1/1/80
2320	7	POINSETTIA AVE (S)	LAUREL ST (E)	COMPTON BLVD (E)	AC	E	2	674	30	18,424	6/3/24	57	72	8	20	New Construction - Initial	1/1/80
2640	5	SPRING AVE	PECK ST (E)	TUCKER ST (E)	AC	E	2	650	27	16,995	6/10/24	57	54	28	18	New Construction - Initial	1/1/80
600	1	AUTO DR (S)	ALAMEDA ST (S)	SANTE FE AVE (S)	AC	I	2	583	30	36,502	6/24/24	57	69	31	0	New Construction - Initial	1/1/80
2920	2	WARD AVE	CYRESS ST (E)	MYRRH ST (E)	AAC	E	2	648	27	17,414	4/18/24	57	28	64	8	Overlay - AC Structural	1/18/11
3530	1	MYRRH LN	SHERER ST (S)	END (W)	AC	E	2	266	33	13,717	6/3/24	57	74	25	1	New Construction - Initial	1/1/80
510	1	ARBUTUS ST (W)	HILLFORD AVE (N)	NESTOR AVE (N)	AC	E	2	912	36	25,565	6/5/24	57	82	17	1	New Construction - Initial	1/1/80
1380	4	GIBSON ST (S)	CITY LIMITS	LINSLEY ST (E)	AC	E	2	1,478	35	41,804	3/7/24	58	42	55	3	Surface Treatment-Cape Seal	1/19/16
3310	3	MAIE AVE (S)	LAUREL ST (W)	156TH ST (W)	AC	E	2	564	33	16,118	5/30/24	58	42	58	0	New Construction - Initial	1/1/80
3400	2	PALM ST (W)	MATTHISEN AVE (S)	BARRON ST (S)	AC	E	2	911	33	26,493	6/5/24	58	20	70	10	New Construction - Initial	1/1/80
2640	6	SPRING AVE	TUCKER ST (E)	END (N)	AC	E	2	530	28	14,187	6/10/24	58	74	25	1	New Construction - Initial	1/1/80
2680	2	STOCKTON ST	SHORT AVE (N)	LONG BEACH BLVD (N)	PCC	E	2	675	28	19,039	6/19/24	58	18	18	64	New Construction - Initial	1/1/80
3270	1	KEMP AVE (N)	WILMINGTON AVE	CRESSEY ST (W)	AC	E	2	644	36	20,035	6/18/24	58	47	53	0	Surface Treatment-Cape Seal	1/19/16
3370	1	MATTHISEN CR	CYPRESS ST (W)	END	AC	E	2	230	33	8,730	4/12/24	58	72	24	4	New Construction - Initial	1/1/80
1250	4	ELIZABETH ST (E)	MURIAL AVE (S)	CITY LIMITS	AC	E	2	164	33	4,474	6/25/24	58	39	61	0	Surface Treatment - Slurry Seal	1/19/16
1340	2	FIG ST (W)	OLEANDER AVE (N)	EAST END	AC	E	2	181	28	5,310	6/4/24	58	97	0	3	New Construction - Initial	1/1/80
1360	1	FRAILEY AVE (S)	ALONDRA BLVD (E)	CITY LIMITS	AC	E	2	261	30	7,079	6/26/24	59	61	33	6	New Construction - Initial	1/1/80
1420	1	GOLDEN ST (E)	LONG BEACH BLVD (N)	SHORT AVE (N)	AC	E	2	897	36	22,593	6/19/24	59	67	30	3	New Construction - Initial	1/1/80
230	5	156TH ST (W)	DWIGHT AVE (S)	WILMINGTON AVE (N)	AC	E	2	1,324	36	46,595	4/5/24	59	53	47	0	New Construction - Initial	1/1/80
720	3	BOWEN AVE (N)	END (N)	END (S)	AC	E	2	264	24	7,493	4/18/24	59	61	39	0	New Construction - Initial	1/1/80
10	1	127TH PL (W)	DALHART AVE (N)	GRANDEE AVE (N)	AC	E	2	865	27	23,135	5/28/24	59	32	68	0	Surface Treatment - Cape Seal	1/19/16
3190	4	DWIGHT AVE (N)	ARBUTUS ST (W)	SCHOOL ST (W)	AC	E	2	724	36	17,907	5/30/24	59	25	75	0	Surface Treatment - Slurry Seal	1/19/16
1340	1	FIG ST (W)	OLEANDER AVE (N)	WEST END	AC	E	2	422	28	8,727	6/4/24	59	100	0	0	New Construction - Initial	1/1/80
2490	4	SAN VINCENTE ST	CITY LIMITS w/o ATLANTIC	ATLANTIC AVE (S)	AC	E	2	100	39	3,714	6/26/24	60	40	60	0	New Construction - Initial	1/1/80
1490	1	GUNLOCK AV (S)	KEMP AVE (S)	CALDWELL ST (W)	AC	E	2	1,369	36	36,233	4/12/24	60	13	86	1	New Construction - Initial	1/1/80
2190	6	PAULSEN AVE (N)	POPLAR ST (W)	ARBUTUS ST (W)	AC	E	2	260	26	6,780	2/29/24	60	37	63	0	New Construction - Initial	1/1/80
40	2	130TH ST (W)	COMPTON AVE (N)	GRANDEE AVE (N)	AAC	E	2	950	36	32,735	5/29/24	60	7	71	22	Overlay - AC Structural	7/14/20
190	3	152ND ST (W)	NESTOR AVE (S)	TAJAUTA AVE (S)	AC	E	2	803	36	25,231	6/3/24	60	42	37	21	New Construction - Initial	1/1/80
3080	1	WINONA AVE	ACACIA AVE (N)	WILLOWBROOK AVE (N)	AC	E	2	723	40	26,513	6/4/24	60	30	70	0	New Construction - Initial	1/1/80
40	3	130TH ST (W)	GRANDEE AVE (N)	WILLMINGTON AVE (N)	AAC	E	2	1,213	36	41,477	5/29/24	60	3	97	0	Overlay - AC Structural	7/14/20
2150	2	PALMER ST (W)	NESTOR AVE (N)	TAJAUTA AVE (N)	AC	E	2	723	27	18,895	6/5/24	60	64	36	0	New Construction - Initial	1/1/80
2610	2	SLOAN AVE	ALONDRA BLVD (E)	CYPRESS ST (E)	AC	E	2	710	27	18,256	6/3/24	60	64	22	14	New Construction - Initial	1/1/80
50	5	131TH ST (W)	WILMINGTON AVE (N)	END	AAC	E	2	913	26	24,239	5/29/24	60	23	58	19	Overlay - AC Structural	1/18/11
1420	2	GOLDEN ST (E)	SHORT AVE (N)	ALHAMBRA AVE	AC	E	2	860	36	23,211	6/19/24	60	70	29	1	New Construction - Initial	1/1/80
2160	2	PANNES AVE (N)	ROSECRANS AVE (E)	QUEENSDALE ST (E)	AC	E	2	592	36	19,745	4/17/24	60	44	56	0	New Construction - Initial	1/1/80
2360	4	RAYMOND ST	WHITEMARSH AVE (S)	WILLMINGTON AVE (S)	AC	E	2	135	36	3,708	4/12/24	60	25	55	20	New Construction - Initial	1/1/80
2120	1	PALM CIR (W)	SHERER PL (S)	CITY LIMITS	AC	E	2	144	33	6,584	6/3/24	60	61	39	0	New Construction - Initial	1/1/80
940	5	CENTRAL AVE FRONTAGE	154TH ST	CDS (N)	AC	E	2	710	26	19,365	4/5/24	60	51	49	0	New Construction - Initial	1/1/80
3240	1	INDIGO ST (W)	WILLOWBROOK AVE (S)	ACACIA AVE (S)	AC	E	2	708	36	21,440	6/5/24	60	50	50	0	New Construction - Initial	1/1/80
2820	4	TUCKER ST	SANTA FE AVE (N)	VAN NESS AVE (N)	AC	E	2	735	30	19,397	6/17/24	60	85	13	2	New Construction - Initial	1/1/80

BranchID	Sec ID	Name	From	To	Surface Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
520	2	ARLINGTON ST (E)	SHORT AVE (N)	LONG BEACH BLVD (N)	AC	E	2	816	36	21,097	6/19/24	61	61	28	11	Surface Treatment - Slurry Seal	1/19/16
1820	2	MAHALO PL (W)	MAHALO PL (S)	END (E)	AC	E	2	464	32	22,942	6/11/24	61	82	18	0	New Construction - Initial	1/1/80
660	4	BARRON AVE (S)	CYPRESS ST (W)	COCOA ST (W)	AC	E	2	306	33	11,596	6/3/24	61	60	40	0	Surface Treatment-Cape Seal	1/19/16
2610	4	SLOAN AVE	MYRRH ST (E)	COMPTON BLVD (E)	AC	E	2	1,340	32	36,910	6/3/24	61	71	18	11	New Construction - Initial	1/1/80
1010	1	COCOA AVE (W)	ARANABE AVE (S)	BARON AVE (S)	AC	E	2	499	36	17,137	6/3/24	61	45	55	0	Surface Treatment-Cape Seal	1/19/16
2820	2	TUCKER ST	ROSE AVE (N)	MCDIVITT AVE (N)	AC	E	2	520	28	14,145	6/17/24	61	87	13	0	New Construction - Initial	1/1/80
1120	7	CULVER AVE (N)	SCHOOL ST (W)	COMPTON BLVD (W)	AC	E	2	578	36	15,414	2/29/24	61	56	36	8	New Construction - Initial	1/1/80
3180	5	CYPRESS ST (W)	ACACIA AVE (S)	WILLOWBROOK AVE (S)	AC	E	2	646	36	21,375	6/5/24	61	32	65	3	New Construction - Initial	1/1/80
500	5	ARANBE AVE	ELM ST (W)	ROSECRANS AVE (W)	AC	E	2	930	34	26,630	6/17/24	61	75	16	9	New Construction - Initial	1/1/80
2830	4	VAN NESS AVE	TUCKER ST (E)	POPPY AVE (E)	AC	E	2	362	29	9,249	6/17/24	61	65	6	29	New Construction - Initial	1/1/80
2460	3	SAN LUIS ST	END (W)	HARRIS AVE	AC	E	2	318	32	8,643	6/4/24	61	35	50	15	Complete Reconstruction - AC	3/31/20
480	4	ANZAC AVE (N)	CYPRESS ST (W)	END (N)	AC	E	2	211	39	8,092	4/12/24	61	73	26	1	New Construction - Initial	1/1/80
660	2	BARRON AVE (S)	ALMOND ST (W)	LAUREL ST (W)	AC	E	2	445	36	12,608	6/5/24	62	5	78	17	Surface Treatment - Slurry Seal	1/19/16
1120	2	CULVER AVE (N)	WINONA ST (W)	DOUGLAS ST (W)	AC	E	2	857	36	31,444	6/4/24	62	35	65	0	New Construction - Initial	1/1/80
90	4	134TH ST (W)	COMPTON AVE (N)	GRANDEE AVE (N)	AC	E	2	956	36	24,246	5/29/24	62	9	66	25	New Construction - Initial	1/1/80
860	1	CARLIN AVE (E)	MCMILLAN ST (E)	CITY LIMITS	AC	E	2	547	36	9,246	6/26/24	62	23	75	2	Surface Treatment - Slurry Seal	1/16/16
2830	3	VAN NESS AVE	PECK ST (E)	TUCKER ST (E)	AC	E	2	422	28	11,735	6/17/24	62	70	22	8	New Construction - Initial	1/1/80
970	4	CLAUDE ST (W)	END (W)	WILLOWBROOK AVE (S)	AAC	E	2	1,100	36	28,798	6/12/24	62	4	65	31	Overlay - AC Structural	7/14/20
1940	5	MCMILLAN ST	WALDORF DR (N)	COOKACRE AVE (S)	AC	E	1	879	17	18,174	4/17/24	62	9	91	0	New Construction - Initial	1/1/80
1450	1	GRAPE AVE (N)	131ST ST (W)	NORD ST (W)	AAC	E	2	817	36	21,920	6/18/24	62	24	62	14	Overlay - AC Structural	1/18/11
2390	1	ROSE AVE	COMPTON BLVD (E)	PALMER ST (E)	AC	E	2	845	27	18,121	6/10/24	62	35	39	26	New Construction - Initial	1/1/80
2490	3	SAN VINCENTE ST	HOLLY AVE (N)	HARRIS AVE	AC	E	2	971	28	12,385	6/4/24	62	47	51	2	Complete Reconstruction - AC	3/31/20
2300	2	PLUM ST	WILMINGTON AVE (N)	PAULSEN AVE (N)	AC	E	2	567	28	13,948	6/18/24	63	55	30	15	New Construction - Initial	1/1/80
2830	2	VAN NESS AVE	ROSECRANS AVE (E)	PECK ST (E)	AC	E	2	840	28	22,315	6/25/24	63	52	48	0	New Construction - Initial	1/1/80
1450	5	GRAPE AVE (N)	CYPRESS ST (W)	END (N)	AC	E	2	150	36	6,380	4/12/24	63	86	0	14	New Construction - Initial	1/1/80
310	1	ADANA ST (E)	BUTLER AVE (S)	STONEACRE AVE (S)	AAC	E	2	520	36	13,687	6/18/24	63	22	78	0	Slurry Seal	5/1/16
2350	1	QUEENSDALE ST	BULLIS RD (N)	BRADFIELD AVE (N)	AAC	E	2	745	29	20,437	4/17/24	63	33	67	0	Surface Treatment - Slurry Seal	1/16/16
1100	4	CRANE AVE (N)	ALONDRA BLVD (E)	MYRRH ST (E)	AAC	E	2	1,363	27	35,593	6/3/24	63	73	26	1	Overlay - AC Structural	6/11/13
2220	1	PEAR ST	END	OLEANDER AVE (N)	AC	E	2	991	26	26,643	6/4/24	63	74	26	0	New Construction - Initial	1/1/80
760	2	BRAZIL ST (W)	TAJAUTA AVE (N)	MAIE AVE (N)	AC	E	2	740	36	21,112	6/5/24	63	55	45	0	New Construction - Initial	1/1/80
2790	2	TEMPLE AVE	SCHINNER ST (E)	CALDWELL ST (E)	AC	E	2	445	28	11,778	6/25/24	63	26	74	0	Slurry Seal	1/1/17
120	9	137TH ST (W)	GRAPE AVE (N)	PAULSEN AVE (N)	AC	E	2	246	36	6,681	6/18/24	63	5	95	0	New Construction - Initial	1/1/80
3230	2	HOLLY AVE (S)	MYRRH ST (E)	ALONDRA BLVD (E)	AC	E	2	1,337	36	35,466	4/18/24	63	17	83	0	New Construction - Initial	1/1/80
190	2	152ND ST (W)	CENTRAL AVE (S)	NESTOR AVE (S)	AC	E	2	793	36	23,841	6/3/24	63	51	34	15	New Construction - Initial	1/1/80
500	4	ARANBE AVE	PALMER ST (W)	ELM ST (W)	AC	E	2	813	26	20,375	6/17/24	63	63	0	37	New Construction - Initial	1/1/80
2650	8	SPRUCE ST	WILMINGTON AVE (N)	MATTHISEN AVE (N)	AC	E	2	1,110	33	33,658	6/17/24	64	89	2	9	New Construction - Initial	1/1/80
2320	6	POINSETTIA AVE (S)	MYRRH ST (E)	LAUREL ST (E)	AC	E	2	655	32	18,970	6/3/24	64	75	19	6	New Construction - Initial	1/1/80
1890	1	MARCELLE ST (E)	END (W)	POINTSETTIA AVE (S)	AC	E	2	454	32	15,614	3/7/24	64	82	0	18	New Construction - Initial	1/1/80
3400	1	PALM ST (W)	END	PAULSEN AVE (S)	AC	E	2	450	33	15,480	6/3/24	64	67	33	0	New Construction - Initial	1/1/80
2790	1	TEMPLE AVE	GREENLEAF BLVD (E)	SCHINNER ST (E)	AC	E	2	890	28	21,696	6/25/24	64	24	76	0	Slurry Seal	1/1/17
500	3	ARANBE AVE	COMPTON BLVD (W)	PALMER ST (W)	AC	E	2	915	26	22,104	6/17/24	64	32	33	35	New Construction - Initial	1/1/80
1100	2	CRANE AVE (N)	ELM ST (E)	PALMER ST (E)	AAC	E	1	894	17	14,580	6/25/24	64	47	50	3	Overlay - AC Structural	6/11/13
3180	4	CYPRESS ST (W)	PAULSEN CIR	CENTER AVE (S)	AC	E	2	531	36	16,784	4/12/24	64	64	33	3	New Construction - Initial	1/1/80
2360	8	RAYMOND ST	ACACIA AVE (S)	WILLOWBROOK AVE (S)	AC	E	2	620	40	23,329	6/12/24	65	94	0	6	New Construction - Initial	1/1/80
1110	6	CRESSEY ST (W)	MATTHISEN AVE (N)	ARANBE AVE (N)	AC	E	2	611	36	15,134	6/18/24	65	80	19	1	New Construction - Initial	1/1/80
2080	6	OLEANDER AVE (S)	CALDWELL ST (W)	BENNETT ST (W)	AC	E	2	659	36	19,613	6/12/24	65	20	54	26	New Construction - Initial	1/1/80
2360	3	RAYMOND ST	DWIGHT AVE (S)	WHITEMARSH AVE (S)	AC	E	2	1,090	36	35,778	4/12/24	65	35	65	0	New Construction - Initial	1/1/80
180	3	151ST ST (W)	TAJAUTA AVE (S)	MAIE AVE (N)	AC	E	2	664	36	20,727	6/3/24	65	25	63	12	Complete Reconstruction - AC	3/31/20
2080	2	OLEANDER AVE (S)	ALMOND ST (W)	MYRRH ST (W)	AC	E	2	698	33	24,479	6/4/24	65	62	23	15	New Construction - Initial	1/1/80
3100	1	ARBUTUS ST (E)	TAMARIND AVE (N)	ALAMEDA ST (N)	AAC	E	2	421	36	9,272	6/4/24	65	46	51	3	Overlay - AC Structural	1/18/11
2320	3	POINSETTIA AVE (S)	MARCELLA ST (E)	ALONDRA BLVD (E)	AC	E	2	810	35	25,335	3/7/24	65	30	40	30	New Construction - Initial	1/1/80
2920	6	WARD AVE	DIANE DR (E)	ORCHARD ST (E)	AC	E	2	565	30	16,010	4/17/24	65	37	63	0	New Construction - Initial	1/1/80
680	1	BENNETT ST (E)	WILLOWBROOK AVE (S)	ALAMEDA ST (S)	AC	E	2	1,466	36	37,416	6/12/24	65	46	52	2	New Construction - Initial	1/1/80
1110	7	CRESSEY ST (W)	ARANBE AVE (N)	END (E)	AC	E	2	903	36	22,439	6/18/24	65	83	17	0	New Construction - Initial	1/1/80
2390	5	ROSE AVE	TUCKER ST (E)	OAKS ST (E)	AC	E	2	820	27	21,715	6/10/24	65	71	19	10	New Construction - Initial	1/1/80
910	4	CEDAR ST (W)	OLEANDER AVE (N)	ACACIA AVE (N)	AC	E	2	841	36	20,832	2/29/24	65	69	29	2	New Construction - Initial	1/1/80
1100	1	CRANE AVE (N)	ROSECRANS AVE (E)	ELM ST (E)	AAC	E	1	968	17	14,963	6/25/24	65	33	67	0	Overlay - AC Structural	6/11/13
2010	10	MYRRH ST (E)	TAMARIND AVE (S)	ALAMEDA ST (S)	AC	E	2	545	36	20,255	6/4/24	65	33	67	0	New Construction - Initial	1/1/80
220	1	155TH ST (W)	CENTRAL AVE (S)	NESTOR AVE (N)	AC	E	2	676	36	15,515	6/3/24	65	39	34	27	New Construction - Initial	1/1/80
3150	4	CHESTER AVE (N)	ROSECRANS AVE (E)	TUCKER ST (E)	AC	E	2	1,310	36	52,172	6/17/24	65	57	16	27	New Construction - Initial	1/1/80

BranchID	Sec ID	Name	From	To	Surface Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
2490	1	SAN VINCENTE ST	END (W)	BRADFIELD AVE (N)	AC	E	2	445	28	14,013	6/4/24	65	45	54	1	Surface Treatment-Cape Seal	1/16/16
3180	2	CYPRESS ST (W)	APRILIA AVE (S)	KEENE AVE (S)	AC	E	2	891	36	25,518	6/3/24	65	21	79	0	Complete Reconstruction - AC	5/1/15
2810	14	TICHENOR ST	POINSETTIA AVE (S)	TEMPLE AVE (S)	AC	E	2	392	28	10,854	6/25/24	65	70	0	30	New Construction - Initial	1/1/80
510	4	ARBUTUS ST (W)	END	MATTHISEN AVE (N)	AC	E	2	1,424	36	37,219	2/29/24	66	30	65	5	Slurry Seal	1/1/15
2070	1	OLEANDER AVE (N)	COMPTON BLVD (W)	SCHOOL ST (W)	AC	E	2	618	28	14,780	6/4/24	66	73	27	0	New Construction - Initial	1/1/80
360	2	ALBERTSON AVE (S)	ARBUTUS ST (W)	PALMER ST (W)	AAC	E	2	517	36	12,779	6/5/24	66	11	89	0	Overlay - AC Structural	7/14/20
2190	5	PAULSEN AVE (N)	CHERRY ST (W)	SPRUCE ST (W)	AC	E	2	492	28	10,553	6/18/24	66	69	31	0	New Construction - Initial	1/1/80
1920	1	MCDIVITT AVE (N)	ROSECRANS AVE (E)	PECK ST (E)	AC	E	2	657	28	16,794	6/25/24	66	69	26	5	New Construction - Initial	1/1/80
1990	1	MULBERRY ST (N)	ROSECRANS AVE (E)	END (N)	AC	E	2	629	36	19,690	6/4/24	66	93	0	7	New Construction - Initial	1/1/80
2140	2	PALMER ST (E)	END (W)	BRADFIELD (N)	AC	E	2	460	30	13,852	6/4/24	66	42	58	0	New Construction - Initial	1/1/80
2160	3	PANNES AVE (N)	QUEENSDALE ST (E)	TUCKER ST (E)	AC	E	2	507	36	17,912	4/17/24	66	48	52	0	New Construction - Initial	1/1/80
690	1	BENTLEY AVE (S)	BENNET ST (E)	GREENLEAF BLVD (E)	AC	E	2	537	36	13,275	6/12/24	66	31	69	0	New Construction - Initial	1/1/80
1600	1	INDIGO ST (E)	WILLOWBROOK AVE (S)	ALAMEDA ST (S)	AC	E	2	1,226	36	40,543	6/5/24	66	76	24	0	New Construction - Initial	1/1/80
970	1	CLAUDE ST (W)	CLYMAR AVE (S)	APRILIA AVE (S)	AC	E	2	776	36	23,684	4/16/24	66	39	58	3	New Construction - Initial	1/1/80
1450	3	GRAPE AVE (N)	STOCKWELL ST (W)	137TH ST (W)	AAC	E	2	639	36	17,324	6/18/24	66	31	69	0	Overlay - AC Structural	1/18/11
2610	3	SLOAN AVE	CYPRESS ST (E)	MYRRH ST (E)	AC	E	2	643	30	18,082	6/3/24	66	84	11	5	New Construction - Initial	1/1/80
2190	3	PAULSEN AVE (N)	STOCKWELL ST (W)	138TH ST (W)	AAC	E	2	888	28	26,435	6/18/24	66	16	84	0	Overlay - AC Structural	1/18/11
1210	1	DOUGLAS AVE (W)	ACACIA AVE (N)	WILLOWBROOK AVE (N)	AC	E	2	724	36	25,910	6/4/24	66	37	63	0	New Construction - Initial	1/1/80
1520	1	HARRIS AVE	GREENLEAF BLVD (E)	CITY LIMITS (N)	AC	E	2	80	29	2,334	6/18/24	67	32	59	9	New Construction - Initial	1/1/80
230	4	156TH ST (W)	TAJAUTA AVE (S)	DWIGHT AVE (S)	AC	E	2	1,320	36	47,812	4/5/24	67	47	46	7	New Construction - Initial	1/1/80
2330	7	POPLAR ST	WILLMINGTON AVE (N)	MATTHISEN AVE (N)	AC	E	2	1,100	36	33,930	2/29/24	67	64	36	0	New Construction - Initial	1/1/80
3330	1	MATTHISEN AVE (S)	COMPTON BLVD (W)	ALMOND ST (W)	AC	E	2	887	30	25,147	6/5/24	67	18	81	1	Surface Treatment - Slurry Seal	1/19/16
2820	3	TUCKER ST	MCDIVITT AVE (N)	SANTA FE AVE (N)	AC	E	2	530	28	12,573	6/17/24	67	62	38	0	New Construction - Initial	1/1/80
3180	3	CYPRESS ST (W)	END (W)	PAULSEN CIR	AC	E	2	586	36	21,892	4/12/24	67	98	0	2	New Construction - Initial	1/1/80
3190	1	DWIGHT AVE (N)	CRESSEY ST (W)	ROSECRANS AVE (W)	AC	E	2	319	36	8,857	6/11/24	67	48	52	0	Surface Treatment-Cape Seal	1/19/16
1460	1	GREENLEAF DR	GREENLEAF BLVD (W)	WILMINGTON AVE (S)	AC	E	2	1,305	36	47,273	6/11/24	67	53	47	0	Surface Treatment - Slurry Seal	1/19/16
210	5	154TH ST (W)	CENTRAL AVE (S)	NESTOR AVE (S)	AC	E	2	717	36	21,742	6/3/24	67	58	17	25	New Construction - Initial	1/1/80
1890	2	MARCELLE ST (E)	POINTSETTIA AVE (S)	TEMPLE AVE (S)	AC	E	2	516	32	17,756	3/7/24	67	88	0	12	New Construction - Initial	1/1/80
2540	9	SCHOOL ST	ACACIA AVE (N)	WILLOWBROODK AVE (N)	AC	E	2	590	28	16,757	2/29/24	67	97	0	3	New Construction - Initial	1/1/80
2220	2	PEAR ST	OLEANDER AVE (N)	ACACIA AVE (N)	AC	E	2	306	26	8,518	6/4/24	67	65	21	14	New Construction - Initial	1/1/80
2650	9	SPRUCE ST	MATTHISEN AVE (N)	OLEANDER AVE (N)	AC	E	2	1,275	28	32,458	6/17/24	67	68	21	11	New Construction - Initial	1/1/80
1690	1	KNOPF ST (W)	PAULSEN AVE (N)	END (E)	AC	E	2	76	36	1,165	6/18/24	67	39	61	0	New Construction - Initial	1/1/80
2240	1	PECK ST	END	MCDIVITT AVE (N)	AC	E	2	647	28	17,460	6/25/24	67	71	28	1	New Construction - Initial	1/1/80
1100	3	CRANE AVE (N)	PALMER ST (E)	COMPTON BLVD (E)	AAC	E	1	842	17	13,846	6/25/24	67	59	13	28	Overlay - AC Structural	6/11/13
200	3	153RD ST (W)	NESTOR AVE (S)	TAJAUTA AVE (S)	AC	E	2	800	36	25,031	6/3/24	67	47	35	18	New Construction - Initial	1/1/80
2240	2	PECK ST	MCDIVITT AVE (N)	CHESTER AVE (N)	AC	E	2	794	28	19,772	6/25/24	67	77	23	0	New Construction - Initial	1/1/80
400	1	ALMOND ST (W)	DWIGHT AVE (S)	DWIGHT AVE (N)	AC	E	2	287	36	9,321	5/30/24	67	39	61	0	New Construction - Initial	1/1/80
3410	3	PANNES AVE (S)	MYRRH ST (E)	CYPRESS ST (E)	AC	E	2	658	32	17,119	4/18/24	67	73	27	0	New Construction - Initial	1/1/80
2330	3	POPLAR ST	TAJAUTA AVE (N)	CLIVEDEN AVE (N)	AAC	E	2	550	32	16,925	5/30/24	68	2	86	12	Overlay - AC Structural	7/14/20
400	5	ALMOND ST (W)	BARRON ST (S)	OLEANDER AVE (N)	AC	E	2	691	36	24,185	6/5/24	68	72	27	1	New Construction - Initial	1/1/80
1170	1	DEL MAR CT	CHESTER AVE (N)	MAYO AVE (N)	AC	E	2	656	36	13,732	6/26/24	68	44	42	14	Surface Treatment - Slurry Seal	1/19/16
610	2	BAHAMA AVE (N)	134TH ST (W)	LITTLETON ST	AC	E	2	344	36	9,114	5/28/24	68	28	46	26	New Construction - Initial	1/1/80
2350	2	QUEENSDALE ST	BRADFIELD AVE (N)	PANNES AVE (N)	AAC	E	2	530	29	13,957	4/17/24	68	28	72	0	Surface Treatment - Slurry Seal	1/19/16
3030	8	WILLOWBROOK AVE (S) NB	END (S)	ELM ST (E)	AC	E	2	557	35	21,204	6/4/24	68	29	71	0	New Construction - Initial	1/1/80
3120	1	BURRIS AVE (S)	COMPTON BLVD (E)	LAUREL ST (E)	AC	E	2	679	36	16,740	6/3/24	68	74	26	0	Surface Treatment - Slurry Seal	1/19/16
480	2	ANZAC AVE (N)	NORD ST (W)	STOCKWELL ST (W)	AAC	E	2	742	36	20,245	6/18/24	68	32	43	25	Overlay - AC Structural	1/18/11
1120	5	CULVER AVE (N)	END (N)	POPLAR ST (W)	AC	E	2	525	36	14,357	2/29/24	68	50	35	15	New Construction - Initial	1/1/80
2300	5	PLUM ST	ARANBE AVE (N)	OLEANDER AVE (N)	AC	E	2	685	28	17,263	6/18/24	68	87	11	2	New Construction - Initial	1/1/80
3400	3	PALM ST (W)	BARRON ST (S)	OLEANDER AVE (S)	AC	E	2	697	33	23,447	6/5/24	68	74	13	13	New Construction - Initial	1/1/80
2370	6	REEVE ST	TAMARIND AVE (S)	ALAMEDA ST (S)	AC	E	2	752	28	18,719	6/12/24	68	73	27	0	New Construction - Initial	1/1/80
1140	4	CYPRESS ST (E)	BURRIS AVE (S)	BULLIS RD (S)	AC	E	2	1,510	36	31,127	6/3/24	69	48	52	0	Cape Seal	1/1/15
1640	4	KAY ST (E)	BRADFIELD AVE (N)	PANNES AVE (N)	AAC	E	2	640	36	16,500	4/17/24	69	35	65	0	Overlay - AC Structural	1/18/11
1380	3	GIBSON ST (S)	CITY LIMITS	CITY LIMITS	AC	E	2	212	35	7,422	6/26/24	69	39	45	16	New Construction - Initial	1/1/80
300	12	ACACIA AVE	CEDAR ST (W)	ROSECRANS AVE (W)	AC	E	2	765	33	22,427	6/17/24	69	57	39	4	New Construction - Initial	1/1/80
820	1	BUTLER AVE (S)	CITY LIMITS	END	AC	E	2	175	36	7,625	6/18/24	69	90	0	10	New Construction - Initial	1/1/80
670	1	BELHAVEN AV	132ND ST (W)	KEENE AVE (N)	AC	E	2	933	36	24,779	5/28/24	69	39	31	30	New Construction - Initial	1/1/80
2550	1	SEQUOIA DR	VICTORIA ST (W)	END (N)	AC	E	2	450	40	14,290	6/11/24	69	98	0	2	New Construction - Initial	1/1/80
2820	1	TUCKER ST	END (W)	ROSE AVE (N)	AC	E	2	105	28	3,536	6/17/24	69	100	0	0	New Construction - Initial	1/1/80
610	1	BAHAMA AVE (N)	132ND ST (N)	134TH ST (N)	AC	E	2	698	36	16,634	5/28/24	69	23	46	31	New Construction - Initial	1/1/80
1920	2	MCDIVITT AVE (N)	PECK ST (E)	TUCKER ST (E)	AC	E	2	655	28	17,105	6/25/24	69	67	32	1	New Construction - Initial	1/1/80

BranchID	Sec ID	Name	From	To	Surface Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
950	6	CHERRY ST (W)	ARANBE AVE (N)	OLEANDER AVE (N)	AC	E	2	688	36	17,420	6/18/24	69	64	34	2	New Construction - Initial	1/1/80
2010	9	MYRRH ST (E)	PACIFIC ELECTRIC RR	TAMARIND AVE (S)	AC	E	2	652	36	24,228	6/4/24	69	32	60	8	New Construction - Initial	1/1/80
2070	5	OLEANDER AVE (N)	ROSECRANS AVE (W)	CRESSEY ST (W)	AC	E	2	726	28	18,121	6/4/24	69	88	12	0	New Construction - Initial	1/1/80
2330	8	POPLAR ST	MATTHISEN AVE (N)	ARANBE AVE (N)	AC	E	2	610	31	15,280	2/29/24	69	58	39	3	New Construction - Initial	1/1/80
2210	1	PEACH ST (W)	PAULSEN AVE (N)	MATTHISEN AVE (N)	AC	E	2	580	28	15,046	6/18/24	69	87	2	11	New Construction - Initial	1/1/80
2070	2	OLEANDER AVE (N)	SCHOOL ST (W)	ARBUTUS ST (W)	AC	E	2	579	28	15,070	6/4/24	69	100	0	0	New Construction - Initial	1/1/80
2320	2	POINSETTIA AVE (S)	CALDWELL ST (E)	MARCELLA ST (E)	AC	E	2	530	35	16,610	6/25/24	69	88	12	0	New Construction - Initial	1/1/80
1070	1	COOKACRE AVE (S)	MCMILLAN ST (E)	CITY LIMITS	AC	E	2	87	36	2,977	6/26/24	70	50	18	32	New Construction - Initial	1/1/80
1640	1	KAY ST (E)	CHESTER AVE (N)	VAN NESS AVE (N)	AC	E	2	522	36	14,147	6/17/24	70	59	0	41	New Construction - Initial	1/1/80
2800	1	THORSON AVE	GREENLEAF BLVD	CITY LIMITS (N)	AC	E	2	80	42	2,797	6/18/24	70	25	75	0	New Construction - Initial	1/1/80
2590	1	SIERRA DR	VICTORIA ST (E)	END (N)	AC	I	2	450	55	14,972	6/11/24	70	88	0	12	New Construction - Initial	1/1/80
320	2	ALAMEDA ST NB	AUTO DR (S)	GREENLEAF BLVD (E)	AC	I	2	1,395	42	49,826	6/24/24	70	60	30	10	New Construction - Initial	1/1/80
590	1	AUTO CENTER DR	AUTO DR (S)	END (S)	AC	I	2	395	59	21,746	6/24/24	70	70	30	0	New Construction - Initial	1/1/80
190	5	152ND ST (W)	MAIE AVE (N)	DWIGHT AVE (N)	AC	E	2	665	36	20,229	6/3/24	70	28	72	0	Complete Reconstruction - AC	3/31/20
2210	2	PEACH ST (W)	MATTHISEN AVE (N)	ARANBE AVE (N)	AC	E	2	612	28	15,379	6/18/24	70	96	4	0	New Construction - Initial	1/1/80
2720	2	TAJAUTA AVE	156TH ST (W)	END (S)	AC	E	2	80	36	2,457	6/3/24	70	100	0	0	New Construction - Initial	1/1/80
1350	1	FLOWER ST (S)	LAUREL ST (E)	NORTH END	AC	E	2	316	30	9,363	6/10/24	70	37	36	27	New Construction - Initial	1/1/80
3200	3	ELM ST (W)	MATTHISEN AVE (N)	OLEANDER AVE (N)	AC	E	2	1,303	25	33,635	2/29/24	70	60	32	8	Surface Treatment - Slurry Seal	1/19/16
3360	2	NESTOR AVE (S)	152ND ST (W)	155TH ST (W)	AC	E	2	776	32	22,114	6/3/24	70	79	21	0	New Construction - Initial	1/1/80
2300	4	PLUM ST	MATTHISEN AVE (N)	ARANBE AVE (S)	AC	E	2	614	28	15,498	6/18/24	70	97	0	3	New Construction - Initial	1/1/80
2810	1	TICHENOR ST	MCKINLEY AVE (S)	WADSWORTH AVE (S)	AC	E	2	1,040	32	29,836	4/16/24	71	71	29	0	New Construction - Initial	1/1/80
1110	5	CRESSEY ST (W)	PAULSEN AVE (N)	MATTHISEN AVE (N)	AC	E	2	570	36	13,864	6/18/24	71	91	7	2	New Construction - Initial	1/1/80
3420	1	PAULSEN AVE (S)	PALM ST (W)	ALMOND ST (W)	AC	E	2	577	28	17,652	6/3/24	71	99	0	1	New Construction - Initial	1/1/80
3410	4	PANNES AVE (S)	CYPRESS ST (E)	CITY LIMITS	AC	E	2	849	32	20,877	4/18/24	71	54	45	1	New Construction - Initial	1/1/80
1110	4	CRESSEY ST (W)	WILMINGTON AVE (N)	PAULSEN AVE (N)	AC	E	2	582	36	14,053	6/18/24	71	74	6	20	New Construction - Initial	1/1/80
1880	3	MAPLE ST (W)	ARANBE AVE (N)	END (E)	AC	E	2	899	26	22,894	6/17/24	71	83	14	3	New Construction - Initial	1/1/80
1910	4	MAYO AVE (S)	ALONDRA BLVD (E)	CYPRESS ST(E)	AC	E	2	716	28	18,246	6/3/24	71	51	48	1	New Construction - Initial	1/1/80
910	3	CEDAR ST (W)	S ARNADE AVE (S)	OLEANDER AVE (N)	AC	E	2	692	36	17,134	2/29/24	71	98	0	2	New Construction - Initial	1/1/80
2770	2	TAPER AVE	156TH ST (W)	154TH ST (W)	AAC	E	2	440	30	11,978	6/3/24	71	2	98	0	Overlay - AC Structural	7/14/20
300	7	ACACIA AVE	CLAUDE ST (W)	ALONDRA BLVD (W)	AAC	E	2	913	36	32,246	6/12/24	71	78	22	0	Overlay - AC Structural	7/14/20
3220	1	GLENCOE ST (W)	END (W)	WILLOWBROOK AVE (S)	AC	E	2	312	36	9,171	6/12/24	71	45	53	2	New Construction - Initial	1/1/80
2240	3	PECK ST	CHESTER AVE (N)	VAN NESS AVE (N)	AC	E	2	521	30	13,589	6/17/24	72	90	6	4	New Construction - Initial	1/1/80
3290	7	LAUREL ST (W)	KEMP AVE (S)	DWIGHT AVE (S)	AAC	E	2	1,295	32	43,762	5/30/24	72	28	64	8	Overlay - AC Structural	6/2/10
2650	10	SPRUCE ST	OLEANDER AVE (N)	END (E)	AC	E	2	195	28	5,174	6/17/24	72	96	4	0	New Construction - Initial	1/1/80
500	6	ARANBE AVE	ROSECRANS AVE (W)	CRESSEY ST (W)	AC	E	2	722	29	17,162	6/18/24	72	49	48	3	New Construction - Initial	1/1/80
950	3	CHERRY ST (W)	WILMINGTON AVE (N)	PAULSEN AVE (N)	AC	E	2	574	36	13,387	6/18/24	72	72	13	15	New Construction - Initial	1/1/80
2810	13	TICHENOR ST	END (W)	POINSETTIA AVE (S)	AC	E	2	452	28	13,690	6/25/24	72	59	0	41	New Construction - Initial	1/1/80
1380	2	GIBSON ST (S)	ROSECRANS AVE (E)	CITY LIMITS	AC	E	2	312	35	8,156	6/26/24	72	59	41	0	New Construction - Initial	1/1/80
3360	1	NESTOR AVE (S)	COMPTON BLVD (W)	152ND ST (W)	AC	E	2	562	32	15,494	6/3/24	72	67	33	0	New Construction - Initial	1/1/80
3290	3	LAUREL ST (W)	BARRON AVE (S)	MATTHISEN AVE (S)	AC	E	2	450	32	12,998	6/5/24	72	26	16	58	New Construction - Initial	1/1/80
2820	6	TUCKER ST	BULLIS RD (N)	BRADFORD AVE (N)	AC	E	2	995	29	27,782	4/17/24	72	40	60	0	New Construction - Initial	1/1/80
1450	2	GRAPE AVE (N)	NORD ST (W)	STOCKWELL ST (W)	AAC	E	2	738	36	20,019	6/18/24	72	31	49	20	Overlay - AC Structural	1/18/11
2930	3	WASHINGTON AVE	ALONDRA BLVD (E)	CITY LIMITS (N)	AC	E	2	145	28	3,187	6/26/24	72	46	54	0	New Construction - Initial	1/1/80
3290	1	LAUREL ST (W)	END (W)	OLEANDER AVE (S)	AC	E	2	588	32	22,724	6/5/24	72	60	40	0	New Construction - Initial	1/1/80
1800	1	MAGNOLIA CT	SCHOOL ST (W)	PAULSEN AVE (N)	AC	E	2	628	26	17,595	2/29/24	73	67	33	0	New Construction - Initial	1/1/80
200	2	153RD ST (W)	CENTRAL AVE (S)	NESTOR AVE (S)	AC	E	2	756	36	23,036	6/3/24	73	54	12	34	New Construction - Initial	1/1/80
3120	2	BURRIS AVE (S)	LAUREL ST (E)	MYRRH ST (E)	AC	E	2	671	36	18,246	6/3/24	73	71	27	2	Surface Treatment - Slurry Seal	1/19/16
1000	2	CLYMAR AVE (S)	156TH ST (W)	CYPRESS ST (W)	AAC	E	2	1,483	36	41,593	4/5/24	73	19	39	42	Overlay - AC Structural	6/21/16
2470	1	SAN MARCUS ST	END (W)	BRADFIELD AVE (N)	AC	E	2	450	29	13,648	6/4/24	73	45	54	1	New Construction - Initial	1/1/80
1830	1	MAHALO PL (S)	KONA DR	MAHALO PL (W)	AC	E	2	435	32	20,643	6/11/24	73	62	0	38	New Construction - Initial	1/1/80
1700	1	KONA DR (W)	CITY LIMITS	MAHALO PL (S)	AC	E	2	1,372	36	56,240	6/11/24	73	47	24	29	Surface Treatment-Cape Seal	1/19/16
2810	11	TICHENOR ST	WILLOWBROOK AVE (S)	TAMARIND AVE (S)	AC	E	2	595	28	15,647	6/12/24	73	100	0	0	New Construction - Initial	1/1/80
2150	8	PALMER ST (W)	WILMINGTON AVE (N)	MATTHISEN AVE (N)	AC	E	2	1,137	27	28,790	2/29/24	73	48	39	13	New Construction - Initial	1/1/80
2300	3	PLUM ST	PAULSEN AVE (N)	MATTHISEN AVE (N)	AC	E	2	567	28	14,050	6/18/24	73	96	4	0	New Construction - Initial	1/1/80
1120	1	CULVER AVE (N)	CITY LIMITS	WINONA ST (W)	AC	E	2	278	36	9,938	6/4/24	74	59	39	2	New Construction - Initial	1/1/80
2230	1	PEARL AVE (N)	COMPTON BLVD (E)	PALMER ST(E)	AC	E	2	786	28	21,437	6/25/24	74	57	23	20	New Construction - Initial	1/1/80
2540	8	SCHOOL ST	OLEANDER AVE (N)	ACACIA AVE (N)	AC	E	2	680	28	18,890	2/29/24	74	75	21	4	New Construction - Initial	1/1/80
2860	1	VISALIA LN	END (S)	ALONDRA BLVD (W)	AC	E	2	303	32	10,312	3/8/24	74	100	0	0	New Construction - Initial	1/1/80
880	1	CARSON PL (E)	TAMARIND AVE	ALAMEDA ST (N)	PCC	E	2	387	26	16,708	6/4/24	74	21	79	0	New Construction - Initial	1/1/80
1640	2	KAY ST (E)	VAN NESS AVE	LONG BEACH BLVD (N)	AC	E	2	1,579	36	41,511	6/17/24	74	63	17	20	New Construction - Initial	1/1/80

BranchID	Sec ID	Name	From	To	Surface Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
2360	7	RAYMOND ST	OLEANDER AVE (S)	ACACIA AVE (S)	AC	E	2	650	42	23,734	6/12/24	74	96	0	4	New Construction - Initial	1/1/80
2920	5	WARD AVE	MCMILLAN ST (E)	DIANE DR (E)	AC	E	2	540	30	6,393	4/17/24	74	19	0	81	New Construction - Initial	1/1/80
520	1	ARLINGTON ST (E)	ALHAMBRA AVE (N)	SHORT AVE (N)	AC	E	2	869	36	23,899	6/19/24	74	49	36	15	Surface Treatment - Slurry Seal	1/19/16
1120	6	CULVER AVE (N)	POPLAR ST (W)	SCHOOL ST (W)	AC	E	2	943	36	26,941	2/29/24	74	70	25	5	New Construction - Initial	1/1/80
1260	1	ELM ST (E)	WILLOWBROOK AVE (N)	TAMARIND AVE (N)	AC	E	2	694	25	17,001	6/4/24	74	75	25	0	New Construction - Initial	1/1/80
2330	10	POPLAR ST	OLEANDER AVE (N)	ACACIA AVE (N)	AC	E	2	820	27	21,929	2/29/24	74	58	36	6	New Construction - Initial	1/1/80
1650	1	KEENE AVE (N)	134TH ST (W)	132ND ST (W)	AC	E	2	976	36	25,797	5/28/24	74	33	36	31	New Construction - Initial	1/1/80
1750	2	LINSLEY ST (E)	CITY LIMITS	GIBSON AVE (S)	AC	E	2	105	24	2,850	3/7/24	74	58	42	0	New Construction - Initial	1/1/80
2080	7	OLEANDER AVE (S)	BENNETT ST (W)	GREENLEAF BLVD (W)	AC	E	2	515	36	15,003	6/12/24	74	31	23	46	New Construction - Initial	1/1/80
950	4	CHERRY ST (W)	PAULSEN AVE (N)	MATTHISEN AVE (N)	AC	E	2	564	36	14,096	6/18/24	75	88	10	2	New Construction - Initial	1/1/80
2920	3	WARD AVE	MYRRH ST (E)	LAUREL ST (E)	AC	E	2	650	28	17,034	4/18/24	75	8	89	3	New Construction - Initial	1/1/80
180	4	151ST ST (W)	MAIE AVE (N)	DWIGHTAVE (N)	AC	E	2	663	36	20,308	6/3/24	75	40	60	0	Complete Reconstruction - AC	3/31/20
1490	2	GUNLOCK AV (S)	CALDWELL ST (W)	DWIGHT AVE (S)	AAC	E	2	1,237	36	27,967	4/12/24	75	21	79	0	Overlay - AC Structural	4/6/20
1910	6	MAYO AVE (S)	MYRRH ST (E)	LARUEL ST (E)	AAC	E	2	670	28	17,765	6/3/24	75	22	78	0	Overlay - AC Structural	7/14/20
3000	8	WILLOW AVE	PECK ST (E)	TUCKER ST (E)	AC	E	2	659	30	17,764	6/25/24	75	57	23	20	New Construction - Initial	1/1/80
3470	1	MCKINLEY AVE (N)	ROSECRANS AVE (W)	139TH ST (W)	AC	I	2	1,125	40	38,756	5/28/24	75	12	71	17	Complete Reconstruction - AC	5/1/16
2540	6	SCHOOL ST	PAULSEN AVE (N)	ARANBE AVE (N)	AC	E	2	1,145	28	30,073	2/29/24	75	81	0	19	New Construction - Initial	1/1/80
2810	12	TICHENOR ST	TAMARIND AVE (S)	ALAMEDA ST (S)	AC	E	2	760	28	19,061	6/12/24	75	86	14	0	New Construction - Initial	1/1/80
3000	9	WILLOW AVE	TUCKER ST (E)	END (N)	AC	E	2	435	29	12,055	6/25/24	76	91	7	2	New Construction - Initial	1/1/80
3120	4	BURRIS AVE (S)	CYPRESS ST (E)	ALONDRA BLVD (E)	AC	E	2	716	36	18,558	6/3/24	76	83	15	2	Surface Treatment - Slurry Seal	1/19/16
90	5	134TH ST (W)	GRANDEE AVE (N)	WILMINGTON AVE (N)	AAC	E	2	1,208	36	31,203	5/29/24	76	3	97	0	Overlay - AC Structural	7/14/20
1520	5	HARRIS AVE	MYRRH ST (E)	LAUREL ST (E)	AC	E	2	673	30	17,024	4/18/24	76	26	74	0	Complete Reconstruction - AC	5/1/16
2290	1	PLAZA DR	GREENLEAF BLVD (E)	GATEWAY DR	AC	E	2	202	36	7,099	6/12/24	76	38	43	19	New Construction - Initial	1/1/80
3170	1	CORLETT AVE (N)	132ND ST (W)	LITTLETON ST	AC	E	2	1,163	36	32,087	5/28/24	76	43	30	27	New Construction - Initial	1/1/80
2040	1	NORTHWOOD AVE (S)	GREENLEAF BLVD (W)	166TH ST (W)	AC	E	2	612	27	18,955	4/12/24	76	100	0	0	Slurry Seal	5/1/16
2330	9	POPLAR ST	ARANBE AVE (N)	OLEANDER AVE (N)	AC	E	2	685	28	17,677	2/29/24	76	97	0	3	New Construction - Initial	1/1/80
2370	4	REEVE ST	ACACIA AVE (S)	WILLOWBROOK AVE (S)	AC	E	2	630	27	16,190	6/12/24	76	98	0	2	New Construction - Initial	1/1/80
3290	6	LAUREL ST (W)	WILMINGTON AVE (S)	KEMP AVE (S)	AAC	E	2	331	32	9,853	5/30/24	76	100	0	0	Overlay - AC Structural	6/2/10
2090	2	ORCHARD ST	BRADFIELD AVE (N)	PANNES AVE (N)	AC	E	2	791	36	26,355	4/17/24	76	3	97	0	New Construction - Initial	1/1/80
2540	5	SCHOOL ST	WILMINGTON AVE (N)	PAULSEN AVE (N)	AC	E	2	535	28	14,399	2/29/24	76	60	40	0	New Construction - Initial	1/1/80
300	14	ACACIA AVE	DOUGLAST ST (W)	WINONA AVE (W)	AC	E	2	850	40	30,906	6/4/24	76	52	48	0	New Construction - Initial	1/1/80
90	6	134TH ST (W)	BAHAMA AVE (N)	CENTRAL AVE (S)	AC	E	2	522	36	18,252	5/28/24	77	69	0	31	New Construction - Initial	1/1/80
2190	8	PAULSEN AVE (N)	ARBUTUS ST (W)	SCHOOL ST (W)	AC	E	2	556	26	14,150	2/29/24	77	38	46	16	New Construction - Initial	1/1/80
300	13	ACACIA AVE	ROSECRANS AVE (W)	DOUGLAS ST (W)	AC	E	2	525	40	17,239	6/4/24	77	54	46	0	New Construction - Initial	1/1/80
3090	1	129TH PL (W)	GRANDEE AVE (N)	END	AAC	E	2	544	27	15,129	5/29/24	77	9	91	0	Overlay - AC Structural	1/1/21
1000	3	CLYMAR AVE (S)	CYPRESS ST (W)	ALONDRA BLVD	AC	E	2	260	32	8,067	4/5/24	77	15	85	0	New Construction - Initial	1/1/80
2320	5	POINSETTIA AVE (S)	CYPRESS ST (E)	MYRRH ST (E)	AC	E	2	640	28	17,994	3/7/24	77	92	0	8	New Construction - Initial	1/1/80
2810	10	TICHENOR ST	ACACIA AVE (S)	WILLOWBROOK AVE (S)	AC	E	2	635	29	16,789	6/12/24	77	54	46	0	New Construction - Initial	1/1/80
1610	1	JOHNSON ST (E)	WILLOWBROOK AVE (S)	TAMARIND AVE (S)	AC	E	2	612	36	15,328	6/12/24	77	43	51	6	New Construction - Initial	1/1/80
950	5	CHERRY ST (W)	MATTHISEN AVE (N)	ARANBE AVE (N)	AC	E	2	614	36	15,343	6/18/24	77	90	9	1	New Construction - Initial	1/1/80
510	6	ARBUTUS ST (W)	OLEANDER AVE (N)	ACACIA AVE (N)	AC	E	2	913	36	25,152	2/29/24	78	87	13	0	Surface Treatment - Slurry Seal	1/19/16
2240	4	PECK ST	VAN NESS AVE (N)	LONG BEACH BLVD (N)	AC	E	2	1,578	30	42,061	6/17/24	78	62	18	20	New Construction - Initial	1/1/80
2360	10	RAYMOND ST	TAMARIND AVE (S)	ALAMEDA ST (S)	AC	E	2	710	35	21,627	6/12/24	78	100	0	0	New Construction - Initial	1/1/80
2540	7	SCHOOL ST	ARANBE AVE (N)	OLEANDER AVE (N)	AC	E	2	930	28	24,644	2/29/24	78	67	33	0	New Construction - Initial	1/1/80
2830	1	VAN NESS AVE	ELM ST (E)	ROSECRANS AVE (E)	AC	E	2	955	29	24,755	6/25/24	78	38	8	54	New Construction - Initial	1/1/80
3130	2	CASTLEGATE AVE (S)	CITY LIMITS	CALDWELL ST (E)	AAC	E	2	1,348	36	43,541	6/18/24	78	53	40	7	Overlay - AC Structural	1/18/11
2190	7	PAULSEN AVE (N)	SCHOOL ST (W)	COMPTON BLVD (W)	AC	E	2	635	26	16,341	2/29/24	78	61	39	0	New Construction - Initial	1/1/80
980	1	CLEMMER DR (E)	TARTAR LN (S)	END	AC	E	2	654	36	16,003	3/7/24	78	33	37	30	New Construction - Initial	1/1/80
2990	3	WILLIAMS AVE	ROSECRANS AVE	CITY LIMITS (N)	AC	E	2	75	31	3,881	6/26/24	78	100	0	0	New Construction - Initial	1/1/80
300	15	ACACIA AVE	WINONA AVE (W)	END (N)	AC	E	2	230	18	6,905	6/4/24	78	65	35	0	New Construction - Initial	1/1/80
3100	2	ARBUTUS ST (E)	END	ROSE AVE (N)	AC	E	2	137	36	2,923	6/10/24	78	80	20	0	New Construction - Initial	1/1/80
900	2	CASWELL AVE (S)	156TH ST (W)	CYPRESS ST (W)	AAC	E	2	1,482	36	41,356	6/3/24	78	32	11	57	Overlay - AC Structural	6/21/16
2040	2	NORTHWOOD AVE (S)	166TH ST (W)	CALDWELL ST (W)	AC	E	2	502	27	15,777	4/12/24	78	86	0	14	Slurry Seal	5/1/16
2330	11	POPLAR ST	ACACIA AVE (N)	CULVER AVE (N)	AC	E	2	475	27	13,002	2/29/24	78	51	39	10	New Construction - Initial	1/1/80
3290	2	LAUREL ST (W)	OLEANDER AVE (S)	BARRON AVE (S)	AC	E	2	690	32	23,812	6/5/24	78	66	24	10	New Construction - Initial	1/1/80
910	5	CEDAR ST (W)	ACACIA AVE (N)	CULVER AVE (N)	AC	E	2	491	36	13,537	2/29/24	78	95	0	5	New Construction - Initial	1/1/80
2040	3	NORTHWOOD AVE (S)	CALDWELL ST (W)	TICHENOR ST (W)	AC	E	2	580	27	17,978	4/12/24	78	100	0	0	Slurry Seal	5/1/16
510	5	ARBUTUS ST (W)	MATTHISEN AVE (N)	OLEANDER AVE (N)	AC	E	2	1,298	36	34,617	2/29/24	78	71	29	0	Surface Treatment - Slurry Seal	1/19/16
490	2	APRILIA AVE (S)	CLAUDE ST (W)	ALONDRA BLVD	AAC	E	2	888	36	24,183	4/16/24	79	14	84	2	Overlay - AC Structural	6/21/16
3000	7	WILLOW AVE	ROSECRANS AVE (E)	PECK ST (E)	AC	E	2	655	30	17,154	6/25/24	79	69	31	0	New Construction - Initial	1/1/80

BranchID	Sec ID	Name	From	To	Surface Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
500	7	ARANBE AVE	CRESSEY ST (W)	CITY LIMITS (N)	AC	E	2	574	26	14,825	6/18/24	79	66	31	3	New Construction - Initial	1/1/80
300	11	ACACIA AVE	ARBUTUS ST (W)	CEDAR ST (W)	AC	E	2	780	33	20,758	6/17/24	79	73	27	0	New Construction - Initial	1/1/80
2360	9	RAYMOND ST	WILLOWBROOK AVE (S)	TAMARIND AVE (S)	AC	E	2	590	40	22,334	6/12/24	79	100	0	0	New Construction - Initial	1/1/80
2800	6	THORSON AVE	BALES ST (E)	SAUNDERS ST (E)	AC	E	2	840	28	23,061	6/4/24	80	39	61	0	Complete Reconstruction - AC	3/31/20
1560	1	HICKORY AVE (N)	ROSECRANS AVE (W)	CEDAR ST (W)	AC	E	2	742	36	25,534	6/17/24	80	74	26	0	Surface Treatment - Slurry Seal	1/19/16
1220	5	DWIGHT AVE (S)	ALMOND ST (W)	MYRRH ST (W)	AC	E	2	585	36	18,339	5/30/24	80	39	61	0	Complete Reconstruction - AC	1/1/16
1520	9	HARRIS AVE	CITY LIMITS (S)	MCMILLAN ST (E)	AC	E	2	89	26	2,209	6/26/24	80	40	0	60	New Construction - Initial	1/1/80
1520	6	HARRIS AVE	LAUREL ST (E)	COMPTON BLVD (E)	AC	E	2	678	30	16,594	4/18/24	80	11	84	5	Complete Reconstruction - AC	5/1/16
320	1	ALAMEDA ST NB	END (S)	AUTO DR (S)	AC	I	2	715	33	21,050	6/24/24	80	75	25	0	New Construction - Initial	1/1/80
2740	4	TAMARIND AVE	MYRRH ST (E)	END (N)	AAC	E	2	260	40	11,930	6/5/24	80	65	35	0	Overlay - AC Structural	6/2/10
2800	8	THORSON AVE	CITY LIMITS (S)	MCMILLA ST (E)	AC	E	2	120	30	4,432	4/17/24	80	66	34	0	New Construction - Initial	1/1/80
3310	2	MAIE AVE (S)	151ST ST (W)	END (S)	AC	E	2	363	33	11,685	6/3/24	80	82	0	18	New Construction - Initial	1/1/80
2320	4	POINSETTIA AVE (S)	ALONDRA BLVD (E)	CYPRESS ST (E)	AC	E	2	690	29	17,534	3/7/24	80	100	0	0	New Construction - Initial	1/1/80
1660	2	KEMP AVE (S)	ALMOND ST (W)	MYRRH ST (W)	AC	E	2	563	36	16,792	5/30/24	80	22	78	0	Complete Reconstruction - AC	1/1/16
2330	13	POPLAR ST	END (E)	ROSE AVE (E)	AC	E	2	106	24	3,033	6/10/24	80	100	0	0	New Construction - Initial	1/1/80
3680	1	HUNSKAER AVE	MYRRH ST (E)	CITY LIMIT (S)	AC	E	2	462	15	12,908	6/18/24	81	76	24	0	Surface Treatment - Slurry Seal	12/31/19
2040	4	NORTHWOOD AVE (S)	TICHENOR ST (W)	ALONDRA BLVD (W)	AC	E	2	1,210	36	37,939	4/12/24	81	69	31	0	Slurry Seal	5/1/16
140	2	139TH ST (W)	WILMINGTON AVE (N)	PAULSEN AVE (N)	AAC	E	2	641	36	19,564	6/18/24	81	41	47	12	Overlay - AC Structural	11/18/11
1280	1	ESSEY AVE (S)	CITY LIMITS	CYPRESS ST (E)	AC	E	2	838	32	22,182	4/18/24	81	12	73	15	Complete Reconstruction - AC	5/1/16
2810	9	TICHENOR ST	END (W)	ACACIA AVE (S)	AC	E	2	250	36	8,669	6/12/24	81	25	70	5	Slurry Seal	1/1/15
480	1	ANZAC AVE (N)	131ST ST (W)	NORD ST (W)	AAC	E	2	815	36	21,915	6/18/24	81	48	25	27	Overlay - AC Structural	1/18/11
3610	1	CRANE CT	MARCELLE ST (E)	END (N)	AC	E	2	383	31	10,795	3/7/24	81	100	0	0	New Construction - Initial	1/1/80
1110	1	CRESSEY ST (W)	END (W)	END (E)	AC	E	2	793	36	34,927	6/11/24	81	77	23	0	Surface Treatment - Cape Seal	1/19/16
2010	12	MYRRH ST (E)	SAN JOSE AVE (S)	HUNSAKER AVE	AC	E	2	325	30	10,788	6/18/24	81	83	14	3	New Construction - Initial	1/1/80
2210	3	PEACH ST (W)	ARANBE AVE (N)	END	AC	E	2	893	28	22,665	6/18/24	81	96	4	0	New Construction - Initial	1/1/80
3330	2	MATTHISEN AVE (S)	ALMOND ST (W)	LAUREL ST (W)	AC	E	2	375	30	11,298	6/5/24	81	44	54	2	New Construction - Initial	1/1/80
2020	5	NESTOR AVE (N)	134TH ST (W)	133RD ST (W)	AC	E	2	571	32	15,193	4/15/24	82	57	40	3	New Construction - Initial	1/1/80
2090	1	ORCHARD ST	BULLIS RD (N)	BRADFIELD AVE (N)	AAC	E	2	1,128	36	36,709	4/17/24	82	5	93	2	Overlay - AC Structural	7/14/20
2700	1	STONEACRE AVE	GREENLEAF BLVD (E)	CALDWELL ST (E)	AAC	E	2	1,285	36	43,409	6/18/24	82	74	26	0	Slurry Seal	5/1/16
3670	1	SAN JOSE AVE (S)	CITY LIMIT (N)	MYRRH ST (E)	AC	E	2	584	28	22,263	6/18/24	82	85	15	0	New Construction - Initial	1/1/80
3120	3	BURRIS AVE (S)	MYRRH ST (E)	CYPRESS ST (E)	AC	E	2	640	36	17,110	6/3/24	82	86	14	0	Slurry Seal	1/19/16
2470	2	SAN MARCUS ST	BRADFIELD AVE (N)	HOLLY AVE (N)	AC	E	2	660	30	17,555	6/4/24	82	29	69	2	New Construction - Initial	1/1/80
480	3	ANZAC AVE (N)	STOCKWELL ST (W)	137TH ST (W)	AAC	E	2	637	36	18,543	6/18/24	82	48	52	0	Overlay - AC Structural	1/18/11
190	4	152ND ST (W)	TAJAUTA AVE (S)	MAIE AVE (N)	AC	E	2	660	36	20,478	6/3/24	82	42	58	0	Complete Reconstruction - AC	3/31/20
3000	4	WILLOW AVE	COMPTON BLVD (E)	PALMER ST (E)	AC	E	2	835	31	19,874	6/10/24	82	84	13	3	New Construction - Initial	1/1/80
2000	2	MURIEL AVE (S)	CITY LIMITS (N)	CITY LIMITS (S)	AC	E	2	85	36	2,911	6/18/24	83	36	64	0	New Construction - Initial	1/1/80
300	10	ACACIA AVE	COMPTON BLVD (W)	ARBUTUS ST (W)	AC	E	2	1,295	33	32,465	6/17/24	83	65	20	15	New Construction - Initial	1/1/80
2150	9	PALMER ST (W)	MATTHISEN AVE (N)	OLEANDER AVE (N)	AC	E	2	1,554	27	40,366	2/29/24	83	100	0	0	New Construction - Initial	1/1/80
2990	2	WILLIAMS AVE	CITY LIMITS (S)	MCMILLIAN ST (E)	AC	E	2	85	31	3,002	6/26/24	83	100	0	0	New Construction - Initial	1/1/80
3130	3	CASTLEGATE AVE (S)	CALDWELL ST (E)	ADANA ST (E)	AAC	E	2	972	36	26,346	6/18/24	83	26	74	0	Slurry Seal	5/1/16
1910	5	MAYO AVE (S)	CYPRESS ST (E)	MYRRH ST (E)	AC	E	2	641	28	16,996	6/3/24	84	73	27	0	New Construction - Initial	1/1/80
120	6	137TH ST (W)	GRAHAM AVE (N)	WILMINGTON AVE (N)	AC	E	2	927	36	28,493	5/28/24	84	23	68	9	New Construction - Initial	1/1/80
2920	4	WARD AVE	LAUREL ST (S)	COMPTON BLVD (E)	AAC	E	2	665	28	16,559	4/18/24	84	3	97	0	Overlay - AC Structural	7/14/20
3470	2	MCKINLEY AVE (N)	139TH ST	SAM LITTLETON ST	AC	E	2	1,176	25	44,919	5/28/24	84	70	29	1	Complete Reconstruction - AC	5/1/16
2690	5	STOCKWELL ST	ANZAC AVE (N)	END (E)	AC	E	2	545	54	30,847	5/29/24	85	71	29	0	Complete Reconstruction - AC	3/31/20
2820	5	TUCKER ST	VAN NESS AVE (N)	LONG BEACH BLVD	AAC	E	2	1,550	28	42,365	6/17/24	85	46	54	0	Overlay - AC Structural	7/14/20
1740	3	LIME ST (S)	CITY LIMIT (S)	CITY LIMIT (N)	AC	E	2	62	34	2,371	6/26/24	85	100	0	0	New Construction - Initial	1/1/80
2000	1	MURIEL AVE (S)	ALONDRA BLVD (E)	END (S)	AAC	E	2	831	28	20,851	6/25/24	85	11	38	51	Overlay - AC Structural	12/31/20
820	4	BUTLER AVE (S)	CITY LIMITS	MCMILLAN ST (E)	AC	E	2	89	36	2,818	6/26/24	85	100	0	0	New Construction - Initial	1/1/80
2640	1	SPRING AVE	COMPTON BLVD (E)	PALMER ST (E)	AAC	E	2	840	24	17,977	6/10/24	85	13	85	2	Overlay - AC Structural	6/13/23
2690	4	STOCKWELL ST	WILMINGTON AVE (N)	ANZAC AVE (N)	AC	E	2	295	54	14,518	5/29/24	85	93	7	0	Complete Reconstruction - AC	3/31/20
120	8	137TH ST (W)	ANZAC AVE (N)	GRAPE AVE (N)	AC	E	2	248	36	8,716	6/18/24	85	9	91	0	New Construction - Initial	1/1/80
1660	5	KEMP AVE (S)	CALDWELL ST (W)	EXMOORE AVE (S)	AC	E	2	1,015	36	28,280	4/12/24	85	2	98	0	New Construction - Initial	1/1/80
860	2	CARLIN AVE (E)	ALAMEDA ST (N)	CITY LIMITS	AC	E	2	1,634	34	58,213	6/24/24	85	58	42	0	Complete Reconstruction - AC	3/31/20
1220	4	DWIGHT AVE (S)	CALDWELL ST (W)	GREENLEAF BLVD (W)	AAC	E	2	1,137	36	27,967	4/12/24	86	24	76	0	Overlay - AC Structural	7/14/20
3520	2	SAM LITTLETON ST (W)	CORLETT AVE (N)	MCKINLEY AVE (N)	AC	E	2	879	26	44,201	5/28/24	86	77	0	23	Complete Reconstruction - AC	5/1/16
2880	1	WALDORF DR	CITY LIMITS (S)	CITY LIMITS (N)	AC	E	2	85	28	2,220	6/26/24	86	100	0	0	New Construction - Initial	1/1/80
3190	3	DWIGHT AVE (N)	MAPLE ST (W)	POPLAR ST	AC	E	2	742	28	20,906	5/30/24	86	100	0	0	Complete Reconstruction - AC	5/1/16
1760	4	LOCUST AVE (N)	SAN VINCENTE ST (E)	COMPTON BLVD (E)	AC	E	2	1,206	32	30,807	6/4/24	86	49	16	35	Complete Reconstruction - AC	3/31/20
800	1	BURRIS AVE (N)	ROSECRANS AVE	ELM ST (E)	AC	E	2	964	36	23,991	6/25/24	86	77	23	0	New Construction - Initial	1/1/80

BranchID	Sec ID	Name	From	To	Surface Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
3500	1	CARESS AVE (S)	GREENLEAF BLVD	CITY LIMIT (N)	AC	E	2	90	33	2,770	6/18/24	87	65	35	0	New Construction - Initial	1/1/80
400	4	ALMOND ST (W)	MATTHISEN AVE (S)	BARRON AVE (S)	AC	E	2	533	36	15,756	6/5/24	87	79	18	3	New Construction - Initial	1/1/80
910	2	CEDAR ST (W)	MATTHISEN AVE (N)	ARANBE AVE (S)	AC	E	2	609	36	15,633	2/29/24	87	95	0	5	New Construction - Initial	1/1/80
3690	1	PALM CT	OLEANDER AVE (S)	CDS (W)	AC	E	0	231	32	9,800	6/5/24	88	100	0	0	New Construction - Initial	1/1/80
200	1	153RD ST (W)	APRILLA AVE (S)	AMATHA AVE (S)	AC	E	2	1,131	36	29,936	4/5/24	88	33	64	3	Complete Reconstruction - AC	1/1/16
1320	2	EXMOOR AVE (S)	CALDWELL ST (W)	KEMP AVE (S)	AC	E	2	1,050	30	28,040	4/12/24	88	4	96	0	New Construction - Initial	1/1/80
1950	1	MEALY SY (E)	MONA BLVD (N)	TAMARIND AVE	AC	E	2	605	28	17,711	6/4/24	88	87	13	0	New Construction - Initial	1/1/80
2140	1	PALMER ST (E)	BRADFIELD AVE (N)	END (E)	AC	E	2	510	30	13,816	6/4/24	88	66	34	0	New Construction - Initial	1/1/80
1520	3	HARRIS AVE	ALONDRA BLVD (E)	LINSLEY ST (E)	AC	E	2	670	30	16,419	4/18/24	88	33	67	0	Complete Reconstruction - AC	5/1/16
100	1	135TH ST (W)	CENTRAL AVE (N)	PARMELEE AVE (N)	AC	E	2	1,171	36	39,258	4/15/24	88	100	0	0	New Construction - Initial	1/1/80
1190	1	DIANE DR (E)	WARD AVE (N)	PINE ST (E)	AAC	E	2	611	36	16,356	4/17/24	88	39	61	0	Overlay - AC Structural	7/14/20
3180	1	CYPRESS ST (W)	END (W)	APRILIA AVE (S)	AC	E	2	994	36	27,744	6/3/24	88	55	45	0	Complete Reconstruction - AC	5/1/15
3520	1	SAM LITTLETON ST (W)	CENTRAL AVE (N)	CORLETT AVE (N)	AC	E	2	1,069	26	53,843	5/28/24	89	100	0	0	Complete Reconstruction - AC	5/1/16
1130	1	CUZCO ST	GREENLEAF BLVD (E)	CITY LIMIT (N)	AC	E	2	91	36	2,971	6/18/24	89	44	56	0	New Construction - Initial	1/1/80
2150	10	PALMER ST (W)	OLEANDER AVE (N)	ACACIA AVE (N)	AC	E	2	695	27	17,895	2/29/24	89	100	0	0	New Construction - Initial	1/1/80
490	3	APRILIA AVE (S)	ALONDRA BLVD (W)	156TH ST (W)	AC	E	2	1,738	36	49,270	4/16/24	89	49	51	0	Complete Reconstruction - AC	5/1/15
120	7	137TH ST (W)	WILMINGTON AVE (N)	ANZAC AVE (N)	AC	E	2	317	36	7,398	6/18/24	89	15	85	0	New Construction - Initial	1/1/80
3350	1	MYRRH ST (W)	DWIGHT AVE (S)	KEMP AVE (S)	AAC	E	2	1,264	36	39,490	5/30/24	90	73	21	6	Overlay - AC Structural	6/21/16
1080	1	CORLETT AVE (S)	156TH ST (W)	CYPRESS ST (W)	AC	E	2	1,295	36	37,153	6/3/24	90	92	0	8	Complete Reconstruction - AC	5/1/15
2280	2	PIXLEY ST	PANNES AVE (N)	THORSON AVE (N)	AC	E	2	826	33	19,610	6/4/24	90	39	0	61	Complete Reconstruction - AC	3/31/20
1440	9	GRANDEE AVE	EL SEGUNDO BLVD (W)	127TH ST (W)	AC	E	2	460	28	9,651	5/28/24	90	20	80	0	Complete Reconstruction - AC	3/31/20
2770	1	TAPER AVE	CYPRESS ST (W)	156TH ST (W)	AAC	E	2	1,470	30	43,556	6/3/24	90	45	55	0	Overlay - AC Structural	6/21/16
3410	2	PANNES AVE (S)	LAUREL ST (E)	MYRRH ST (E)	AC	E	2	669	32	18,451	4/18/24	90	16	84	0	New Construction - Initial	1/1/80
2330	4	POPLAR ST	CLIVEDEN ST	DWIGHT AVE (N)	AAC	E	2	740	32	22,639	5/30/24	90	21	79	0	Overlay - AC Structural	7/14/20
490	4	APRILIA AVE (S)	154TH ST (W)	COMPTON BLVD (W)	AC	E	2	1,250	36	40,074	4/5/24	90	77	23	0	Complete Reconstruction - AC	1/1/17
3650	1	WILMINGTON AVE (FRONTAGE)	STOCKWELL ST (W)	NORD ST (W)	AC	E	2	746	24	17,732	5/29/24	90	28	72	0	Complete Reconstruction - AC	3/31/20
2440	1	SALINAS AVE	MCKINLEY AVE	CITY LIMITS (N)	AC	E	2	1,210	36	41,262	5/28/24	90	93	0	7	Complete Reconstruction - AC	3/31/20
300	6	ACACIA AVE	JOHNSON ST (W)	CLAUDE ST (W)	AAC	E	2	1,018	36	29,830	6/12/24	90	14	86	0	Overlay - AC Structural	7/14/20
3410	1	PANNES AVE (S)	COMPTON BLVD (E)	LAUREL ST (S)	AC	E	2	673	32	18,415	4/18/24	91	19	81	0	New Construction - Initial	1/1/80
790	2	BULLIS RD (N)	ORCHARD ST (E)	PINE ST (E)	AC	E	2	766	36	38,810	4/17/24	92	100	0	0	New Construction - Initial	1/1/80
2870	2	WADSWORTH AVE	CALDWELL ST (W)	CLAUDE ST (W)	AAC	E	2	515	30	14,652	4/16/24	92	4	96	0	Overlay - AC Structural	7/14/20
460	1	AMANTHA AV	COMPTON BLVD (W)	152ND ST (W)	AC	E	2	619	36	19,336	4/5/24	92	100	0	0	Complete Reconstruction - AC	1/1/17
3350	3	MYRRH ST (W)	ACACIA AVE (S)	PACIFIC ELECTRIC RR	AC	E	4	704	36	39,660	6/4/24	92	54	46	0	New Construction - Initial	1/1/80
3350	2	MYRRH ST (W)	OLEANDER AVE (S)	ACACIA AVE (S)	AC	E	2	661	36	24,376	6/4/24	92	100	0	0	New Construction - Initial	1/1/80
570	2	ATLANTIC DR	CALDWELL ST (E)	GREENLEAF BLVD (E)	AC	E	2	1,330	34	35,587	6/18/24	92	72	0	28	Complete Reconstruction - AC	5/1/16
1180	1	DERN AVE (N)	134TH ST (W)	132TH ST (W)	AC	E	2	973	36	25,470	5/28/24	92	36	64	0	Complete Reconstruction - AC	3/31/20
2280	1	PIXLEY ST	ESSEY AVE (N)	PANNES AVE (N)	AC	E	2	648	20	16,161	6/4/24	92	100	0	0	Complete Reconstruction - AC	3/31/20
960	3	CHESTER AVE (S)	ALONDRA BLVD (E)	MYRRH ST (E)	AAC	E	2	1,361	36	35,570	6/3/24	93	27	65	8	Overlay - AC Structural	7/14/20
570	1	ATLANTIC DR	ATLANTIC AVE (S)	CALDWELL ST (E)	AC	E	2	806	34	21,176	6/18/24	93	41	0	59	Complete Reconstruction - AC	5/1/16
790	5	BULLIS RD (N)	QUEENSDALE ST (E)	ROSECRANS AVE (E)	AC	E	2	651	36	30,884	4/17/24	93	63	0	37	New Construction - Initial	1/1/80
1520	4	HARRIS AVE	LINSLEY ST (E)	MYRRH ST (E)	AC	E	2	667	30	17,316	4/18/24	93	59	41	0	Complete Reconstruction - AC	5/1/16
790	7	BULLIS RD (N)	PATTIE CT (E)	COMPTON BLVD (E)	AC	E	2	1,583	36	81,208	6/17/24	93	70	0	30	New Construction - Initial	1/1/80
790	6	BULLIS RD (N)	ROSECRANS AVE (E)	PATTIE CT (E)	AC	E	2	1,123	36	51,075	6/17/24	93	56	0	44	New Construction - Initial	1/1/80
1580	1	HOLLY AVE (N)	BALES ST (E)	SAN VINCENTE ST (E)	AC	E	2	323	36	5,839	6/4/24	94	100	0	0	Complete Reconstruction - AC	3/31/20
1090	1	CORYDON ST (W)	APRILIA AVE (S)	AMANTHA AVE (S)	AC	E	2	1,103	36	27,755	4/5/24	94	100	0	0	Complete Reconstruction - AC	1/1/16
190	1	152ND ST (W)	APRILLA AVE (S)	AMANTHA AVE (S)	AC	E	2	1,128	36	30,782	4/5/24	94	62	38	0	Complete Reconstruction - AC	1/1/16
90	3	134TH ST (W)	PARMELEE AVE (N)	ELVA AVE (N)	AAC	E	2	786	36	22,077	4/15/24	94	100	0	0	Overlay - AC Structural	7/14/20
460	2	AMANTHA AV	152ND ST (W)	154TH ST (W)	AC	E	2	624	36	20,471	4/5/24	94	100	0	0	Complete Reconstruction - AC	1/1/17
60	1	132ND ST (W)	SALINAS AVE (N)	CENTRAL AVE (N) FRONTAGE RD	AAC	E	2	1,773	33	58,780	5/28/24	94	77	0	23	Overlay - AC Structural	7/14/20
790	3	BULLIS RD (N)	PINE ST (E)	TUCKER ST (E)	AC	E	2	771	36	38,553	4/17/24	94	90	0	10	New Construction - Initial	1/1/80
2480	1	SAN MATEO ST	END (W)	HARRIS AVE	AC	E	2	298	27	8,810	6/4/24	95	100	0	0	Complete Reconstruction - AC	3/31/20
2010	11	MYRRH ST (E)	CITY LIMITS (W)	GIBSON AVE (S)	AAC	E	2	271	32	8,152	3/7/24	95	100	0	0	Overlay - AC Structural	7/14/20
1270	1	ELVA AV (N)	134TH ST (W)	138TH ST (W)	AAC	E	2	1,554	28	46,749	4/15/24	95	71	0	29	Overlay - AC Structural	7/14/20
790	1	BULLIS RD (N)	CITY LIMITS	ORCHARD ST (E)	AC	E	2	567	36	25,742	4/17/24	95	100	0	0	New Construction - Initial	1/1/80
790	4	BULLIS RD (N)	TUCKER ST (E)	QUEENSDALE ST (E)	AC	E	2	631	36	32,425	4/17/24	95	100	0	0	New Construction - Initial	1/1/80
1190	2	DIANE DR (E)	BRADFIELD AVE (N)	STOCKTON AVE (E)	AAC	E	2	771	36	20,822	4/17/24	95	22	67	11	Overlay - AC Structural	7/14/20
620	1	BALES ST	BRADFIELD AVE (N)	HOLLY AVE (N)	AC	E	2	495	36	12,598	6/4/24	95	100	0	0	Complete Reconstruction - AC	3/31/20
3150	2	CHESTER AVE (N)	PALMER ST (E)	ELM ST (E)	AAC	E	2	887	36	20,180	6/25/24	96	31	0	69	Overlay - AC Structural	6/13/23
2520	2	SAUNDERS ST	BRADFIELD AVE (N)	END (E)	AC	E	2	480	26	14,715	6/4/24	96	100	0	0	Complete Reconstruction - AC	3/31/20
2930	1	WASHINGTON AVE	GREENLEAF BLVD (E)	CALDWELL ST (E)	AAC	E	2	1,320	28	36,927	6/18/24	96	95	0	5	Overlay - AC Structural	6/21/16

BranchID	Sec ID	Name	From	To	Surface Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
2080	3	OLEANDER AVE (S)	ALONDRA BLVD (W)	GATE	AC	E	2	213	33	8,269	6/5/24	96	100	0	0	New Construction - Initial	1/1/80
2940	1	WATER WAY	END (S)	134TH ST (W)	AC	E	2	431	36	9,003	4/15/24	96	100	0	0	New Construction - Initial	1/1/80
2470	4	SAN MARCUS ST	END (W)	HARRIS AVE	AC	E	2	300	28	8,245	6/4/24	96	100	0	0	Complete Reconstruction - AC	3/31/20
2380	1	RIDDLE AVE	132ND ST (W)	134TH ST (W)	AC	E	2	955	27	25,374	5/28/24	96	100	0	0	Complete Reconstruction - AC	3/31/20
3000	5	WILLOW AVE	PALMER ST (E)	ELM ST (E)	AAC	E	2	775	23	19,607	6/10/24	96	100	0	0	Overlay - AC Structural	6/13/23
3430	2	PEARL AVE (S)	MYRRH ST (E)	ALONDRA BLVD (E)	AAC	E	2	1,363	27	37,487	6/3/24	97	100	0	0	Overlay - AC Structural	7/14/20
2520	1	SAUNDERS ST	END (W)	BRADFIELD AVE (N)	AC	E	2	270	26	7,211	6/4/24	97	100	0	0	Complete Reconstruction - AC	3/31/20
780	1	BULLIS RD (S)	COMPTON BLVD (E)	MYRRTH ST (E)	AC	E	2	1,340	36	49,243	4/18/24	97	72	0	28	New Construction - Initial	1/1/80
680	11	BENNETT ST (E)	END (W)	WILLOWBROOK AVE (S)	AAC	E	2	655	40	17,737	6/12/24	97	57	0	43	Overlay - AC Structural	6/13/23
3000	6	WILLOW AVE	ELM ST (E)	ROSECRANS AVE (E)	AAC	E	2	954	26	22,204	6/10/24	97	100	0	0	Overlay - AC Structural	6/13/23
780	2	BULLIS RD (S)	MYRRH ST (E)	CYPRESS ST (E)	AC	E	2	657	36	22,077	4/18/24	97	60	0	40	New Construction - Initial	1/1/80
2930	2	WASHINGTON AVE	CALDWELL ST (E)	ALONDRA BLVD (E)	AAC	E	2	1,330	28	36,507	6/18/24	97	100	0	0	Overlay - AC Structural	6/13/23
780	3	BULLIS RD (S)	CYPRESS ST (E)	CITY LIMITS	AC	E	2	847	36	34,949	4/18/24	97	69	0	31	Cape Seal	1/1/15
3390	1	PALM ST (E)	WILLOWBROOK AVE (S)	ALAMEDA ST (S)	AC	E	2	1,121	33	29,330	6/5/24	97	100	0	0	New Construction - Initial	1/1/80
1680	2	KILLEN PL (E)	BRADFIELD AVE (N)	LOCUST AVE (N)	AAC	E	2	1,250	36	34,579	4/17/24	97	19	0	81	Overlay - AC Structural	3/1/24
70	1	133RD ST (W)	CENTRAL AVE (N)	PARMELEE AVE (N)	AAC	E	2	1,179	36	40,897	4/15/24	97	0	100	0	Overlay - AC Structural	1/1/24
120	5	137TH ST (W)	GRANDEE AVE (N)	GRAHAM AVE (N)	AC	E	2	292	36	9,309	5/28/24	97	100	0	0	New Construction - Initial	1/1/80
3650	2	WILMINGTON AVE (FRONTAGE)	NORD ST (W)	131ST ST (W)	AC	E	2	815	24	18,584	5/29/24	98	100	0	0	Complete Reconstruction - AC	3/31/20
2720	8	TAJAUTA AVE	POPLAR ST (W)	SPRUCE ST (W)	AAC	E	2	950	44	41,113	5/30/24	98	100	0	0	Overlay - AC Structural	7/14/20
2720	9	TAJAUTA AVE	SPRUCE ST (W)	ROSECRANS AVE (W)	AAC	E	2	182	49	6,092	5/30/24	98	100	0	0	Overlay - AC Structural	7/14/20
1440	5	GRANDEE AVE	138TH ST (W)	136TH ST (W)	AAC	E	2	984	34	30,849	5/28/24	98	34	0	66	Overlay - AC Structural	7/14/20
2720	6	TAJAUTA AVE	COMPTON BLVD (W)	PALMER ST (W)	AAC	E	2	670	32	21,328	5/30/24	99	100	0	0	Overlay - AC Structural	7/14/20
3260	2	KEENE AVE (S)	ALONDRA BLVD (W)	157TH ST (W)	AAC	E	2	1,058	36	37,678	4/5/24	99	100	0	0	Overlay - AC Structural	6/13/23
2720	7	TAJAUTA AVE	PALMER ST (W)	POPLAR ST (W)	AAC	E	2	780	34	25,382	5/30/24	99	100	0	0	Overlay - AC Structural	7/14/20
2030	1	NORD ST (W)	WILMINGOTN AVE (N)	GRAPE AVE (N)	AAC	E	2	504	32	12,881	6/18/24	99	100	0	0	Overlay - AC Structural	4/28/20
70	4	133RD ST (W)	COMPTON AVE (N)	GRANDEE AVE (N)	AAC	E	2	957	36	24,642	5/29/24	99	100	0	0	Overlay - AC Structural	6/13/23
100	2	135TH ST (W)	PARMELEE AVE (N)	ELVA AVE (N)	AC	E	2	955	36	24,387	4/15/24	99	48	0	52	New Construction - Initial	1/1/80
1280	3	ESSEY AVE (S)	LAUREL ST (E)	COMPTON BLVD (E)	AAC	E	2	675	32	17,958	4/18/24	99	100	0	0	Overlay - AC Structural	6/13/23
2170	2	PARMELEE AVE (N)	PIRU ST (W)	134TH ST (W)	AAC	E	2	744	32	25,334	4/15/24	99	58	0	42	Overlay - AC Structural	4/6/21
2170	3	PARMELEE AVE (N)	134TH ST (W)	131ST ST (W)	AAC	E	2	789	32	28,665	4/15/24	99	58	0	42	Overlay - AC Structural	4/6/21
2170	1	PARMELEE AVE (N)	END	PIRU ST (W)	AAC	E	2	914	32	28,733	4/15/24	99	58	0	42	Overlay - AC Structural	4/6/21
2600	2	SLATER AVE	134TH PL (W)	END (N)	AAC	E	2	820	36	28,947	5/28/24	99	100	0	0	Overlay - AC Structural	6/13/23
2030	2	NORD ST (W)	GRAPE AVE (N)	END (E)	AAC	E	2	327	32	8,401	6/18/24	99	100	0	0	Overlay - AC Structural	4/28/20
1030	3	COMPTON AVE	130TH ST (W)	EL SEGUNDO BLVD (W)	AAC	E	2	790	55	38,601	5/28/24	99	46	0	54	Overlay - AC Structural	1/18/11
2390	6	ROSE AVE	LAUREL ST (E)	COMPTON BLVD (E)	AC	E	2	682	36	17,065	6/10/24	99	100	0	0	New Construction - Initial	1/1/80
1440	8	GRANDEE AVE	130TH ST (W)	EL SEGUNDO BLVD (W)	AAC	E	2	792	34	22,159	5/28/24	99	100	0	0	Overlay - AC Structural	7/14/20
1440	6	GRANDEE AVE	136TH ST (W)	133RD ST (W)	AAC	E	2	828	34	25,956	5/28/24	99	100	0	0	Overlay - AC Structural	7/14/20
1680	1	KILLEN PL (E)	ORCHARD ST (E)	KILLEN PL (E)	AAC	E	2	1,071	36	28,423	4/17/24	99	100	0	0	Overlay - AC Structural	7/14/20
2820	7	TUCKER ST	BRADFORD AVE (N)	PANNES AVE (N)	AAC	E	2	295	29	8,385	4/17/24	99	100	0	0	Overlay - AC Structural	7/14/20
260	1	159TH ST (W)	KEENE AVE (S)	CENTRAL AVE (S)	AAC	E	2	656	36	21,768	4/5/24	100	0	0	100	Overlay - AC Structural	1/1/24
2980	1	WHITEMARSH AVE	GREENLEAF BLVD (W)	CALDWELL ST (W)	AAC	E	2	1,150	31	32,477	4/12/24	100	100	0	0	Overlay - AC Structural	6/13/23
70	5	133RD ST (W)	GRANDEE AVE (N)	WILMINGTON AVE (N)	AAC	E	2	1,208	36	31,472	5/29/24	100	100	0	0	Overlay - AC Structural	6/13/23
80	2	134TH PL (W)	GRANDEE AVE (N)	WILMINGTON AVE (N)	AAC	E	2	1,208	36	32,140	5/29/24	100	100	0	0	Overlay - AC Structural	6/13/23
2170	4	PARMELEE AVE (N)	131ST ST (W)	EL SEGUNDO BLVD (W)	AAC	E	2	1,510	32	51,691	4/15/24	100	100	0	0	Overlay - AC Structural	4/6/21
1440	7	GRANDEE AVE	133RD ST (W)	130TH ST (W)	AAC	E	2	967	34	30,385	5/28/24	100	100	0	0	Overlay - AC Structural	7/14/20
1030	2	COMPTON AVE	132ND ST (W)	130TH ST (W)	AC	E	2	645	55	35,025	5/28/24	100	100	0	0	New Construction - Initial	1/1/80
1030	1	COMPTON AVE	SLATER AVE (N)	132ND ST (W)	AC	E	2	805	55	41,082	5/28/24	100	100	0	0	New Construction - Initial	1/1/80
1940	2	MCMILLAN ST	BRADFIELD AVE (N)	PINE ST (E)	AC	E	2	982	31	26,765	4/17/24	100	100	0	0	New Construction - Initial	1/1/80
2650	3	SPRUCE ST	TAJAUTA AVE (N)	BROADACRES AVE (N)	AAC	E	2	810	36	25,975	5/30/24	100	100	0	0	Overlay - AC Structural	6/13/23
460	3	AMANTHA AV	154TH ST (W)	156TH ST (W)	AAC	E	2	434	36	12,523	4/5/24	100	0	0	100	Overlay - AC Structural	1/1/24
2650	4	SPRUCE ST	BROADACRES AVE (N)	DWIGHT AVE (N)	AAC	E	2	495	36	16,208	5/30/24	100	0	0	100	Overlay - AC Structural	6/13/23
1330	2	EZMIRLIAN ST (E)	BULLIS RD (N)	PANNES AVE (N)	AAC	E	2	1,302	28	34,874	4/17/24	100	0	0	100	Overlay - AC Structural	6/13/23
1380	1	GIBSON ST (S)	CITY LIMITS	McMILLAN ST (E)	AAC	E	2	616	75	44,208	6/26/24	100	0	0	0	Overlay - AC Structural	3/1/24
360	1	ALBERTSON AVE (S)	SPRUCE ST (W)	145TH ST (W)	AAC	E	2	564	36	15,908	6/3/24	100	0	0	0	Overlay - AC Structural	3/1/24
210	2	154TH ST (W)	CASTWELL AVE (S)	APRILLA AVE (S)	AAC	E	2	580	36	20,291	4/5/24	100	0	0	0	Overlay - AC Structural	1/1/24
210	3	154TH ST (W)	APRILLA AVE (S)	KEENE AVE (S)	AAC	E	2	988	36	31,856	4/5/24	100	0	0	0	Overlay - AC Structural	1/1/24
210	4	154TH ST (W)	KEENE AVE (S)	CENTRAL AVE (S)	AAC	E	2	524	36	16,763	4/5/24	100	0	0	0	Overlay - AC Structural	1/1/24
210	1	154TH ST (W)	CITY LIMITS	CASTWELL AVE (S)	AAC	E	2	438	36	14,834	4/5/24	100	0	0	0	Overlay - AC Structural	1/1/24
240	1	157TH ST (W)	KEENE AVE (S)	AMANTHA AVE (S)	AAC	E	2	473	36	17,914	4/5/24	100	0	0	0	Overlay - AC Structural	1/1/24
250	1	158TH ST (W)	KEENE AVE (S)	AMANTHA AVE (S)	AAC	E	2	483	36	13,254	4/5/24	100	0	0	0	Overlay - AC Structural	1/1/24

BranchID	Sec ID	Name	From	To	Surface Type	Rank	Lanes	L	W	Area	Insp. Date	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Work Type	Work Date
30	1	129TH ST (W)	GRANDEE AVE (N)	END	AAC	E	2	581	27	15,510	5/29/24	100	0	0	0	Overlay - AC Structural	1/1/24
3280	1	KILLEN CT (E)	KILLEN PL (E)	END (N)	AAC	E	2	131	36	5,419	4/17/24	100	0	0	0	Overlay - AC Structural	1/1/24
460	4	AMANTHA AV	156TH ST (W)	159TH ST (W)	AAC	E	2	728	36	24,214	4/5/24	100	0	0	0	Overlay - AC Structural	1/1/24
50	1	131TH ST (W)	CITY LIMITS	PARMELEE AVE (N)	AAC	E	2	1,152	36	41,062	4/15/24	100	0	0	0	Overlay - AC Structural	1/1/24
60	2	132ND ST (W)	CENTRAL AVE (S)	PARMELEE AVE (N)	AAC	E	2	1,178	36	40,402	4/15/24	100	0	0	0	Overlay - AC Structural	1/1/24
70	2	133RD ST (W)	PARMELEE AVE (N)	KALSMAN AVE (N)	AAC	E	2	516	36	16,489	4/15/24	100	0	0	0	Overlay - AC Structural	1/1/24
1750	1	LINSLEY ST (E)	HARRIS AVE (S)	CITY LIMITS	AAC	E	2	328	32	7,672	4/18/24	100	0	0	0	Overlay - AC Structural	6/13/23
2600	1	SLATER AVE	136TH ST (W)	134TH PL (W)	AAC	E	2	750	49	31,103	5/28/24	100	0	0	0	Overlay - AC Structural	6/13/23
800	2	BURRIS AVE (N)	ELM ST (E)	PALMER ST (E)	AAC	E	2	887	36	23,246	6/10/24	100	0	0	0	Overlay - AC Structural	6/13/23
1010	2	COCOA AVE (W)	OLEANDER AVE (S)	ACACIA AVE (S)	AC	E	2	656	36	21,095	6/5/24	100	0	0	0	New Construction - Initial	1/1/80
110	1	136TH ST (W)	GRAHAM AVE (N)	HOLMES AVE (N)	AC	E	2	294	36	9,791	5/28/24	100	0	0	0	New Construction - Initial	1/1/80
110	5	136TH ST (W)	BANDERA AVE	WILMINGONT AVE (N)	AC	E	2	339	36	10,306	5/28/24	100	0	0	0	New Construction - Initial	1/1/80
110	4	136TH ST (W)	HOLMES AVE (N)	BANDERA AVE	AC	E	2	277	36	9,567	5/28/24	100	0	0	0	New Construction - Initial	1/1/80
110	2	136TH ST (W)	SLATER AVE (N)	GRANDE AVE	AC	E	2	568	36	18,791	5/28/24	100	0	0	0	New Construction - Initial	1/1/80
110	3	136TH ST (W)	GRANDE AVE	GRAHAM AVE (N)	AC	E	2	294	36	9,692	5/28/24	100	0	0	0	New Construction - Initial	1/1/80
1390	1	GLADYS ST (E)	END (W)	WILLOW AVE (S)	AC	E	2	338	36	9,854	3/7/24	100	0	0	0	New Construction - Initial	1/1/80
2700	3	STONEACRE AVE	OLANDA ST	CITY LIMITS (N)	AC	E	2	930	27	25,188	4/17/24	100	0	0	0	New Construction - Initial	1/1/80
3000	3	WILLOW AVE	LAUREL ST (E)	COMPTON BLVD (E)	AC	E	2	675	27	17,786	3/7/24	100	0	0	0	New Construction - Initial	1/1/80
3000	2	WILLOW AVE	MYRRH ST (E)	LAUREL ST (E)	AC	E	2	670	27	17,238	3/7/24	100	0	0	0	New Construction - Initial	1/1/80
3000	1	WILLOW AVE	CALDWELL ST (E)	MYRRH ST (E)	AC	E	2	645	22	14,430	3/7/24	100	0	0	0	New Construction - Initial	1/1/80
3160	2	COCOA ST (E)	SANTA FE AVE (S)	END	AC	E	2	226	36	8,426	6/3/24	100	0	0	0	New Construction - Initial	1/1/80
70	3	133RD ST (W)	SLATER AVE (N)	COMPTON AVE (N)	AC	E	2	339	36	8,429	5/29/24	100	0	0	0	New Construction - Initial	1/1/80
								123.2		**19,207,990**							

SECTION IV
FORECAST MAINTENANCE & REHABILITATION (FMR) REPORT

A. Projected Annual Budget, Five Year Plan (2024-2029)

A. FORECAST MAINTENANCE & REHABILITATION (FMR) REPORT

Listed in chronological order by plan year, rank (Arterial/Collector & Local) then alphabetically by street name, this report presents the year and action corresponding to the next scheduled work activity for each segment within the pavement network.

ACTUAL / PROJECTED BUDGET – The Actual budget model was generated for the City to demonstrate how the City's 5-Year PMP funding allocation performs against the current citywide conditions.

In general sections are chosen first and foremost on available budget; secondly, the square footage of each section plays a large factor. The software initially chooses the draft sections that will increase PCI, sustain PCI or slow PCI deterioration within the budgeted timeframe. Additionally, the types of distress, extents of distress and severities of distress (high, medium, low) also determine how sections are/can be selected.

All multi-year budget projections include an annual 4% unit cost inflation rate for the term of the budget forecast, as well as a 25% contingency on material costs which typically cover additional project costs for contract administration, design, construction management.

The City of Compton makes all final decisions on what pavement sections are scheduled for improvement and within which fiscal year.

FY	BranchID	Sec iD	Name	From	To	Surface Type	Rank	Lanes	L	W	Area	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Maint. Type	Total $
			Arterials / Collectors														
2024-25	530	1	ARTESIA BLVD EB	CENTRAL AVE (S)	1285' E of CENTRAL AVE	AC	A	2	1,285	24	49,982	39	59	40	1	ARHM	$281,399
2024-25	530	2	ARTESIA BLVD EB	1285' E of CENTRAL AVE	2570' E of CENTRAL AVE	AC	A	2	1,285	24	38,137	44	61	38	1	ARHM	$214,711
2024-25	530	3	ARTESIA BLVD EB	2580' E of CENTRAL AVE	WILMINGTON AVE (S)	AC	A	2	1,285	24	46,533	42	50	34	16	ARHM	$261,981
2024-25	530	4	ARTESIA BLVD EB	WILMINGTON AVE (S)	1850' E of WILMINGTON	AC	A	2	1,850	24	62,192	31	41	51	8	ARHM	$350,141
2024-25	530	6	ARTESIA BLVD EB	ACACIA AVE	RR TRACK OVERPASS	AC	A	2	748	22	17,887	48	35	65	0	ARHM	$100,704
2024-25	530	7	ARTESIA BLVD EB	RR TRACK OVERPASS	ALAMEDA ST OVERPASS	AC	A	2	895	22	29,675	57	37	59	4	ARHM	$167,070
2024-25	530	8	ARTESIA BLVD EB	ALAMEDA ST OVERPASS	SANTA FE AVE	AC	A	2	570	34	22,409	60	55	45	0	ARHM	$126,163
2024-25	540	1	ARTESIA BLVD WB	ALAMEDA ST OVERPASS	RR TRACKS OVERPASS	AC	A	4	885	22	22,383	51	29	71	0	ARHM	$126,016
2024-25	540	3	ARTESIA BLVD WB	AMERICAN DAWN INC	WILMINGTON AVE (S)	AC	A	2	2,003	33	64,943	27	41	57	2	ARHM	$365,629
2024-25	1780	1	LONG BEACH BLVD NB	CITY LIMITS (S)	CALDWELL ST (E)	AC	A	2	1,373	32	45,022	68	56	41	3	Type II Slurry	$39,619
2024-25	1780	2	LONG BEACH BLVD NB	CALDWELL ST (E)	ALONDRA BLVD (E)	AC	A	2	1,387	35	49,428	72	47	42	11	Type II Slurry	$43,497
2024-25	1780	3	LONG BEACH BLVD NB	ALONDRA BLVD (E)	MYRRH ST (E)	AC	A	2	1,363	31	42,531	69	56	32	12	Type II Slurry	$37,427
2024-25	1780	4	LONG BEACH BLVD NB	MYRRH ST (E)	COMPTON BLVD (E)	AC	A	2	1,330	32	41,533	69	50	34	16	Type II Slurry	$36,549
2024-25	1780	5	LONG BEACH BLVD NB	COMPTON BLVD (E)	ELM ST (E)	AC	A	2	1,340	31	38,232	71	54	37	9	Type II Slurry	$33,644
2024-25	1780	6	LONG BEACH BLVD NB	ELM ST (E)	ROSECRANS AVE (E)	AC	A	2	1,360	32	41,843	58	57	27	16	ARHM	$235,576
2024-25	1780	7	LONG BEACH BLVD NB	ROSECRANS AVE (E)	EZMIRLIAN ST (E)	AC	A	2	1,090	34	33,548	61	64	29	7	ARHM	$188,875
2024-25	1780	8	LONG BEACH BLVD NB	EZMIRLIAN ST (E)	ARLINGTON ST (E)	AC	A	2	1,066	34	34,931	57	62	20	18	ARHM	$196,662
2024-25	1780	9	LONG BEACH BLVD NB	ARLINGTON ST (E)	CITY LIMITS (N)	AC	A	2	750	32	24,824	60	62	22	16	ARHM	$139,759
2024-25	3510	1	LONG BEACH BLVD SB	CITY LIMITS (N)	ARLINGTON ST (E)	AC	A	2	750	31	23,724	53	44	46	10	ARHM	$133,566
2024-25	3510	2	LONG BEACH BLVD SB	ARLINGTON ST (E)	EZMIRLIAN ST (E)	AC	A	2	1,065	31	35,133	46	53	34	13	ARHM	$197,799
2024-25	3510	3	LONG BEACH BLVD SB	EZMIRLIAN ST (E)	ROSECRANS AVE (E)	AC	A	2	1,090	31	34,395	53	69	30	1	ARHM	$193,644
2024-25	3510	4	LONG BEACH BLVD SB	ROSECRANS AVE (E)	ELM ST (E)	AC	A	2	1,360	28	38,806	58	43	32	25	ARHM	$218,478
2024-25	3510	5	LONG BEACH BLVD SB	ELM ST (E)	COMPTON BLVD (E)	AC	A	2	1,340	28	41,223	62	53	32	15	ARHM	$232,085
2024-25	3510	6	LONG BEACH BLVD SB	COMPTON BLVD (E)	MYRRH ST (E)	AC	A	2	1,330	28	36,739	64	37	61	2	ARHM	$206,841
2024-25	3510	7	LONG BEACH BLVD SB	MYRRH ST (E)	ALONDRA BLVD (E)	AC	A	2	1,365	29	40,386	70	56	44	0	Type II Slurry	$35,540
2024-25	3510	8	LONG BEACH BLVD SB	ALONDRA BLVD (E)	CALDWELL ST (E)	AC	A	2	1,385	34	45,502	67	53	39	8	ARHM	$256,176
2024-25	3510	9	LONG BEACH BLVD SB	CALDWELL ST (E)	CITY LIMITS (S)	AC	A	2	1,375	34	42,070	70	55	35	10	Type II Slurry	$37,022
2024-25	2510	1	SANTA FE AVE NB	91 FWY BRIDGE	ARTESIA BLVD (E)	AC	A	3	240	57	9,396	35	26	69	5	ARHM	$52,899
2024-25	2510	2	SANTA FE AVE NB	ARTESIA BLVD (S)	TARTAR LN (S)	AC	A	2	1,310	57	48,946	84	73	27	0	Type II Slurry	$43,072
2024-25	2500	11	SANTA FE AVE SB	AUTO DRIVE (S)	ARTESIA BLVD (E)	AC	A	2	1,180	32	56,491	63	49	51	0	ARHM	$318,044
2024-25	2500	12	SANTA FE AVE SB	ARTESIA BLVD (E)	CITY LIMIT (S)	AC	A	3	245	42	7,244	38	26	67	7	ARHM	$40,784
2024-25	2500	5	SANTA FE AVE SB	ELM ST (E)	COMPTON BLVD (E)	AAC	A	2	1,760	36	63,198	78	58	42	0	Type II Slurry	$55,614
																	$4,966,987
2025-26	320	10	ALAMEDA ST NB	1450' N of ROSECRANS	PINE ST (E)	AC	B	2	1,290	46	61,394	53	59	30	11	ARHM	$359,769
2025-26	320	11	ALAMEDA ST NB	PINE ST (E)	CARLIN AVE (E)	AC	B	2	1,320	48	55,898	83	83	0	17	Type II Slurry	$51,426
2025-26	320	12	ALAMEDA ST NB	CARLIN AVE (E)	BANNING ST (E)	AC	B	2	1,325	46	60,576	85	70	30	0	Type II Slurry	$55,730
2025-26	320	13	ALAMEDA ST NB	BANNING ST (E)	CITY LIMITS (N)	AC	B	2	1,570	46	71,726	83	69	25	6	Type II Slurry	$65,988
2025-26	320	3	ALAMEDA ST NB	GREENLEAF BLVD (E)	CALDWELL ST (E)	AC	B	2	1,454	39	57,600	70	52	36	12	Type II Slurry	$52,992
2025-26	320	4	ALAMEDA ST NB	CALDWELL ST (E)	ALONDRA BLVD (E)	AC	B	2	1,260	40	47,201	66	41	41	18	ARHM	$276,598
2025-26	320	5	ALAMEDA ST NB	ALONDRA BLVD (E)	MYRRH ST (E)	AC	B	2	1,365	46	59,612	71	63	29	8	Type II Slurry	$54,843
2025-26	320	6	ALAMEDA ST NB	MYRRH ST (E)	COMPTON BLVD (E)	AC	B	2	1,356	46	56,334	73	42	39	19	Type II Slurry	$51,827
2025-26	320	7	ALAMEDA ST NB	COMPTON BLVD (E)	ELM ST (E)	AC	B	2	1,731	46	73,903	76	69	15	16	Type II Slurry	$67,991
2025-26	320	8	ALAMEDA ST NB	ELM ST (E)	ROSECRANS AVE (E)	AC	B	2	967	46	42,925	43	50	49	1	ARHM	$251,541
2025-26	320	9	ALAMEDA ST NB	ROSECRANS AVE (E)	1450' N of ROSECRANS	AC	B	2	1,450	46	61,870	53	45	52	3	ARHM	$362,558
2025-26	330	1	ALAMEDA ST SB	CITY LIMITS (S)	MANVILLE ST (E)	AC	B	4	397	46	27,717	61	91	5	4	ARHM	$162,422
2025-26	330	10	ALAMEDA ST SB	ELM ST (E)	ROSECRANS AVE (E)	AC	B	4	971	60	50,119	76	39	18	43	Type II Slurry	$46,109
2025-26	330	11	ALAMEDA ST SB	ROSECRANS AVE (E)	MEALY ST (E)	AC	B	4	816	58	43,590	66	27	49	24	ARHM	$255,437
2025-26	330	12	ALAMEDA ST SB	MEALY ST (E)	CITY LIMITS (N)	AC	B	4	1,190	58	63,886	70	45	40	15	Type II Slurry	$58,775
2025-26	330	19	ALAMEDA ST SB	CITY LIMITS (N)	WEBER AVE (E)	AC	B	4	916	55	52,444	79	42	41	17	Type II Slurry	$48,248
2025-26	330	2	ALAMEDA ST SB	MANVILLE ST (E)	ARTESIA BLVD (E)	AC	B	4	1,337	46	59,268	53	58	35	7	ARHM	$347,310
2025-26	330	3	ALAMEDA ST SB	ARTESIA BLVD (E)	AUTO DR (S)	AC	B	4	1,176	46	73,222	64	41	59	0	ARHM	$429,081
2025-26	330	4	ALAMEDA ST SB	AUTO DR (S)	GREENLEAF BLVD (E)	AC	B	4	1,405	46	84,323	39	24	64	12	ARHM	$494,133
2025-26	330	5	ALAMEDA ST SB	GREENLEAF BLVD (E)	CALDWELL ST (E)	AC	B	4	1,237	60	68,025	74	31	56	13	Type II Slurry	$62,583
2025-26	330	6	ALAMEDA ST SB	CALDWELL ST (E)	ALONDRA BLVD (E)	AC	B	4	1,455	60	76,868	74	37	27	36	Type II Slurry	$70,719
2025-26	330	7	ALAMEDA ST SB	ALONDRA BLVD (E)	MYRRH ST (E)	AC	B	4	1,423	60	71,475	75	39	16	45	Type II Slurry	$65,757
2025-26	330	8	ALAMEDA ST SB	MYRRH ST (E)	COMPTON BLVD (E)	AC	B	4	1,282	60	69,645	80	35	31	34	Type II Slurry	$64,073
2025-26	330	9	ALAMEDA ST SB	COMPTON BLVD (E)	ELM ST (E)	AC	B	4	1,731	60	84,251	77	38	25	37	Type II Slurry	$77,511
2025-26	560	1	ATLANTIC AVE NB	BRIDGE DECK	SPORTSMAN DR (S)	AC	A	2	281	40	7,470	31	53	37	10	ARHM	$43,774
2025-26	560	10	ATLANTIC AVE NB	BEGIN PCC (300' S/ ALONDRA BLVD)	ALONDRA BLVD	PCC	A	2	310	32	13,281	66	66	5	29	PCC Repair	$53,124
2025-26	560	11	ATLANTIC AVE NB	ALONDRA BLVD	END PCC	PCC	A	2	87	30	2,544	80	100	0	0	PCC Repair	$10,176
2025-26	560	2	ATLANTIC AVE NB	SPORTSMAN DR (S)	ATLANTIC DR (S)	AC	A	2	1,336	44	45,894	29	51	37	12	ARHM	$268,939

FY	BranchID	Sec iD	Name	From	To	Surface Type	Rank	Lanes	L	W	Area	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Maint. Type	Total $
2025-26	560	3	ATLANTIC AVE NB	ATLANTIC DR (S)	BEGIN PCC	AC	A	2	572	34	8,559	32	60	30	10	ARHM	$50,156
2025-26	560	4	ATLANTIC AVE NB	ALONDRA BLVD (E)	CITY LIMITS (N)	AC	A	2	254	28	4,113	11	36	49	15	AC Recon	$63,587
2025-26	560	5	ATLANTIC AVE NB	CITY LIMITS (S)	SAN VINCENTE ST (E)	AC	A	2	378	34	13,341	21	28	50	22	AC Recon	$206,252
2025-26	560	7	ATLANTIC AVE NB	CITY LIMTS (S)	ROSECRANS AVE (E)	AC	A	2	252	34	10,146	33	40	60	0	ARHM	$59,456
2025-26	560	8	ATLANTIC AVE NB	ROSECRANS AVE (E)	CITY LIMIT (N)	AC	A	2	164	34	4,219	53	100	0	0	ARHM	$24,723
2025-26	560	9	ATLANTIC AVE NB	CITY LIMITS (S)	MCMILLAN ST (E)	AC	A	2	134	28	3,821	34	67	33	0	ARHM	$22,391
2025-26	550	1	ATLANTIC AVE SB	MCMILLAN ST (E)	CITY LIMITS (S)	APC	A	2	134	34	2,864	55	36	64	0	ARHM	$16,783
2025-26	550	2	ATLANTIC AVE SB	CITY LIMITS (N)	ROSECRANS AVE (E)	AC	A	2	164	34	5,582	38	70	30	0	ARHM	$32,711
2025-26	550	3	ATLANTIC AVE SB	ROSECRANS AVE (E)	CITY LIMITS (S)	AC	A	2	252	34	8,222	55	48	52	0	ARHM	$48,181
2025-26	550	4	ATLANTIC AVE SB	CITY LIMITS (N)	SAN VINCENTE ST (E)	AC	A	2	393	34	14,216	33	39	44	17	ARHM	$83,306
2025-26	550	5	ATLANTIC AVE SB	SAN VINCENTE ST (E)	CITY LIMITS (S)	AC	A	2	378	34	12,069	25	41	59	0	ARHM	$70,724
2025-26	550	6	ATLANTIC AVE SB	CITY LIMITS (N)	ALONDRA BLVD (E)	AC	A	3	254	34	3,429	19	39	44	17	AC Recon	$53,012
2025-26	550	7	ATLANTIC AVE SB	ALONDRA BLVD (E)	ATLANTIC DR (S)	AC	A	2	572	34	17,358	43	53	44	3	ARHM	$101,718
																	$5,042,434
2026-27	430	15	ALONDRA BLVD EB	PANNES AVE (S)	310' E of HARRIS AVE (S)	AC	C	2	1,443	33	49,602	84	48	52	0	Type II Slurry	$47,122
2026-27	430	17	ALONDRA BLVD EB	315' W of ATLANTIC (S)	ATLANTIC AVE (S)	PCC	C	3	315	33	14,421	78	34	23	43	PCC Repair	$57,684
2026-27	430	18	ALONDRA BLVD EB	ATLANTIC AVE (S)	I-710 SB ON RAMP	AC	C	2	612	30	19,928	69	45	55	0	Type II Slurry	$18,932
2026-27	430	19	ALONDRA BLVD EB	I-710 SB ON RAMP	I-710 OVERPASS	AC	C	2	380	36	16,576	33	46	54	0	ARHM	$100,948
2026-27	430	21	ALONDRA BLVD EB	ATLANTIC AVE	END PCC	PCC	C	2	140	30	4,539	61	70	0	30	PCC Repair	$18,156
2026-27	450	19	ALONDRA BLVD WB	I-710 OVERPASS	I-710 SB ON RAMP	AC	C	2	440	36	16,456	33	29	71	0	ARHM	$100,217
2026-27	450	2	ALONDRA BLVD WB	LIME AVE (S)	ATLANTIC AVE (S)	PCC	C	4	350	50	12,932	80	54	0	46	PCC Repair	$51,728
2026-27	450	21	ALONDRA BLVD WB	ATLANTIC AVE	END PCC	PCC	C	2	140	24	5,202	80	45	16	39	PCC Repair	$20,808
2026-27	450	9	ALONDRA BLVD WB	ALAMEDA ST (S)	WILLOWBROOK AVE (S)	AC	C	2	1,270	34	40,050	52	54	46	0	ARHM	$243,905
2026-27	920	1	CENTER AVE (S)	GREENLEAF BLVD (W)	BENNETT ST (W)	AC	C	2	517	36	10,534	37	21	70	9	ARHM	$64,152
2026-27	920	2	CENTER AVE (S)	BENNETT ST (W)	CALDWELL ST (W)	AC	C	2	658	36	12,748	39	17	65	18	ARHM	$77,635
2026-27	920	4	CENTER AVE (S)	TICHENOR ST (W)	ALONDRA BLVD (W)	AC	C	2	999	20	19,966	26	14	78	8	ARHM	$121,593
2026-27	920	5	CENTER AVE (S)	ALONDRA BLVD (W)	CYPRESS ST (W)	AAC	C	2	641	36	30,803	58	49	49	2	ARHM	$187,590
2026-27	920	6	CENTER AVE (S)	CYPRESS ST (W)	LAUREL ST (W)	AAC	C	2	1,108	36	40,434	64	64	36	0	ARHM	$246,243
2026-27	930	1	CENTRAL AVE NB	CITY LIMITS (S)	91 FWY BRIDGE	AC	A	2	1,208	36	54,370	24	28	69	3	ARHM	$331,113
2026-27	930	2	CENTRAL AVE NB	91 FWY BRIDGE	WALNUT ST (W)	AC	A	2	610	36	23,679	26	40	58	2	ARHM	$144,205
2026-27	3490	12	CENTRAL AVE SB	WALNUT ST (W)	ARTESIA BLVD (W)	AC	A	3	610	30	23,333	33	46	46	8	ARHM	$142,098
2026-27	3490	4	CENTRAL AVE SB	200' N ROSECRANS AVE	ROSECRANS AVE (W)	PCC	A	2	200	35	9,732	67	8	46	46	PCC Repair	$38,928
2026-27	1480	1	GREENLEAF BLVD	CITY LIMIT (W)	NORTHWOOD AVE (S)	AC	C	2	1,167	48	55,891	20	29	67	4	AC Recon	$898,727
2026-27	1480	10	GREENLEAF BLVD	LONG BEACH BLVD (S)	MURIEL AVE (S)	AC	C	2	1,271	20	23,896	50	26	74	0	ARHM	$145,527
2026-27	1480	11	GREENLEAF BLVD	MURIEL AVE (S)	BUTLER AVE (S)	AC	C	2	1,253	20	23,083	51	22	73	5	ARHM	$140,575
2026-27	1480	12	GREENLEAF BLVD	BUTLER AVE (S)	ATLANTIC DR (S)	AC	C	2	1,223	20	21,235	33	22	70	8	ARHM	$129,321
2026-27	1480	2	GREENLEAF BLVD	NORTHWOOD AVE (S)	GREENLEAF DR	AC	C	2	1,145	46	54,174	26	33	67	0	ARHM	$329,920
2026-27	1480	3	GREENLEAF BLVD	GREENLEAF DR	WILMINGTON AVE (S)	AC	C	2	1,085	46	47,815	31	35	64	1	ARHM	$291,193
2026-27	1480	4	GREENLEAF BLVD	WILMINGTON AVE (S)	CENTER AVE (S)	AAC	C	3	1,310	60	58,295	80	89	10	1	Type II Slurry	$55,380
2026-27	1480	5	GREENLEAF BLVD	CENTER AVE (S)	OLEANDER AVE (S)	AAC	C	3	1,365	60	64,810	79	84	16	0	Type II Slurry	$61,570
2026-27	1480	6	GREENLEAF BLVD	OLEANDER AVE (S)	WILLOWBROOK AVE (S)	AAC	C	3	1,345	52	67,552	74	51	49	0	Type II Slurry	$64,174
2026-27	1480	7	GREENLEAF BLVD	WILLOWBROOK AVE (S)	ALAMEDA ST (S)	AAC	C	3	1,630	60	76,009	76	91	8	1	Type II Slurry	$72,209
2026-27	1810	4	MAGNOLIA ST (W)	DWIGHT AVE (N)	KEMP AVE (N)	AC	C	2	670	25	16,933	58	66	5	29	ARHM	$103,122
2026-27	1810	5	MAGNOLIA ST (W)	KEMP AVE (N)	WILMINTON AVE (N)	AC	C	2	657	25	16,249	48	40	26	34	ARHM	$98,956
2026-27	1810	6	MAGNOLIA ST (W)	PAULSEN AVE (N)	MATTHISEN AVE (N)	AC	C	2	557	32	14,125	74	86	0	14	Type II Slurry	$13,419
2026-27	1810	7	MAGNOLIA ST (W)	MATTHISEN AVE (N)	ARANBE AVE	AC	C	2	607	32	15,913	76	100	0	0	Type II Slurry	$15,117
2026-27	1810	8	MAGNOLIA ST (W)	ARANBE AVE (N)	OLEANDER AVE (S)	AC	C	2	945	32	24,707	77	57	26	17	Type II Slurry	$23,472
2026-27	1900	1	MATTHISEN AVE (N)	COMPTON BLVD (W)	SCHOOL ST (W)	AC	B	2	627	26	15,469	84	92	8	0	Type II Slurry	$14,696
2026-27	1900	2	MATTHISEN AVE (N)	SCHOOL ST (W)	ARBUTUS ST (W)	AC	B	2	584	26	14,776	85	85	15	0	Type II Slurry	$14,037
2026-27	1900	3	MATTHISEN AVE (N)	ARBUTUS ST (W)	POPLAR ST (W)	AC	B	2	286	26	7,304	37	28	64	8	ARHM	$44,481
2026-27	1900	4	MATTHISEN AVE (N)	POPLAR ST (W)	SPRUCE ST (W)	AC	B	2	953	26	32,111	36	42	58	0	ARHM	$195,556
2026-27	1900	5	MATTHISEN AVE (N)	SPRUCE ST (W)	CHERRY ST (W)	AC	B	2	493	26	11,329	49	36	64	0	ARHM	$68,994
2026-27	1900	6	MATTHISEN AVE (N)	CHERRY ST (W)	CITY LIMITS	AC	B	2	857	26	22,963	65	100	0	0	ARHM	$139,845
																	$4,933,348
2027-28	840	1	CALDWELL ST (E)	WILLOWBROOK AVE (S)	ALAMEDA ST (S)	AC	B	2	1,417	36	37,509	76	58	42	0	Type II Slurry	$37,134
2027-28	840	4	CALDWELL ST (E)	MAYO AVE (S)	BURRIS AVE (S)	AC	B	2	580	36	16,237	24	29	58	13	ARHM	$102,780
2027-28	840	5	CALDWELL ST (E)	BURRIS AVE (S)	TEMPLE AVE (S)	AC	B	2	889	36	31,256	45	38	62	0	ARHM	$197,850
2027-28	840	6	CALDWELL ST (E)	TEMPLE AVE (S)	CITY LIMITS	AC	B	2	545	36	18,515	31	38	52	10	ARHM	$117,200
2027-28	830	10	CALDWELL ST (W)	OLEANDER AVE (S)	END	AC	B	2	404	36	14,204	44	16	83	1	ARHM	$89,911
2027-28	830	11	CALDWELL ST (W)	END (W)	WILLOWBROOK AVE (S)	AC	B	2	778	36	27,937	79	66	34	0	Type II Slurry	$27,658
2027-28	1040	1	COMPTON BLVD EB	CITY LIMITS (W)	APRILLA AVE (S)	AC	A	2	1,170	35	78,472	41	43	56	1	ARHM	$496,728
2027-28	1040	13	COMPTON BLVD EB	LONG BEACH BLVD (S)	BRADFORD AVE (S)	AC	A	2	1,315	39	47,811	34	44	40	16	ARHM	$302,644

FY	BranchID	Sec iD	Name	From	To	Surface Type	Rank	Lanes	L	W	Area	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Maint. Type	Total $
2027-28	1040	14	COMPTON BLVD EB	BRADFORD AVE (S)	LOCUST AVE (S)	AC	A	2	945	32	35,541	28	47	42	11	ARHM	$224,975
2027-28	1040	15	COMPTON BLVD EB	LOCUST AVE (S)	HARRIS AVE (S)	AC	A	2	640	32	18,005	25	46	39	15	ARHM	$113,972
2027-28	1040	16	COMPTON BLVD EB	HARRIS AVE (S)	CITY LIMITS (E)	AC	A	2	145	32	4,179	28	46	44	10	ARHM	$26,453
2027-28	1040	2	COMPTON BLVD EB	APRILLA AVE (S)	CENTRAL AVE (S)	AC	A	2	1,320	32	91,479	45	36	48	16	ARHM	$579,062
2027-28	1040	3	COMPTON BLVD EB	CENTRAL AVE (S)	TAJAUTA AVE (S)	AC	A	2	1,640	32	49,963	69	26	34	40	Type II Slurry	$49,463
2027-28	1040	4	COMPTON BLVD EB	TAJAUTA AVE (S)	DWIGHT AVE (S)	AC	A	2	1,310	32	40,273	64	28	36	36	ARHM	$254,928
2027-28	1040	5	COMPTON BLVD EB	DWIGHT AVE (S)	WILMINGTON AVE (S)	AC	A	2	1,310	30	37,741	65	23	53	24	ARHM	$238,901
2027-28	1040	55	COMPTON BLVD EB	WILLIAMS AVE (E)	CITY LIMITS (E)	AC	A	2	98	38	3,028	19	44	36	20	AC Recon	$50,658
2027-28	1040	6	COMPTON BLVD EB	WILMINGTON AVE (S)	ARANBE AVE (N)	AC	A	2	1,715	28	43,623	68	45	36	19	Type II Slurry	$43,187
2027-28	1040	7	COMPTON BLVD EB	ARANBE AVE (N)	ACACIA AVE (S)	AC	A	2	1,625	28	45,197	65	64	31	5	ARHM	$286,097
2027-28	1040	8	COMPTON BLVD EB	ACACIA AVE (S)	WILLOWBROOK AVE (S)	AC	A	2	670	32	21,431	57	39	54	7	ARHM	$135,658
2027-28	1050	1	COMPTON BLVD WB	CITY LIMITS (E)	WILLIAMS AVE (E)	AC	A	2	95	38	3,451	24	37	45	18	ARHM	$21,845
2027-28	1050	10	COMPTON BLVD WB	WILLOWBROOK AVE (N)	ACACIA AVE (N)	AC	A	2	660	26	16,205	76	52	22	26	Type II Slurry	$16,043
2027-28	1050	11	COMPTON BLVD WB	ACACIA AVE (N)	ARANBE AVE (N)	AC	A	2	1,620	32	44,456	68	53	32	15	Type II Slurry	$44,011
2027-28	1050	12	COMPTON BLVD WB	ARANBE AVE (N)	WILMINGTON AVE (N)	AC	A	2	1,720	28	49,222	53	46	41	13	ARHM	$311,575
2027-28	1050	13	COMPTON BLVD WB	WILMINGTON AVE (N)	DWIGHT AVE (N)	AC	A	2	1,310	26	34,776	72	38	43	19	Type II Slurry	$34,428
2027-28	1050	14	COMPTON BLVD WB	DWIIGHT AVE (N)	TAJAUTA AVE (N)	AC	A	2	1,320	26	31,059	52	31	68	1	ARHM	$196,603
2027-28	1050	15	COMPTON BLVD WB	TAJAUTA AVE (N)	CENTRAL AVE (N)	AC	A	2	1,640	26	40,375	65	28	66	6	ARHM	$255,574
2027-28	1050	2	COMPTON BLVD WB	CITY LIMITS (E)	HARRIS AVE (S)	AC	A	2	145	38	4,248	54	38	58	4	ARHM	$26,890
2027-28	1050	3	COMPTON BLVD WB	HARRIS AVE (S)	LOCUST AVE (N)	AC	A	2	511	28	17,316	25	43	35	22	ARHM	$109,610
2027-28	1050	4	COMPTON BLVD WB	LOCUST AVE (N)	BRADFORD AVE (N)	AC	A	2	955	32	37,093	27	37	38	25	ARHM	$234,799
2027-28	1050	5	COMPTON BLVD WB	BRADFORD AVE (N)	LONG BEACH BLVD (N)	AC	A	2	1,310	37	51,014	33	51	41	8	ARHM	$322,919
																	$4,949,556
2028-29	3060	1	WILMINGTON AVE NB	VICTORIA AVE (W)	ELECTRIC FACILITY	AC	A	3	1,177	46	47,520	36	32	68	0	ARHM	$313,157
2028-29	3060	10	WILMINGTON AVE NB	COMPTON BLVD (W)	PALMER ST (W)	AC	A	2	933	36	29,161	33	46	47	7	ARHM	$192,171
2028-29	3060	11	WILMINGTON AVE NB	PALMER ST (W)	POPLAR ST (W)	AC	A	2	612	32	22,744	34	42	50	8	ARHM	$149,883
2028-29	3060	12	WILMINGTON AVE NB	POPLAR ST (W)	ROSECRANS AVE (W)	AC	A	2	1,232	33	47,855	31	33	58	9	ARHM	$315,364
2028-29	3060	18	WILMINGTON AVE NB	EL SEGUNDO BLVD (W)	CITY LIMITS (N)	AC	A	2	583	30	18,194	26	33	63	4	ARHM	$119,898
2028-29	3060	2	WILMINGTON AVE NB	ELECTRIC FACILITY	91 FWY BRIDGE	AC	A	2	1,051	42	35,072	30	31	51	18	ARHM	$231,124
2028-29	3060	3	WILMINGTON AVE NB	91 FWY BRIDGE	WALNUT ST (W)	AC	A	3	875	36	28,095	30	43	41	16	ARHM	$185,146
2028-29	3060	4	WILMINGTON AVE NB	WALNUT ST (W)	GREENLEAF BLVD (W)	AC	A	3	1,697	34	60,202	36	39	57	4	ARHM	$396,731
2028-29	3060	5	WILMINGTON AVE NB	GREENLEAF BLVD (W)	CALDWELL ST (W)	AC	A	2	1,197	28	30,110	45	40	50	10	ARHM	$198,425
2028-29	3060	6	WILMINGTON AVE NB	CALDWELL ST (W)	ALONDRA BLVD (W)	AC	A	2	1,696	26	44,151	47	45	48	7	ARHM	$290,955
2028-29	3060	7	WILMINGTON AVE NB	ALONDRA BLVD (W)	156TH ST (W)	AC	A	2	1,008	36	35,516	30	45	53	2	ARHM	$234,050
2028-29	3060	8	WILMINGTON AVE NB	156TH ST (W)	LAUREL ST (W)	AC	A	2	570	36	21,318	39	45	55	0	ARHM	$140,486
2028-29	3060	9	WILMINGTON AVE NB	LAUREL ST (W)	COMPTON BLVD (W)	AC	A	2	1,156	36	39,690	34	38	62	0	ARHM	$261,557
2028-29	3070	1	WILMINGTON AVE SB	CITY LIMITS (N)	EL SEGUNDO BLVD (W)	AC	A	2	583	32	21,187	15	29	62	9	AC Recon	$368,654
2028-29	3070	10	WILMINGTON AVE SB	COMPTON BLVD (W)	LAUREL ST (W)	AC	A	2	1,156	40	39,493	39	42	48	10	ARHM	$260,259
2028-29	3070	11	WILMINGTON AVE SB	LAUREL ST (W)	156TH ST (W)	AC	A	2	569	36	19,990	34	43	52	5	ARHM	$131,734
2028-29	3070	12	WILMINGTON AVE SB	156TH ST (W)	ALONDRA BLVD (W)	AC	A	2	1,012	36	36,783	29	34	56	10	ARHM	$242,400
2028-29	3070	13	WILMINGTON AVE SB	ALONDRA BLVD (W)	CALDWELL ST (W)	AC	A	2	1,685	31	53,363	71	61	39	0	Type II Slurry	$54,964
2028-29	3070	14	WILMINGTON AVE SB	CALDWELL ST (W)	GREENLEAF BLVD (W)	AC	A	2	1,185	32	32,120	44	32	64	4	ARHM	$211,671
2028-29	3070	15	WILMINGTON AVE SB	GREENLEAF BLVD (W)	WALNUT ST (W)	AC	A	2	1,688	36	60,952	32	49	45	6	ARHM	$401,674
2028-29	3070	16	WILMINGTON AVE SB	WALNUT ST (W)	91 FWY BRIDGE	AC	A	3	875	36	25,583	29	54	38	8	ARHM	$168,592
2028-29	3070	17	WILMINGTON AVE SB	91 FWY BRIDGE	ELECTRIC FACILITY	AC	A	2	1,051	36	32,397	30	39	50	11	ARHM	$213,496
																	$5,082,392
			Locals														
2024-25	10	1	127TH PL (W)	DALHART AVE (N)	GRANDEE AVE (N)	AC	E	2	865	27	23,135	59	32	68	0	AC Grind-Overlay	$89,301
2024-25	10	2	127TH PL (W)	GRANDEE AVE (N)	127TH ST (W)	AC	E	2	575	27	15,789	37	27	73	0	AC Grind-Overlay	$60,946
2024-25	20	1	127TH ST (W)	KENESAW AVE (N)	CITY LIMITS	AC	E	2	1,173	27	32,115	45	32	68	0	AC Grind-Overlay	$123,964
2024-25	50	2	131TH ST (W)	SLATER AVE (M)	COMPTON AVE (N)	AC	E	2	497	26	12,922	41	14	86	0	AC Grind-Overlay	$49,879
2024-25	50	3	131TH ST (W)	COMPTON AVE (N)	GRANDEE AVE (N)	AC	E	2	953	26	24,468	25	45	51	4	AC Grind-Overlay	$94,446
2024-25	50	4	131TH ST (W)	GRANDEE AVE (N)	WILMINGTON AVE (N)	AC	E	2	1,212	26	31,108	28	48	47	5	AC Grind-Overlay	$120,077
2024-25	50	5	131TH ST (W)	WILMINGTON AVE (N)	END	AAC	E	2	913	26	24,239	60	23	58	19	AC Grind-Overlay	$93,563
2024-25	60	5	132ND ST (W)	GRANDEE AVE (N)	WILMINGTON AVE (N)	AC	E	2	1,210	36	31,762	39	10	86	4	AC Grind-Overlay	$122,601
2024-25	90	4	134TH ST (W)	COMPTON AVE (N)	GRANDEE AVE (N)	AC	E	2	956	36	24,246	62	9	66	25	AC Grind-Overlay	$93,590
2024-25	90	6	134TH ST (W)	BAHAMA AVE (N)	CENTRAL AVE (S)	AC	E	2	522	36	18,252	77	69	0	31	Type II Slurry	$11,499
2024-25	120	6	137TH ST (W)	GRAHAM AVE (N)	WILMINGTON AVE (N)	AC	E	2	927	36	28,493	84	23	68	9	Type II Slurry	$17,951
2024-25	120	8	137TH ST (W)	ANZAC AVE (N)	GRAPE AVE (N)	AC	E	2	248	36	8,716	85	9	91	0	Type II Slurry	$5,491
2024-25	120	9	137TH ST (W)	GRAPE AVE (N)	PAULSEN AVE (N)	AC	E	2	246	36	6,681	63	5	95	0	AC Grind-Overlay	$25,789
2024-25	130	5	138TH ST (W)	WILMINTON AVE (N)	PAULSEN AVE (N)	AC	E	2	752	36	23,023	33	23	75	2	AC Grind-Overlay	$88,869

FY	BranchID	Sec iD	Name	From	To	Surface Type	Rank	Lanes	L	W	Area	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Maint. Type	Total $
2024-25	140	1	139TH ST (W)	KEMP AVE (N)	WILMINGTON AVE (N)	AC	E	2	176	36	3,858	10	26	74	0	AC Recon	$57,368
2024-25	140	2	139TH ST (W)	WILMINGTON AVE (N)	PAULSEN AVE (N)	AAC	E	2	641	36	19,564	81	41	47	12	Type II Slurry	$12,325
2024-25	300	1	ACACIA AVE	APRA ST (W)	MANVILLE ST (W)	AC	I	2	775	40	34,584	6	34	60	6	AC Recon	$514,264
2024-25	300	10	ACACIA AVE	COMPTON BLVD (W)	ARBUTUS ST (W)	AC	E	2	1,295	33	32,465	83	65	20	15	Type II Slurry	$20,453
2024-25	300	11	ACACIA AVE	ARBUTUS ST (W)	CEDAR ST (W)	AC	E	2	780	33	20,758	79	73	27	0	Type II Slurry	$13,078
2024-25	300	12	ACACIA AVE	CEDAR ST (W)	ROSECRANS AVE (W)	AC	E	2	765	33	22,427	69	57	39	4	Type II Slurry	$14,129
2024-25	300	13	ACACIA AVE	ROSECRANS AVE (W)	DOUGLAS ST (W)	AC	E	2	525	40	17,239	77	54	46	0	Type II Slurry	$10,861
2024-25	300	14	ACACIA AVE	DOUGLAST ST (W)	WINONA AVE (W)	AC	E	2	850	40	30,906	76	52	48	0	Type II Slurry	$19,471
2024-25	300	15	ACACIA AVE	WINONA AVE (W)	END (N)	AC	E	2	230	18	6,905	78	65	35	0	Type II Slurry	$4,350
2024-25	300	3	ACACIA AVE	WALNUT ST (W)	RR TRACKS	AC	I	2	710	44	26,201	18	21	79	0	AC Recon	$389,609
2024-25	300	4	ACACIA AVE	RR TRACKS	CAROB ST (W)	AC	I	2	225	44	8,266	46	33	67	0	AC Grind-Overlay	$31,907
2024-25	300	5	ACACIA AVE	GREENLEAF BLVD (W)	BENNETT ST (W)	AAC	E	2	515	33	14,658	26	16	78	6	AC Grind-Overlay	$56,580
2024-25	480	1	ANZAC AVE (N)	131ST ST (W)	NORD ST (W)	AAC	E	2	815	36	21,915	81	48	25	27	Type II Slurry	$13,806
2024-25	480	2	ANZAC AVE (N)	NORD ST (W)	STOCKWELL ST (W)	AAC	E	2	742	36	20,245	68	32	43	25	Type II Slurry	$12,754
2024-25	480	3	ANZAC AVE (N)	STOCKWELL ST (W)	137TH ST (W)	AAC	E	2	637	36	18,543	82	48	52	0	Type II Slurry	$11,682
2024-25	480	4	ANZAC AVE (N)	CYPRESS ST (W)	END (N)	AC	E	2	211	39	8,092	61	73	26	1	AC Grind-Overlay	$31,235
2024-25	500	1	ARANBE AVE	COCOA ST (W)	CYPRESS ST (W)	AC	E	2	265	32	8,876	52	38	62	0	AC Grind-Overlay	$34,261
2024-25	500	2	ARANBE AVE	CYPRESS ST (W)	WINDIGO ST	AC	E	2	635	34	19,175	48	43	56	1	AC Grind-Overlay	$74,016
2024-25	500	3	ARANBE AVE	COMPTON BLVD (W)	PALMER ST (W)	AC	E	2	915	26	22,104	64	32	33	35	AC Grind-Overlay	$85,321
2024-25	500	4	ARANBE AVE	PALMER ST (W)	ELM ST (W)	AC	E	2	813	26	20,375	63	63	0	37	AC Grind-Overlay	$78,648
2024-25	500	5	ARANBE AVE	ELM ST (W)	ROSECRANS AVE (W)	AC	E	2	930	34	26,630	61	75	16	9	AC Grind-Overlay	$102,792
2024-25	500	6	ARANBE AVE	ROSECRANS AVE (W)	CRESSEY ST (W)	AC	E	2	722	29	17,162	72	49	48	3	Type II Slurry	$10,812
2024-25	500	7	ARANBE AVE	CRESSEY ST (W)	CITY LIMITS (N)	AC	E	2	574	26	14,825	79	66	31	3	Type II Slurry	$9,340
2024-25	610	1	BAHAMA AVE (N)	132ND ST (N)	134TH ST (N)	AC	E	2	698	36	16,634	69	23	46	31	Type II Slurry	$10,479
2024-25	610	2	BAHAMA AVE (N)	134TH ST (W)	LITTLETON ST	AC	E	2	344	36	9,114	68	28	46	26	Type II Slurry	$5,742
2024-25	630	1	BANDERA ST	STOCKWELL ST (W)	136TH ST (W)	AC	E	2	375	36	9,786	56	28	43	29	AC Grind-Overlay	$37,774
2024-25	670	1	BELHAVEN AV	132ND ST (W)	KEENE AVE (N)	AC	E	2	933	36	24,779	69	39	31	30	Type II Slurry	$15,611
2024-25	710	1	BLISS ST (W)	PAULSEN AVE (N)	END	AC	E	2	89	36	1,913	16	3	97	0	AC Recon	$28,446
2024-25	940	1	CENTRAL AVE FRONTAGE	SAM LITTLETON ST	134TH ST (W)	AC	E	2	540	28	14,270	27	21	66	13	AC Grind-Overlay	$55,082
2024-25	940	2	CENTRAL AVE FRONTAGE	134TH ST (W)	132ND ST (W)	AC	E	2	628	28	16,745	16	13	75	12	AC Recon	$248,998
2024-25	940	3	CENTRAL AVE FRONTAGE	132ND ST (W)	CITY LIMITS (N)	AC	E	2	134	28	2,708	10	9	81	10	AC Recon	$40,268
2024-25	940	4	CENTRAL AVE FRONTAGE	CITY LIMIT (S)	PIRU ST (W)	AC	E	2	921	27	23,004	9	10	86	4	AC Recon	$342,069
2024-25	940	5	CENTRAL AVE FRONTAGE	154TH ST	CDS (N)	AC	E	2	710	26	19,365	60	51	49	0	AC Grind-Overlay	$74,749
2024-25	950	1	CHERRY ST (W)	END (W)	KEMP AVE (N)	AC	E	2	433	36	11,069	14	8	80	12	AC Recon	$164,596
2024-25	950	2	CHERRY ST (W)	KEMP AVE (N)	WILMNGTON AVE (N)	AAC	E	2	648	36	15,424	56	26	72	2	AC Grind-Overlay	$59,537
2024-25	950	3	CHERRY ST (W)	WILMINGTON AVE (N)	PAULSEN AVE (N)	AC	E	2	574	36	13,387	72	72	13	15	Type II Slurry	$8,434
2024-25	950	4	CHERRY ST (W)	PAULSEN AVE (N)	MATTHISEN AVE (N)	AC	E	2	564	36	14,096	75	88	10	2	Type II Slurry	$8,880
2024-25	950	5	CHERRY ST (W)	MATTHISEN AVE (N)	ARANBE AVE (N)	AC	E	2	614	36	15,343	77	90	9	1	Type II Slurry	$9,666
2024-25	950	6	CHERRY ST (W)	ARANBE AVE (N)	OLEANDER AVE (N)	AC	E	2	688	36	17,420	69	64	34	2	Type II Slurry	$10,975
2024-25	3170	1	CORLETT AVE (N)	132ND ST (W)	LITTLETON ST	AC	E	2	1,163	36	32,087	76	43	30	27	Type II Slurry	$20,215
2024-25	1110	1	CRESSEY ST (W)	END (W)	END (E)	AC	E	2	793	36	34,927	81	77	23	0	Type II Slurry	$22,004
2024-25	1110	2	CRESSEY ST (W)	END (W)	KEMP AVE (N)	AC	E	2	507	36	12,639	12	10	86	4	AC Recon	$187,942
2024-25	1110	3	CRESSEY ST (W)	KEMP AVE (N)	WILMINGTON AVE (N)	AAC	E	2	654	36	15,265	34	13	84	3	AC Grind-Overlay	$58,923
2024-25	1110	4	CRESSEY ST (W)	WILMINGTON AVE (N)	PAULSEN AVE (N)	AC	E	2	582	36	14,053	71	74	6	20	Type II Slurry	$8,853
2024-25	1110	5	CRESSEY ST (W)	PAULSEN AVE (N)	MATTHISEN AVE (N)	AC	E	2	570	36	13,864	71	91	7	2	Type II Slurry	$8,734
2024-25	1110	6	CRESSEY ST (W)	MATTHISEN AVE (N)	ARANBE AVE (N)	AC	E	2	611	36	15,134	65	80	19	1	AC Grind-Overlay	$58,417
2024-25	1110	7	CRESSEY ST (W)	ARANBE AVE (N)	END (E)	AC	E	2	903	36	22,439	65	83	17	0	AC Grind-Overlay	$86,615
2024-25	1120	1	CULVER AVE (N)	CITY LIMITS	WINONA ST (W)	AC	E	2	278	36	9,938	74	59	39	2	Type II Slurry	$6,261
2024-25	1120	2	CULVER AVE (N)	WINONA ST (W)	DOUGLAS ST (W)	AC	E	2	857	36	31,444	62	35	65	0	AC Grind-Overlay	$121,374
2024-25	1120	3	CULVER AVE (N)	DOUGLAS ST (W)	ROSECRANS AVE (W)	AC	E	2	679	36	24,206	47	25	75	0	AC Grind-Overlay	$93,435
2024-25	1120	4	CULVER AVE (N)	ROSECRANS AVE (E)	CEDAR AVE (N)	AC	E	2	747	36	20,917	39	35	65	0	AC Grind-Overlay	$80,740
2024-25	1120	7	CULVER AVE (N)	SCHOOL ST (W)	COMPTON BLVD (W)	AC	E	2	578	36	15,414	61	56	36	8	AC Grind-Overlay	$59,498
2024-25	2190	1	PAULSEN AVE (N)	131ST ST (W)	NORD ST (W)	AAC	E	2	790	28	21,872	51	15	85	0	AC Grind-Overlay	$84,426
2024-25	2190	2	PAULSEN AVE (N)	NORD ST (W)	STOCKWELL ST (W)	AAC	E	2	734	28	20,522	44	12	88	0	AC Grind-Overlay	$79,215
2024-25	2190	3	PAULSEN AVE (N)	STOCKWELL ST (W)	138TH ST (W)	AAC	E	2	888	28	26,435	66	16	84	0	AC Grind-Overlay	$102,039
2024-25	2190	4	PAULSEN AVE (N)	138TH ST (W)	CHERRY ST (W)	AC	E	2	978	28	25,721	56	69	30	1	AC Grind-Overlay	$99,283
2024-25	2190	5	PAULSEN AVE (N)	CHERRY ST (W)	SPRUCE ST (W)	AC	E	2	492	28	10,553	66	69	31	0	AC Grind-Overlay	$40,735
2024-25	2190	6	PAULSEN AVE (N)	POPLAR ST (W)	ARBUTUS ST (W)	AC	E	2	260	26	6,780	60	37	63	0	AC Grind-Overlay	$26,171
2024-25	2190	7	PAULSEN AVE (N)	SCHOOL ST (W)	COMPTON BLVD (W)	AC	E	2	635	26	16,341	78	61	39	0	Type II Slurry	$10,295
2024-25	2190	8	PAULSEN AVE (N)	ARBUTUS ST (W)	SCHOOL ST (W)	AC	E	2	556	26	14,150	77	38	46	16	Type II Slurry	$8,915
2024-25	3420	1	PAULSEN AVE (S)	PALM ST (W)	ALMOND ST (W)	AC	E	2	577	28	17,652	71	99	0	1	Type II Slurry	$11,121
																	$5,003,542

FY	BranchID	Sec iD	Name	From	To	Surface Type	Rank	Lanes	L	W	Area	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Maint. Type	Total $
2025-26	40	1	130TH ST (W)	SLATER AVE (N)	COMPTON AVE (N)	AC	E	2	570	36	18,953	13	13	87	0	AC Recon	$293,013
2025-26	40	4	130TH ST (W)	WILLMINGTON AVE (N)	CITY LIMITS	AC	E	2	225	26	5,694	7	39	46	15	AC Recon	$88,029
2025-26	3480	1	ACACIA CT	ACACIA AVE (S)	END (W)	AC	I	2	285	40	13,674	52	48	52	0	AC Grind-Overlay	$54,833
2025-26	310	1	ADANA ST (E)	BUTLER AVE (S)	STONEACRE AVE (S)	AAC	E	2	520	36	13,687	63	22	78	0	AC Grind-Overlay	$54,885
2025-26	320	1	ALAMEDA ST NB	END (S)	AUTO DR (S)	AC	I	2	715	33	21,050	80	75	25	0	Type II Slurry	$13,893
2025-26	320	2	ALAMEDA ST NB	AUTO DR (S)	GREENLEAF BLVD (E)	AC	I	2	1,395	42	49,826	70	60	30	10	Type II Slurry	$32,885
2025-26	370	1	ALHAMBRA AVE	POPPY AVE (N)	ARLINGTON ST (E)	AC	E	2	951	16	15,884	34	36	63	1	AC Grind-Overlay	$63,695
2025-26	370	2	ALHAMBRA AVE	ARLINGTON ST (E)	END (N)	AC	E	2	911	14	12,507	17	34	54	12	AC Recon	$193,358
2025-26	3450	1	ALLEY SAN MARCUS	END (W)	CITY LIMITS (E)	AC	O	1	1,240	15	11,745	42	61	32	7	AC Grind-Overlay	$47,097
2025-26	400	1	ALMOND ST (W)	DWIGHT AVE (S)	DWIGHT AVE (N)	AC	E	2	287	36	9,321	67	39	61	0	AC Grind-Overlay	$37,377
2025-26	400	2	ALMOND ST (W)	DWIGHT AVE (N)	KEMP AVE (S)	AAC	E	2	986	36	30,512	56	17	83	0	AC Grind-Overlay	$122,353
2025-26	400	3	ALMOND ST (W)	GRAPE AVE (S)	SHERER PL (S)	AC	E	2	742	36	23,315	49	36	64	0	AC Grind-Overlay	$93,493
2025-26	400	4	ALMOND ST (W)	MATTHISEN AVE (S)	BARRON AVE (S)	AC	E	2	533	36	15,756	87	79	18	3	Type II Slurry	$10,399
2025-26	400	5	ALMOND ST (W)	BARRON ST (S)	OLEANDER AVE (N)	AC	E	2	691	36	24,185	68	72	27	1	Type II Slurry	$15,962
2025-26	400	6	ALMOND ST (W)	OLEANDER AVE (N)	END	AC	E	2	598	36	21,622	46	23	66	11	AC Grind-Overlay	$86,704
2025-26	680	1	BENNETT ST (E)	WILLOWBROOK AVE (S)	ALAMEDA ST (S)	AC	E	2	1,466	36	37,416	65	46	52	2	AC Grind-Overlay	$150,038
2025-26	680	10	BENNETT ST (E)	OLEANDER AVE (S)	ACACIA AVE (S)	AC	E	2	652	40	21,375	53	38	62	0	AC Grind-Overlay	$85,714
2025-26	680	2	BENNETT ST (E)	CHESTER AVE (S)	BURRIS AVE (S)	AC	E	2	1,149	36	30,850	15	22	68	10	AC Recon	$476,941
2025-26	680	3	BENNETT ST (E)	BURRIS AVE (S)	CITY LIMITS	AC	E	2	1,629	36	42,941	18	23	62	15	AC Recon	$663,868
2025-26	680	4	BENNETT ST (E)	MCKINLEY AVE	WADSWORTH AVE (S)	AC	E	2	1,285	38	43,275	32	28	68	4	AC Grind-Overlay	$173,533
2025-26	680	8	BENNETT ST (E)	WILMINGTON AVE (S)	CENTER AVE (S)	AC	E	2	1,280	30	38,239	34	26	47	27	AC Grind-Overlay	$153,338
2025-26	680	9	BENNETT ST (E)	CENTER AVE (S)	OLEANDER AVE (S)	AC	E	2	1,355	32	43,764	45	37	48	15	AC Grind-Overlay	$175,494
2025-26	980	1	CLEMMER DR (E)	TARTAR LN (S)	END	AC	E	2	654	36	16,003	78	33	37	30	Type II Slurry	$10,562
2025-26	1000	2	CLYMAR AVE (S)	156TH ST (W)	CYPRESS ST (W)	AAC	E	2	1,483	36	41,593	73	19	39	42	Type II Slurry	$27,451
2025-26	1000	3	CLYMAR AVE (S)	CYPRESS ST (W)	ALONDRA BLVD	AC	E	2	260	32	8,067	77	15	85	0	Type II Slurry	$5,324
2025-26	1000	4	CLYMAR AVE (S)	ALONDRA BLVD	CLAUDE ST (W)	AC	E	2	785	30	23,280	43	44	56	0	AC Grind-Overlay	$93,353
2025-26	1260	1	ELM ST (E)	WILLOWBROOK AVE (N)	TAMARIND AVE (N)	AC	E	2	694	25	17,001	74	75	25	0	Type II Slurry	$11,221
2025-26	1260	2	ELM ST (E)	TAMARIND AVE (N)	ALAMEDA ST (N)	AC	E	2	543	25	9,131	39	39	59	2	AC Grind-Overlay	$36,615
2025-26	1260	3	ELM ST (E)	ALAMEDA ST (N)	ROSS AVE (N)	AC	E	2	407	25	9,260	38	37	44	19	AC Grind-Overlay	$37,133
2025-26	1260	4	ELM ST (E)	ROSE AVE (N)	SANTA FE AVE (N)	AC	E	2	955	26	21,050	55	60	39	1	AC Grind-Overlay	$84,411
2025-26	1260	5	ELM ST (E)	SANTA FE AVE (N)	BURRIS AVE (N)	AC	E	2	1,289	26	33,163	52	38	52	10	AC Grind-Overlay	$132,984
2025-26	1260	6	ELM ST (E)	BURRIS AVE (N)	LONG BEACH BLVD (N)	AC	E	2	1,084	26	25,863	29	30	66	4	AC Grind-Overlay	$103,711
2025-26	3200	1	ELM ST (W)	DWIGHT AVE (N)	PACIFIC AVE (W)	AC	E	2	590	25	15,064	55	49	51	0	AC Grind-Overlay	$60,407
2025-26	3200	2	ELM ST (W)	WILMINGTON AVE (N)	END	AC	E	2	573	25	13,955	15	21	68	11	AC Recon	$215,744
2025-26	3200	3	ELM ST (W)	MATTHISEN AVE (N)	OLEANDER AVE (N)	AC	E	2	1,303	25	33,635	70	60	32	8	Type II Slurry	$22,199
2025-26	3200	4	ELM ST (W)	OLEANDER AVE (N)	WILLOWBROOK AVE (N)	AC	E	2	1,577	25	40,319	54	65	30	5	AC Grind-Overlay	$161,679
2025-26	3300	1	LOCUST AVE (S)	COMPTON BLVD (E)	MYRRH ST (E)	AC	E	2	1,343	25	33,024	39	54	46	0	AC Grind-Overlay	$132,426
2025-26	2040	1	NORTHWOOD AVE (S)	GREENLEAF BLVD (W)	166TH ST (W)	AC	E	2	612	27	18,955	76	100	0	0	Type II Slurry	$12,510
2025-26	2040	2	NORTHWOOD AVE (S)	166TH ST (W)	CALDWELL ST (W)	AC	E	2	502	27	15,777	78	86	0	14	Type II Slurry	$10,413
2025-26	2040	3	NORTHWOOD AVE (S)	CALDWELL ST (W)	TICHENOR ST (W)	AC	E	2	580	27	17,978	78	100	0	0	Type II Slurry	$11,865
2025-26	2040	4	NORTHWOOD AVE (S)	TICHENOR ST (W)	ALONDRA BLVD (W)	AC	E	2	1,210	36	37,939	81	69	31	0	Type II Slurry	$25,040
2025-26	2040	5	NORTHWOOD AVE (S)	156TH ST (W)	LAUREL ST (W)	AC	E	2	568	33	16,222	50	35	56	9	AC Grind-Overlay	$65,050
2025-26	2310	1	POINSETTIA AVE (N)	COMPTON BLVD (E)	PALMER ST (E)	AC	E	2	847	31	20,649	47	53	46	1	AC Grind-Overlay	$82,802
2025-26	2310	2	POINSETTIA AVE (N)	PALMER ST (E)	ELM ST (E)	AC	E	2	886	28	22,625	48	66	34	0	AC Grind-Overlay	$90,726
2025-26	2310	3	POINSETTIA AVE (N)	ELM ST (E)	ROSECRANS AVE (E)	AC	E	2	970	27	24,703	34	58	37	5	AC Grind-Overlay	$99,059
2025-26	2320	1	POINSETTIA AVE (S)	BENNETT ST (E)	CALDWELL ST (E)	AC	E	2	719	35	19,099	35	30	54	16	AC Grind-Overlay	$76,587
2025-26	2320	2	POINSETTIA AVE (S)	CALDWELL ST (E)	MARCELLA ST (E)	AC	E	2	530	35	16,610	69	88	12	0	Type II Slurry	$10,963
2025-26	2320	3	POINSETTIA AVE (S)	MARCELLA ST (E)	ALONDRA BLVD (E)	AC	E	2	810	35	25,335	65	30	40	30	AC Grind-Overlay	$101,593
2025-26	2320	4	POINSETTIA AVE (S)	ALONDRA BLVD (E)	CYPRESS ST (E)	AC	E	2	690	29	17,534	80	100	0	0	Type II Slurry	$11,572
2025-26	2320	5	POINSETTIA AVE (S)	CYPRESS ST (E)	MYRRH ST (E)	AC	E	2	640	28	17,994	77	92	0	8	Type II Slurry	$11,876
2025-26	2320	6	POINSETTIA AVE (S)	MYRRH ST (E)	LAUREL ST (E)	AC	E	2	655	32	18,970	64	75	19	6	AC Grind-Overlay	$76,070
2025-26	2320	7	POINSETTIA AVE (S)	LAUREL ST (E)	COMPTON BLVD (E)	AC	E	2	674	30	18,424	57	72	8	20	AC Grind-Overlay	$73,880
																	$4,982,130
2024-25	110	7	136TH ST (W)	CENTRAL AVE (N)	PARMELEE AVE (N)	AC	E	2	1,096	36	31,330	10	3	94	3	AC Recon	$503,786
2026-27	1100	1	CRANE AVE (N)	ROSECRANS AVE (E)	ELM ST (E)	AAC	E	1	968	17	14,963	65	33	67	0	AC Grind-Overlay	$62,396
2026-27	1100	2	CRANE AVE (N)	ELM ST (E)	PALMER ST (E)	AAC	E	1	894	17	14,580	64	47	50	3	AC Grind-Overlay	$60,799
2026-27	1100	3	CRANE AVE (N)	PALMER ST (E)	COMPTON BLVD (E)	AAC	E	1	842	17	13,846	67	59	13	28	AC Grind-Overlay	$57,738
2026-27	1100	4	CRANE AVE (N)	ALONDRA BLVD (E)	MYRRH ST (E)	AAC	E	2	1,363	27	35,593	63	73	26	1	AC Grind-Overlay	$148,423
2026-27	3610	1	CRANE CT	MARCELLE ST (E)	END (N)	AC	E	2	383	31	10,795	81	100	0	0	Type II Slurry	$7,341
2026-27	3610	2	CRANE CT	MARCELLE ST	END PCC	PCC	E	2	93	31	2,276	24	21	60	19	PCC Repair	$9,104
2025-26	1260	7	ELM ST (E)	LONG BEACH BLVD (N)	BULLIS RD (N)	AC	E	2	421	30	10,151	9	30	42	28	AC Recon	$163,228
2026-27	1430	1	GRAHAM AVE (N)	STOCKWELL ST (W)	137TH ST (W)	AC	E	2	671	36	17,636	15	16	74	10	AC Recon	$283,587

FY	BranchID	Sec iD	Name	From	To	Surface Type	Rank	Lanes	L	W	Area	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Maint. Type	Total $
2026-27	1440	1	GRANDEE AVE	BENNETT ST (W)	CALDWELL ST (W)	AC	E	2	948	34	30,357	21	12	88	0	AC Recon	$488,141
2026-27	1440	2	GRANDEE AVE	CALDWELL ST (W)	END (N)	AC	E	2	250	34	9,205	19	15	84	1	AC Recon	$148,016
2026-27	1440	3	GRANDEE AVE	REEVE ST (W)	ALONDRA BLVD (W)	AC	E	2	562	34	19,472	30	40	55	5	AC Grind-Overlay	$81,198
2026-27	1440	4	GRANDEE AVE	POPLAR ST (W)	SPRUCE ST (W)	AC	E	2	982	29	25,364	20	5	95	0	AC Recon	$407,853
2026-27	1450	1	GRAPE AVE (N)	131ST ST (W)	NORD ST (W)	AAC	E	2	817	36	21,920	62	24	62	14	AC Grind-Overlay	$91,406
2026-27	1450	2	GRAPE AVE (N)	NORD ST (W)	STOCKWELL ST (W)	AAC	E	2	738	36	20,019	72	31	49	20	Type II Slurry	$13,613
2026-27	1450	3	GRAPE AVE (N)	STOCKWELL ST (W)	137TH ST (W)	AAC	E	2	639	36	17,324	66	31	69	0	AC Grind-Overlay	$72,241
2026-27	1450	4	GRAPE AVE (N)	PALM ST (W)	ALMOND ST (W)	AC	E	2	580	36	18,068	49	41	57	2	AC Grind-Overlay	$75,344
2026-27	1450	5	GRAPE AVE (N)	CYPRESS ST (W)	END (N)	AC	E	2	150	36	6,380	63	86	0	14	AC Grind-Overlay	$26,605
2026-27	2070	1	OLEANDER AVE (N)	COMPTON BLVD (W)	SCHOOL ST (W)	AC	E	2	618	28	14,780	66	73	27	0	AC Grind-Overlay	$61,633
2026-27	2070	2	OLEANDER AVE (N)	SCHOOL ST (W)	ARBUTUS ST (W)	AC	E	2	579	28	15,070	69	100	0	0	Type II Slurry	$10,248
2026-27	2070	3	OLEANDER AVE (N)	ARBUTUS ST (W)	CEDAR ST (W)	AC	E	2	757	28	19,085	46	52	47	1	AC Grind-Overlay	$79,584
2026-27	2070	4	OLEANDER AVE (N)	CEDAR ST (W)	ROSECRANS AVE (W)	AC	E	2	737	28	17,883	37	38	62	0	AC Grind-Overlay	$74,572
2026-27	2070	5	OLEANDER AVE (N)	ROSECRANS AVE (W)	CRESSEY ST (W)	AC	E	2	726	28	18,121	69	88	12	0	Type II Slurry	$12,322
2026-27	2070	6	OLEANDER AVE (N)	CRESSEY ST (W)	CITY LIMITS	AC	E	2	806	28	19,498	53	94	6	0	AC Grind-Overlay	$81,307
2026-27	2080	1	OLEANDER AVE (S)	COMPTON BLVD (W)	ALMOND ST (W)	AC	E	2	672	33	20,602	51	46	12	42	AC Grind-Overlay	$85,910
2026-27	2080	2	OLEANDER AVE (S)	ALMOND ST (W)	MYRRH ST (W)	AC	E	2	698	33	24,479	65	62	23	15	AC Grind-Overlay	$102,077
2026-27	2080	4	OLEANDER AVE (S)	ALONDRA BLVD (W)	REEVE ST (W)	AC	E	2	659	33	18,797	38	42	53	5	AC Grind-Overlay	$78,383
2026-27	2080	5	OLEANDER AVE (S)	REEVE ST (W)	CALDWELL ST (W)	AC	E	2	928	33	25,317	54	44	53	3	AC Grind-Overlay	$105,572
2026-27	2080	6	OLEANDER AVE (S)	CALDWELL ST (W)	BENNETT ST (W)	AC	E	2	659	36	19,613	65	20	54	26	AC Grind-Overlay	$81,786
2026-27	2080	7	OLEANDER AVE (S)	BENNETT ST (W)	GREENLEAF BLVD (W)	AC	E	2	515	36	15,003	74	31	23	46	Type II Slurry	$10,202
2026-27	2290	1	PLAZA DR	GREENLEAF BLVD (E)	GATEWAY DR	AC	E	2	202	36	7,099	76	38	43	19	Type II Slurry	$4,827
2026-27	2300	1	PLUM ST	KEMP AVE (N)	WILMINGTON AVE (N)	AAC	E	2	654	27	15,226	28	16	84	0	AC Grind-Overlay	$63,492
2026-27	2300	2	PLUM ST	WILMINGTON AVE (N)	PAULSEN AVE (N)	AC	E	2	567	28	13,948	63	55	30	15	AC Grind-Overlay	$58,163
2026-27	2300	3	PLUM ST	PAULSEN AVE (N)	MATTHISEN AVE (N)	AC	E	2	567	28	14,050	73	96	4	0	Type II Slurry	$9,554
2026-27	2300	4	PLUM ST	MATTHISEN AVE (N)	ARANBE AVE (S)	AC	E	2	614	28	15,498	70	97	0	3	Type II Slurry	$10,539
2026-27	2300	5	PLUM ST	ARANBE AVE (N)	OLEANDER AVE (N)	AC	E	2	685	28	17,263	68	87	11	2	Type II Slurry	$11,739
2026-27	2470	1	SAN MARCUS ST	END (W)	BRADFIELD AVE (N)	AC	E	2	450	29	13,648	73	45	54	1	Type II Slurry	$9,281
2026-27	2470	2	SAN MARCUS ST	BRADFIELD AVE (N)	HOLLY AVE (N)	AC	E	2	660	30	17,555	82	29	69	2	Type II Slurry	$11,937
2026-27	2470	3	SAN MARCUS ST	HOLLY AVE (N)	END (W)	AC	E	2	130	31	4,447	40	31	68	1	AC Grind-Overlay	$18,544
2026-27	2490	1	SAN VINCENTE ST	END (W)	BRADFIELD AVE (N)	AC	E	2	445	28	14,013	65	45	54	1	AC Grind-Overlay	$58,434
2026-27	2490	2	SAN VINCENTE ST	BRADFIELD AVE (N)	HOLLY AVE (N)	AC	E	2	485	28	25,873	34	31	68	1	AC Grind-Overlay	$107,890
2026-27	2490	4	SAN VINCENTE ST	CITY LIMITS w/o ATLANTIC	ATLANTIC AVE (S)	AC	E	2	100	39	3,714	60	40	60	0	AC Grind-Overlay	$15,487
2026-27	2490	5	SAN VINCENTE ST	ATLANTIC AVE (S)	CITY LIMITS e/o ATLANTIC	AC	E	2	120	39	4,583	8	10	82	8	AC Recon	$73,695
2026-27	2490	6	SAN VINCENTE ST	WILLIAMS AVE (S)	CITY LIMIT (E)	AC	E	2	95	36	3,534	54	44	56	0	AC Grind-Overlay	$14,737
2026-27	2780	1	TARTAR LN	SANTE FE AVE (S)	CLEMMER DR (E)	AC	E	1	810	18	16,037	51	12	70	18	AC Grind-Overlay	$66,874
2026-27	2780	2	TARTAR LN	CLEMMER DR (E)	IGREENLEAF BLVD (E)	AC	E	1	700	18	10,898	49	14	72	14	AC Grind-Overlay	$45,445
2026-27	2790	1	TEMPLE AVE	GREENLEAF BLVD (E)	SCHINNER ST (E)	AC	E	2	890	28	21,696	64	24	76	0	AC Grind-Overlay	$90,472
2026-27	2790	2	TEMPLE AVE	SCHINNER ST (E)	CALDWELL ST (E)	AC	E	2	445	28	11,778	63	26	74	0	AC Grind-Overlay	$49,114
2026-27	2790	3	TEMPLE AVE	CALDWELL ST (E)	MARCELLE ST (E)	AC	E	2	530	40	29,463	33	42	41	17	AC Grind-Overlay	$122,861
2026-27	2790	4	TEMPLE AVE	MARCELLE ST (E)	CITY LIMITS (E)	AC	E	2	520	40	26,409	56	33	67	0	AC Grind-Overlay	$110,126
2026-27	2950	1	WAYSIDE ST	PAULSEN AVE (N)	CITY LIMITS (E)	AC	E	2	65	22	1,231	51	44	56	0	AC Grind-Overlay	$5,133
2026-27	2970	1	WHITE AVE	CALDWELL ST (E)	ALONDRA BLVD (E)	AAC	E	2	1,330	31	36,095	41	24	47	29	AC Grind-Overlay	$150,516
2026-27	2980	2	WHITEMARSH AVE	CALDWELL ST (W)	RAYMOND ST (W)	AC	E	2	1,150	31	32,971	52	10	84	6	AC Grind-Overlay	$137,489
2026-27	2990	2	WILLIAMS AVE	CITY LIMITS (S)	MCMILLIAN ST (E)	AC	E	2	85	31	3,002	83	100	0	0	Type II Slurry	$2,041
2026-27	2990	3	WILLIAMS AVE	ROSECRANS AVE	CITY LIMITS (N)	AC	E	2	75	31	3,881	78	100	0	0	Type II Slurry	$2,639
2026-27	3000	4	WILLOW AVE	COMPTON BLVD (E)	PALMER ST (E)	AC	E	2	835	31	19,874	82	84	13	3	Type II Slurry	$13,514
2026-27	3000	7	WILLOW AVE	ROSECRANS AVE (E)	PECK ST (E)	AC	E	2	655	30	17,154	79	69	31	0	Type II Slurry	$11,665
2026-27	3000	8	WILLOW AVE	PECK ST (E)	TUCKER ST (E)	AC	E	2	659	30	17,764	75	57	23	20	Type II Slurry	$12,080
2026-27	3000	9	WILLOW AVE	TUCKER ST (E)	END (N)	AC	E	2	435	29	12,055	76	91	7	2	Type II Slurry	$8,197
2026-27	3020	1	WILLOWBROOK AVE	MANVILLE ST (E)	STANLEY ST (E)	AC	I	2	815	26	20,740	27	19	81	0	AC Grind-Overlay	$86,486
2026-27	3030	8	WILLOWBROOK AVE (S) NB	END (S)	ELM ST (E)	AC	E	2	557	35	21,204	68	29	71	0	Type II Slurry	$14,419
2026-27	3080	1	WINONA AVE	ACACIA AVE (N)	WILLOWBROOK AVE (N)	AC	E	2	723	40	26,513	60	30	70	0	AC Grind-Overlay	$110,559
2026-27	3080	2	WINONA AVE	WILLOWBROOK AVE (N)	MONA BLVD (N)	AC	E	2	546	40	18,763	33	15	85	0	AC Grind-Overlay	$78,242
																	$5,070,607
2027-28	3190	1	DWIGHT AVE (N)	CRESSEY ST (W)	ROSECRANS AVE (W)	AC	E	2	319	36	8,857	67	48	52	0	AC Grind-Overlay	$38,439
2027-28	3190	2	DWIGHT AVE (N)	ROSECRANS AVE (W)	MAPLE ST (W)	AC	E	2	487	36	11,891	56	27	67	6	AC Grind-Overlay	$51,607
2027-28	3190	3	DWIGHT AVE (N)	MAPLE ST (W)	POPLAR ST	AC	E	2	742	28	20,906	86	100	0	0	Type II Slurry	$14,843
2027-28	3190	4	DWIGHT AVE (N)	ARBUTUS ST (W)	SCHOOL ST (W)	AC	E	2	724	36	17,907	59	25	75	0	AC Grind-Overlay	$77,716
2027-28	3190	5	DWIGHT AVE (N)	SCHOOL ST (W)	COMPTON BLVD (W)	AC	E	2	487	36	11,066	50	24	75	1	AC Grind-Overlay	$48,026
2027-28	3190	6	DWIGHT AVE (N)	POPLAR ST	ARBUTUS ST (W)	AC	E	2	263	26	6,718	36	27	65	8	AC Grind-Overlay	$29,156
2027-28	1220	1	DWIGHT AVE (S)	COMPTON BLVD (W)	ALMOND ST (W)	AC	E	2	834	36	26,670	54	34	53	13	AC Grind-Overlay	$115,748

FY	BranchID	Sec iD	Name	From	To	Surface Type	Rank	Lanes	L	W	Area	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Maint. Type	Total $
2027-28	1220	2	DWIGHT AVE (S)	MYRRH ST (S)	156TH ST (W)	AC	E	2	269	36	7,603	40	37	47	16	AC Grind-Overlay	$32,997
2027-28	1220	3	DWIGHT AVE (S)	ALONDRA BLVD (W)	CALDWELL ST (W)	AC	E	2	1,723	36	48,308	29	14	82	4	AC Grind-Overlay	$209,657
2027-28	1220	5	DWIGHT AVE (S)	ALMOND ST (W)	MYRRH ST (W)	AC	E	2	585	36	18,339	80	39	61	0	Type II Slurry	$13,021
2027-28	1570	1	HILLFORD AVE (N)	END (N)	POPLAR ST (W)	AC	E	2	397	36	13,269	42	20	80	0	AC Grind-Overlay	$57,587
2027-28	1570	2	HILLFORD AVE (N)	ARBUTUS ST (W)	BRAZIL ST (W)	AC	E	2	249	36	6,817	43	54	46	0	AC Grind-Overlay	$29,586
2027-28	1570	3	HILLFORD AVE (N)	BRAZIL ST (W)	PALMER ST (W)	AC	E	2	270	36	8,156	19	10	90	0	AC Recon	$136,450
2027-28	3570	1	HILLFORD AVE (S)	166TH ST (W)	CALDWELL ST (W)	AC	E	2	486	40	17,647	14	11	89	0	AC Recon	$295,234
2027-28	3570	2	HILLFORD AVE (S)	CALDWELL ST (W)	163RD ST (W)	AC	E	2	313	40	12,109	19	6	91	3	AC Recon	$202,584
2027-28	3570	3	HILLFORD AVE (S)	TICHENOR ST (W)	REEVE ST (W)	AC	E	2	590	30	16,258	49	64	23	13	AC Grind-Overlay	$70,560
2027-28	3570	4	HILLFORD AVE (S)	REEVE ST (W)	RAYMOND ST (W)	AC	E	2	292	30	9,860	39	55	45	0	AC Grind-Overlay	$42,792
2027-28	1590	1	HOLMES AVE (N)	STOCKWELL ST (W)	136TH ST (W)	AC	E	2	374	36	9,800	15	27	61	12	AC Recon	$163,954
2027-28	1920	1	MCDIVITT AVE (N)	ROSECRANS AVE (E)	PECK ST (E)	AC	E	2	657	28	16,794	66	69	26	5	AC Grind-Overlay	$72,886
2027-28	1920	2	MCDIVITT AVE (N)	PECK ST (E)	TUCKER ST (E)	AC	E	2	655	28	17,105	69	67	32	1	Type II Slurry	$12,145
2027-28	1920	3	MCDIVITT AVE (N)	TUCKER ST (E)	END (N)	AC	E	2	480	28	12,615	56	76	23	1	AC Grind-Overlay	$54,749
2027-28	3470	1	MCKINLEY AVE (N)	ROSECRANS AVE (W)	139TH ST (W)	AC	I	2	1,125	40	38,756	75	12	71	17	Type II Slurry	$27,517
2027-28	3470	2	MCKINLEY AVE (N)	139TH ST	SAM LITTLETON ST	AC	E	2	1,176	25	44,919	84	70	29	1	Type II Slurry	$31,892
2027-28	3470	3	MCKINLEY AVE (N)	SAM LITTLETON ST	SALINAS AVE (N)	AC	E	2	155	37	7,331	45	26	47	27	AC Grind-Overlay	$31,817
2027-28	1930	1	MCKINLEY AVE (S)	TICHENOR ST (W)	CALDWELL ST (W)	AC	E	2	348	28	10,430	25	32	68	0	AC Grind-Overlay	$45,266
2027-28	1930	2	MCKINLEY AVE (S)	CALDWELL ST (W)	BILLINGS ST (W)	AC	E	2	720	28	20,092	39	32	59	9	AC Grind-Overlay	$87,199
2027-28	1940	1	MCMILLAN ST	BULLIS RD (N)	BRADFIELD AVE (N)	AAC	E	2	1,033	31	28,161	43	32	68	0	AC Grind-Overlay	$122,219
2027-28	1940	10	MCMILLAN ST	GIBSON AVE (S)	CITY LIMITS (W)	AC	E	1	193	17	3,180	6	9	85	6	AC Recon	$53,201
2027-28	1940	11	MCMILLAN ST	STONEACRE AVE (N)	111' W of CASTLEGATE	AC	E	1	353	17	5,551	21	29	67	4	AC Recon	$92,868
2027-28	1940	3	MCMILLAN ST	PINE ST (E)	HARRIS AVE (N)	AC	E	1	306	17	9,192	35	15	85	0	AC Grind-Overlay	$39,893
2027-28	1940	4	MCMILLAN ST	HARRIS AVE (N)	WALDORF DR (N)	AC	E	1	563	17	10,539	41	13	87	0	AC Grind-Overlay	$45,739
2027-28	1940	5	MCMILLAN ST	WALDORF DR (N)	COOKACRE AVE (S)	AC	E	1	879	17	18,174	62	9	91	0	AC Grind-Overlay	$78,875
2027-28	1940	6	MCMILLAN ST	COOKACRE AVE (S)	LIME AVE (S)	AC	E	1	539	17	8,423	56	22	78	0	AC Grind-Overlay	$36,556
2027-28	2140	2	PALMER ST (E)	END (W)	BRADFIELD (N)	AC	E	2	460	30	13,852	66	42	58	0	AC Grind-Overlay	$60,118
2027-28	2140	3	PALMER ST (E)	BULLIS RD	LONG BEACH BLVD (N)	PCC	I	2	420	30	10,942	19	8	76	16	PCC Recon	$346,095
2027-28	2150	1	PALMER ST (W)	HILLFORD AVE (N)	NESTOR AVE (N)	AC	E	2	720	27	19,164	11	23	77	0	AC Recon	$320,614
2027-28	2150	2	PALMER ST (W)	NESTOR AVE (N)	TAJAUTA AVE (N)	AC	E	2	723	27	18,895	60	64	36	0	AC Grind-Overlay	$82,004
2027-28	2150	3	PALMER ST (W)	TAJAUTA AVE (N)	MAIE AVE (N)	AC	E	2	736	27	19,286	22	17	77	6	AC Recon	$322,655
2027-28	2150	4	PALMER ST (W)	BROADACRES AVE (N)	DWIGHT AVE (N)	AC	E	2	368	27	8,434	16	5	83	12	AC Recon	$141,101
2027-28	2150	5	PALMER ST (W)	DWIGHT AVE (N)	KEMP AVE (N)	AC	E	2	670	27	16,746	15	5	77	18	AC Recon	$280,161
2027-28	2150	6	PALMER ST (W)	KEMP AVE (N)	END	AC	E	2	458	27	11,958	10	12	78	10	AC Recon	$200,057
2027-28	2150	8	PALMER ST (W)	WILMINGTON AVE (N)	MATTHISEN AVE (N)	AC	E	2	1,137	27	28,790	73	48	39	13	Type II Slurry	$20,441
2027-28	2150	9	PALMER ST (W)	MATTHISEN AVE (N)	OLEANDER AVE (N)	AC	E	2	1,554	27	40,366	83	100	0	0	Type II Slurry	$28,660
2027-28	2370	1	REEVE ST	APRILLA AVE (S)	CENTER AVE (S)	AC	E	2	1,470	35	40,741	29	48	52	0	AC Grind-Overlay	$176,816
2027-28	2370	2	REEVE ST	CENTER AVE (S)	NESTOR AVE (S)	AC	E	2	830	36	26,025	49	57	43	0	AC Grind-Overlay	$112,949
2027-28	2370	3	REEVE ST	OLEANDER AVE (S)	ACACIA AVE (S)	AC	E	2	620	26	16,916	53	45	55	0	AC Grind-Overlay	$73,415
2027-28	2370	4	REEVE ST	ACACIA AVE (S)	WILLOWBROOK AVE (S)	AC	E	2	630	27	16,190	76	98	0	2	Type II Slurry	$11,495
2027-28	2370	5	REEVE ST	WILLOWBROOK AVE (S)	TAMARIND AVE (S)	AC	E	2	577	28	15,892	52	42	58	0	AC Grind-Overlay	$68,971
2027-28	2370	6	REEVE ST	TAMARIND AVE (S)	ALAMEDA ST (S)	AC	E	2	752	28	18,719	68	73	27	0	Type II Slurry	$13,290
2027-28	2370	7	REEVE ST	GRANDEE AVE (S)	END (W)	AC	E	2	133	28	5,926	32	39	57	4	AC Grind-Overlay	$25,719
2027-28	2830	1	VAN NESS AVE	ELM ST (E)	ROSECRANS AVE (E)	AC	E	2	955	29	24,755	78	38	8	54	Type II Slurry	$17,576
2027-28	2830	2	VAN NESS AVE	ROSECRANS AVE (E)	PECK ST (E)	AC	E	2	840	28	22,315	63	52	48	0	AC Grind-Overlay	$96,847
2027-28	2830	3	VAN NESS AVE	PECK ST (E)	TUCKER ST (E)	AC	E	2	422	28	11,735	62	70	22	8	AC Grind-Overlay	$50,930
2027-28	2830	4	VAN NESS AVE	TUCKER ST (E)	POPPY AVE (E)	AC	E	2	362	29	9,249	61	65	6	29	AC Grind-Overlay	$40,141
																	$4,952,835
2028-29	150	1	145TH ST (W)	HILLFORD AVE (N)	ALBERTSON AVE (N)	AC	E	2	714	36	18,472	53	35	57	8	AC Grind-Overlay	$83,493
2028-29	150	2	145TH ST (W)	ALBERTSON AVE (N)	NESTOR AVE (N)	AC	E	2	264	36	6,305	51	42	58	0	AC Grind-Overlay	$28,499
2028-29	160	1	149TH ST (E)	CITY LIMITS	CENTRAL AVE (N)	AC	E	2	155	36	4,252	9	3	96	1	AC Recon	$73,985
2028-29	170	1	150TH ST (E)	CITY LIMITS	CENTRAL AVE (N)	AC	E	2	158	36	3,759	24	33	67	0	AC Grind-Overlay	$16,991
2028-29	180	1	151ST ST (W)	CENTRAL AVE (S)	NESTOR AVE (S)	AC	E	2	835	36	24,902	40	28	54	18	AC Grind-Overlay	$112,557
2028-29	180	2	151ST ST (W)	NESTOR AVE (S)	TAJAUTA AVE (S)	AC	E	2	796	36	25,057	54	29	39	32	AC Grind-Overlay	$113,258
2028-29	180	5	151ST ST (W)	DWIGHT AVE (N)	KEMP AVE (S)	AAC	E	2	568	36	14,525	41	32	68	0	AC Grind-Overlay	$65,653
2028-29	190	2	152ND ST (W)	CENTRAL AVE (S)	NESTOR AVE (S)	AC	E	2	793	36	23,841	63	51	34	15	AC Grind-Overlay	$107,761
2028-29	190	3	152ND ST (W)	NESTOR AVE (S)	TAJAUTA AVE (S)	AC	E	2	803	36	25,231	60	42	37	21	AC Grind-Overlay	$114,044
2028-29	190	6	152ND ST (W)	DWIGHT AVE (N)	KEMP AVE (S)	AAC	E	2	578	36	15,934	55	13	70	17	AC Grind-Overlay	$72,022
2028-29	200	2	153RD ST (W)	CENTRAL AVE (S)	NESTOR AVE (S)	AC	E	2	756	36	23,036	73	54	12	34	Type II Slurry	$17,047
2028-29	200	3	153RD ST (W)	NESTOR AVE (S)	TAJAUTA AVE (S)	AC	E	2	800	36	25,031	67	47	35	18	AC Grind-Overlay	$113,140
2028-29	210	5	154TH ST (W)	CENTRAL AVE (S)	NESTOR AVE (S)	AC	E	2	717	36	21,742	67	58	17	25	AC Grind-Overlay	$98,274
2028-29	210	6	154TH ST (W)	NESTOR AVE (S)	TAJAUTA AVE (S)	AC	E	2	800	36	24,786	47	43	41	16	AC Grind-Overlay	$112,033

FY	BranchID	Sec iD	Name	From	To	Surface Type	Rank	Lanes	L	W	Area	PCI	PCI Pct Climate	PCI Pct Load	PCI Pct Other	Maint. Type	Total $
2028-29	210	7	154TH ST (W)	TAJAUTA AVE (S)	DWIGHT AVE (S)	AAC	E	2	1,031	36	39,611	55	42	58	0	AC Grind-Overlay	$179,042
2028-29	220	1	155TH ST (W)	CENTRAL AVE (S)	NESTOR AVE (N)	AC	E	2	676	36	15,515	65	39	34	27	AC Grind-Overlay	$70,128
2028-29	220	2	155TH ST (W)	NESTOR AVE (N)	TAJAUTA AVE (N)	AC	E	2	811	36	25,357	56	49	26	25	AC Grind-Overlay	$114,614
2028-29	230	1	156TH ST (W)	CLYMAR AVE (S)	CORLETT AVE	AC	E	2	1,186	36	32,474	25	22	69	9	AC Grind-Overlay	$146,782
2028-29	230	3	156TH ST (W)	CENTRAL AVE (S)	TAJAUTA AVE (S)	AC	E	2	1,453	36	51,769	51	28	72	0	AC Grind-Overlay	$233,996
2028-29	230	4	156TH ST (W)	TAJAUTA AVE (S)	DWIGHT AVE (S)	AC	E	2	1,320	36	47,812	67	47	46	7	AC Grind-Overlay	$216,110
2028-29	230	5	156TH ST (W)	DWIGHT AVE (S)	WILMINGTON AVE (N)	AC	E	2	1,324	36	46,595	59	53	47	0	AC Grind-Overlay	$210,609
2028-29	880	1	CARSON PL (E)	TAMARIND AVE	ALAMEDA ST (N)	PCC	E	2	387	26	16,708	74	21	79	0	PCC Repair	$66,832
2028-29	890	1	CASTLEGATE AVE (N)	CITY LIMITS	OLANDA ST	AC	E	2	942	36	25,156	23	17	69	14	AC Grind-Overlay	$113,705
2028-29	890	2	CASTLEGATE AVE (N)	OLANDA ST	MCMILLAN ST (E)	AC	E	2	877	36	23,137	21	23	77	0	AC Recon	$402,584
2028-29	3130	2	CASTLEGATE AVE (S)	CITY LIMITS	CALDWELL ST (E)	AAC	E	2	1,348	36	43,541	78	53	40	7	Type II Slurry	$32,220
2028-29	3130	3	CASTLEGATE AVE (S)	CALDWELL ST (E)	ADANA ST (E)	AAC	E	2	972	36	26,346	83	26	74	0	Type II Slurry	$19,496
2028-29	900	2	CASWELL AVE (S)	156TH ST (W)	CYPRESS ST (W)	AAC	E	2	1,482	36	41,356	78	32	11	57	Type II Slurry	$30,603
2028-29	3140	2	CEDAR ST (E)	WILLOWBROOK AVE	ALAMEDA ST	PCC	E	2	916	36	23,921	23	33	55	12	PCC Repair	$95,684
2028-29	910	1	CEDAR ST (W)	END (W)	WILMINGTON AVE (N)	AC	E	2	1,145	36	24,269	16	16	84	0	AC Recon	$422,281
2028-29	910	2	CEDAR ST (W)	MATTHISEN AVE (N)	ARANBE AVE (S)	AC	E	2	609	36	15,633	87	95	0	5	Type II Slurry	$11,568
2028-29	910	3	CEDAR ST (W)	S ARNADE AVE (S)	OLEANDER AVE (N)	AC	E	2	692	36	17,134	71	98	0	2	Type II Slurry	$12,679
2028-29	910	4	CEDAR ST (W)	OLEANDER AVE (N)	ACACIA AVE (N)	AC	E	2	841	36	20,832	65	69	29	2	AC Grind-Overlay	$94,161
2028-29	910	5	CEDAR ST (W)	ACACIA AVE (N)	CULVER AVE (N)	AC	E	2	491	36	13,537	78	95	0	5	Type II Slurry	$10,017
2028-29	1380	2	GIBSON ST (S)	ROSECRANS AVE (E)	CITY LIMITS	AC	E	2	312	35	8,156	72	59	41	0	Type II Slurry	$6,035
2028-29	1380	3	GIBSON ST (S)	CITY LIMITS	CITY LIMITS	AC	E	2	212	35	7,422	69	39	45	16	Type II Slurry	$5,492
2028-29	1380	4	GIBSON ST (S)	CITY LIMITS	LINSLEY ST (E)	AC	E	2	1,478	35	41,804	58	42	55	3	AC Grind-Overlay	$188,954
2028-29	1390	2	GLADYS ST (E)	SHERER PL (S)	END (W)	AC	E	2	165	35	7,592	45	47	52	1	AC Grind-Overlay	$34,316
2028-29	1400	1	GLENCOE AVE (E)	LONG BEACH BLVD (S)	TEMPLE AVE (S)	AC	E	2	637	36	16,294	34	30	67	3	AC Grind-Overlay	$73,649
2028-29	1400	2	GLENCOE AVE (E)	TEMPLE AVE (S)	BURRIS AVE (S)	AC	E	2	859	36	22,545	33	21	62	17	AC Grind-Overlay	$101,903
2028-29	3220	1	GLENCOE ST (W)	END (W)	WILLOWBROOK AVE (S)	AC	E	2	312	36	9,171	71	45	53	2	Type II Slurry	$6,787
2028-29	3220	2	GLENCOE ST (W)	END (E)	ACACIA AVE (S)	AC	E	2	166	36	4,403	46	24	76	0	AC Grind-Overlay	$19,902
2028-29	3220	3	GLENCOE ST (W)	ACACIA AVE (S)	OLEANDER AVE (S)	AAC	E	2	677	36	16,761	31	21	79	0	AC Grind-Overlay	$75,760
2028-29	1880	3	MAPLE ST (W)	ARANBE AVE (N)	END (E)	AC	E	2	899	26	22,894	71	83	14	3	Type II Slurry	$16,942
2028-29	1890	1	MARCELLE ST (E)	END (W)	POINTSETTIA AVE (S)	AC	E	2	454	32	15,614	64	82	0	18	AC Grind-Overlay	$70,575
2028-29	1890	2	MARCELLE ST (E)	POINTSETTIA AVE (S)	TEMPLE AVE (S)	AC	E	2	516	32	17,756	67	88	0	12	AC Grind-Overlay	$80,257
2028-29	1890	3	MARCELLE ST (E)	LONG BEACH BLVD (S)	CITY LIMIT (E)	AC	E	2	349	28	5,291	45	65	24	11	AC Grind-Overlay	$23,915
2028-29	3330	1	MATTHISEN AVE (S)	COMPTON BLVD (W)	ALMOND ST (W)	AC	E	2	887	30	25,147	67	18	81	1	AC Grind-Overlay	$113,664
2028-29	3330	2	MATTHISEN AVE (S)	ALMOND ST (W)	LAUREL ST (W)	AC	E	2	375	30	11,298	81	44	54	2	Type II Slurry	$8,361
2028-29	3370	1	MATTHISEN CR	CYPRESS ST (W)	END	AC	E	2	230	33	8,730	58	72	24	4	AC Grind-Overlay	$39,460
2028-29	2390	1	ROSE AVE	COMPTON BLVD (E)	PALMER ST (E)	AC	E	2	845	27	18,121	62	35	39	26	AC Grind-Overlay	$81,907
2028-29	2390	2	ROSE AVE	PALMER ST (E)	ELM ST (E)	AC	E	2	880	20	16,914	48	25	44	31	AC Grind-Overlay	$76,451
2028-29	2390	3	ROSE AVE	ELM ST (E)	ROSECRANS AVE (E)	AC	E	2	950	28	25,074	53	36	22	42	AC Grind-Overlay	$113,334
2028-29	2390	4	ROSE AVE	ROSECRANS AVE (E)	TUCKER ST (E)	AC	E	2	1,310	29	33,957	55	44	41	15	AC Grind-Overlay	$153,486
2028-29	2390	5	ROSE AVE	TUCKER ST (E)	OAKS ST (E)	AC	E	2	820	27	21,715	65	71	19	10	AC Grind-Overlay	$98,152
																	$5,001,169